



## ADRIA S4 HP

LED-5L08E950ZS11/098/L100 NK3HST MS 3K##

[WWW.OSMONT.CZ](http://WWW.OSMONT.CZ)

## ADRIA S4 HP

Product code: ADR62377

Type: LED-5L08E950ZS11/098/L100 NK3HST MS 3K##

Short description of the luminaire: Brass polished | pendant  
LED light with emergency backup combined ( with Self-test) |  
TRIPLEX OPAL hand blown glass shade| cable pendant ( with inner  
support wire) 100 cm |

### Technical

|                           |                                   |
|---------------------------|-----------------------------------|
| Types of luminaires       | Emergency combined<br>SELFTEST    |
| Mounting type             | Suspended - cable                 |
| Base material             | brass                             |
| Shade material            | three-layer glass TRIPLEX<br>OPAL |
| Base color                | polished brass                    |
| Shade color               | white                             |
| Holding the shade         | steel holder                      |
| Mounting location         | ceiling                           |
| Width                     | 500 mm                            |
| Length                    | 500 mm                            |
| Height                    | 500 mm                            |
| Hinge length              | 1000 mm                           |
| mounting holes (diameter) | 3xØ5mm                            |
| Cable entrance            | 2xØ16mm                           |
| Energy Class              | D                                 |
| Impact strength           | IK01                              |
| Operating temperature     | from -20°C to +30°C               |



### Electric

|                    |                     |
|--------------------|---------------------|
| Power consumption  | 59 W                |
| Ingress Protection | IP40                |
| Socket             | LED modul           |
| Battery type       | LiFePO4             |
| Emergency time     | 3 hours             |
| SELFTEST           | yes                 |
| terminal block     | snap terminal block |

### Luminous

|                                                |              |
|------------------------------------------------|--------------|
| Lum. flux of luminaire                         | 8100 lm      |
| Lum. flux of light source                      | 9200 lm      |
| Lum. flux of light source in<br>emergency mode | 200 lm       |
| Temperature                                    | 3000 K       |
| Rated life time LED L80/B10                    | 100000 hours |
| CRI                                            | Ra80         |
| MacAdam                                        | 3            |
| Blue light hazard                              | Risk group 0 |

Eulum data for calculation programs are available at  
[www.osmont.cz](http://www.osmont.cz).

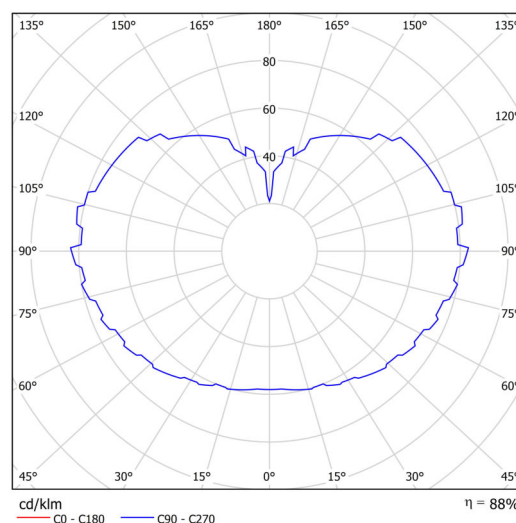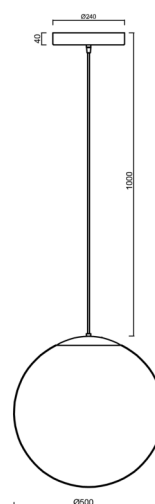

Logistic

|                   |                      |
|-------------------|----------------------|
| EAN               | 8591728147327        |
| Weight NTTO       | 5.8 Kg               |
| Weight BTTO       | 7.32 Kg              |
| Number of cartons | 2 pcs                |
| Package volume    | 0.148 m <sup>3</sup> |
| Package 1 width   | 0.52 m               |
| Package 1 length  | 0.52 m               |
| Package 1 height  | 0.53 m               |
| Warranty*         | 60 months            |

\*The warranty for the batteries is valid for 12 months from the date of purchase.

Installation dimensions:



## Additional assortment:

## Lampshade

| Product code | Name | Color | Description   | Picture                                                                             | Drawing |
|--------------|------|-------|---------------|-------------------------------------------------------------------------------------|---------|
| 20041        | 098  | white | příslušenství |  |         |