



AURA 2


Private: LED-1L18E250K53/042 NK3HST 3K#

WWW.OSMONT.CZ

AURA 2

Product code: AUR61006

Type: Private: LED-1L18E250K53/042 NK3HST 3K#





Technical

Types of luminaires	Emergency combined
Mounting type	surface mounted
Base material	steel
Shade material	three-layer glass TRIPLEX OPAL
Shade color	white
Holding the shade	folding system
Mounting location	ceiling/wall
Width	280 mm
Length	280 mm
Height	120 mm
mounting holes (diameter)	4xØ5mm
Installation wire (diameter)	2xØ16mm
Impact strength	IK01




Electric

Power consumption	11 W
Ingress Protection	IP43
Socket	LED modul
Battery type	LiFePO4
Emergency time	3 hours
terminal block	snap terminal block

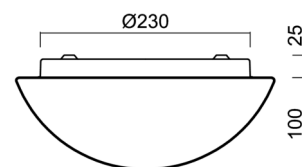

Luminous

Lum. flux of luminaire	1090 lm
Lum. flux of light source	1610 lm
Lum. flux of light source in emergency mode	200 lm
Temperature	3000 K
Rated life time LED L80/B10	100000 hours
CRI	Ra80
MacAdam	3
Blue light hazard	Risk group 0

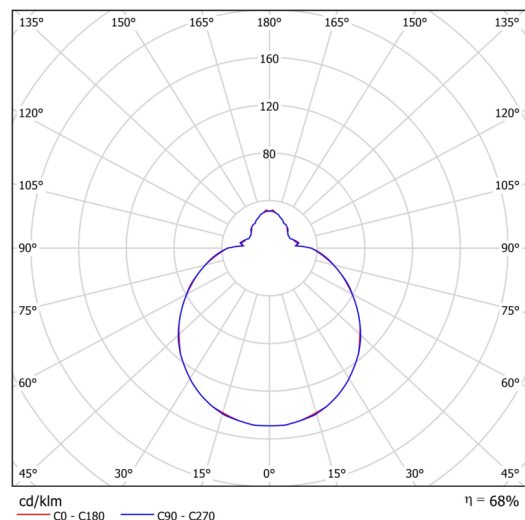

Eulum data for calculation programs are available at www.osmont.cz.

TECHNICAL SHEET



Logistic

EAN	8591728148911
Number of cartons	1 pcs

**The warranty for the batteries is valid for 12 months from the date of purchase.*

Installation dimensions:

