



## AURA 5

---

LED-1L16E500K86/082 HF 3/4K#

[WWW.OSMONT.CZ](http://WWW.OSMONT.CZ)

# AURA 5

Product code: AUR71121


Type: LED-1L16E500K86/082 HF 3/4K#

Short description of the luminaire: White surface-mounted changeable LED light with sensor with TRIPLEX OPAL glass shade



## Technical

|                              |                                |
|------------------------------|--------------------------------|
| Types of luminaires          | Sensor                         |
| Mounting type                | surface mounted                |
| Base material                | steel                          |
| Shade material               | three-layer glass TRIPLEX OPAL |
| Base color                   | white Ral9003                  |
| Shade color                  | white                          |
| Holding the shade            | folding system                 |
| Mounting location            | ceiling/wall                   |
| Width                        | 490 mm                         |
| Length                       | 490 mm                         |
| Height                       | 140 mm                         |
| Diameter                     | ø 490 mm                       |
| mounting holes (diameter)    | 4xø5mm                         |
| Installation wire (diameter) | 2xø16mm                        |
| Energy Class                 | D                              |
| Impact strength              | IK01                           |

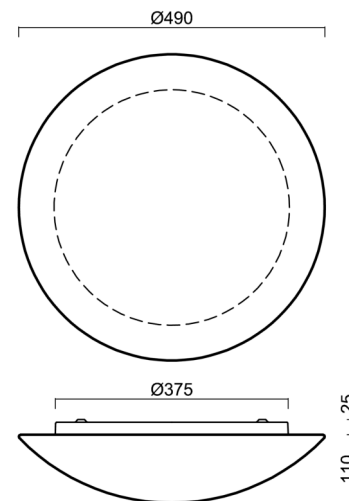


## Electric

|                                     |                     |
|-------------------------------------|---------------------|
| Power consumption                   | 24 W                |
| Ingress Protection                  | IP43                |
| Socket                              | LED modul           |
| Sensor                              | HF                  |
| terminal block                      | snap terminal block |
| Automatic circuit breaker type B10A | 37 pcs              |
| Automatic circuit breaker type B16A | 59 pcs              |
| Automatic circuit breaker type C10A | 37 pcs              |
| Automatic circuit breaker type C16A | 59 pcs              |

## Luminous

|                             |              |
|-----------------------------|--------------|
| Lum. flux of luminaire      | 2590/2700 lm |
| Lum. flux of light source   | 3750/3910 lm |
| Luminaire efficacy          | 107 lm/W     |
| Temperature                 | 3000/4000 K  |
| Rated life time LED L80/B10 | 100000 hours |
| CRI                         | Ra80         |
| MacAdam                     | 3            |
| Blue light hazard           | Risk group 0 |

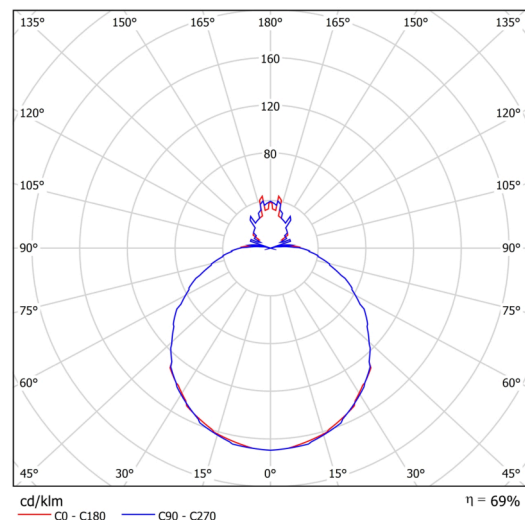

Eulum data for calculation programs are available at [www.osmont.cz](http://www.osmont.cz).

Logistic

|                   |                      |
|-------------------|----------------------|
| EAN               | 8591728071349        |
| Weight NTTO       | 4.7 Kg               |
| Weight BTTO       | 5.2 Kg               |
| Number of cartons | 1 pcs                |
| Package volume    | 0.036 m <sup>3</sup> |
| Package 1 width   | 0.515 m              |
| Package 1 length  | 0.495 m              |
| Package 1 height  | 0.14 m               |
| Warranty*         | 60 months            |

\*The warranty for the batteries is valid for 12 months from the date of purchase.

Installation dimensions:




## Additional assortment:

## Decorative collar

| Product code | Name     | Color                    | Description                    | Picture  | Drawing |
|--------------|----------|--------------------------|--------------------------------|--|---------|
| 30134        | K86/DL15 | brushed stainless steel  | the collar is held by the base |  |         |
| 30133        | K86/DL14 | polished stainless steel | the collar is held by the base |  |         |
| 30132        | K86/DL4  | white Ral9003            | the collar is held by the base |  |         |

## Lampshade

| Product code | Name | Color | Description | Picture  | Drawing |
|--------------|------|-------|-------------|--|---------|
| 20005        | 082  | white |             |  |         |