



AURA 9

LED-1L23ET1050K98/084 BT 27-65K##


WWW.OSMONT.CZ

AURA 9

Product code: AUR71186


Type: LED-1L23ET1050K98/084 BT 27-65K##

Short description of the luminaire: White color | surface-mounted LED light | Bluetooth Tunable White system | TRIPLEX OPAL glass shade with matt surface |



Technical

| | |
|------------------------------|--------------------------------|
| Types of luminaires | Tunable White |
| Mounting type | surface mounted |
| Base material | steel |
| Shade material | three-layer glass TRIPLEX OPAL |
| Base color | white Ral9003 |
| Shade color | white |
| Holding the shade | folding system |
| Mounting location | ceiling/wall |
| Width | 590 mm |
| Length | 590 mm |
| Height | 140 mm |
| Diameter | ø 590 mm |
| mounting holes (diameter) | 4xø5mm |
| Installation wire (diameter) | 2xø16mm |
| Energy Class | D |
| Impact strength | IK01 |
| Operating temperature | from -20°C to +30°C |

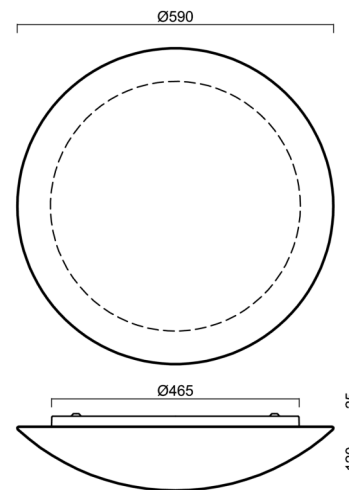


Electric

| | |
|-------------------------------------|---------------------|
| Power consumption | 52 W |
| Ingress Protection | IP43 |
| Socket | LED modul |
| terminal block | snap terminal block |
| Automatic circuit breaker type B10A | 14 pcs |
| Automatic circuit breaker type B16A | 23 pcs |

Luminous


| | |
|-----------------------------|--------------|
| Lum. flux of luminaire | 5620 lm |
| Lum. flux of light source | 8140 lm |
| Luminaire efficacy | 108 lm/W |
| Temperature | 2700-6500 K |
| Rated life time LED L80/B10 | 100000 hours |
| CRI | Ra80 |
| MacAdam | 3 |
| Blue light hazard | Risk group 0 |

Eulum data for calculation programs are available at www.osmont.cz.

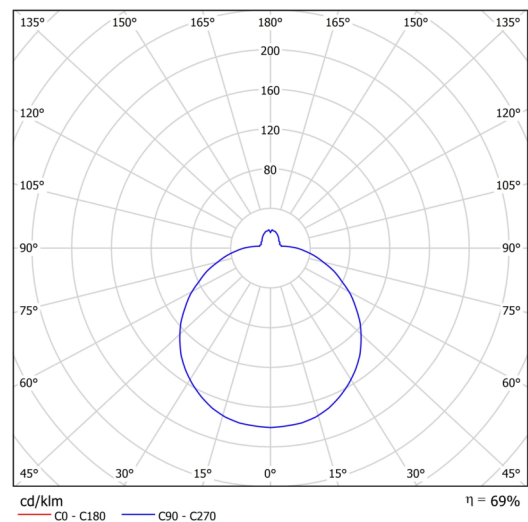

Additional assortment:

Lampshade

| Product code | Name | Color | Description | Picture | Drawing |
|--------------|------|-------|-------------|--|---------|
| 20050 | 084 | white | |  | |