



AURA V10


LED-1L15E500BTV14/014 DALI 4K#

WWW.OSMONT.CZ

AURA V10

Product code: 68603



Type: LED-1L15E500BTV14/014 DALI 4K#



Short description of the luminaire: recessed LED light DALI with TRIPLEX OPAL glass shade.

Technical

Types of luminaires	Dimmable
Mounting type	semi-recessed
Base material	steel
Shade material	three-layer glass TRIPLEX OPAL
Base color	white Ral9003
Shade color	white
Holding the shade	bayonet
Mounting location	ceiling/wall
Width	360 mm
Length	360 mm
Height	104 mm
Diameter	Ø 360 mm
mounting holes (diameter)	none
Installation wire (diameter)	2xØ16mm
Energy Class	D
Impact strength	IK01
Operating temperature	from -20°C to +30°C




Electric

Power consumption	19 W
Ingress Protection	IP44
Socket	LED modul
terminal block	snap terminal block
Automatic circuit breaker type B10A	31 pcs
Automatic circuit breaker type B16A	30 pcs
Automatic circuit breaker type C10A	32 pcs
Automatic circuit breaker type C16A	35 pcs

Luminous

Lum. flux of luminaire	2030 lm
Lum. flux of light source	3130 lm
Luminaire efficacy	106 lm/W
Temperature	4000 K
Rated life time LED L80/B10	100000 hours
CRI	Ra80
MacAdam	3
Blue light hazard	Risk group 0

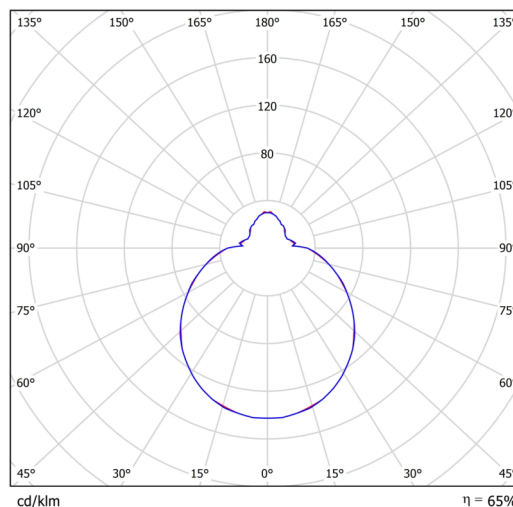

Eulum data for calculation programs are available at www.osmont.cz.


TECHNICAL SHEET

Logistic

EAN	8591728070366
Weight NTTO	2.6 Kg
Weight BTTO	2.9 Kg
Number of cartons	1 pcs
Package volume	0.025 ³ m
Package 1 width	0.37 m
Package 1 length	0.37 m
Package 1 height	0.18 m
Warranty*	60 months

*The warranty for the batteries is valid for 12 months from the date of purchase.

Installation dimensions:

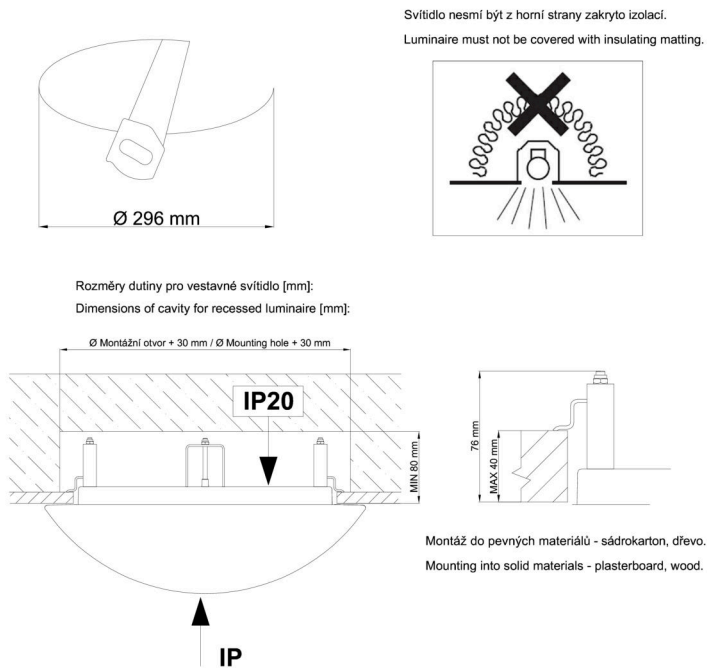

TECHNICAL SHEET

Additional assortment:

Lampshade

Product code	Name	Color	Description	Picture	Drawing
20055	014	white			