



CARINA V2

LED-1L20E700KNV96/426 DALI 3K##

WWW.OSMONT.CZ

CARINA V2

Product code: CAR67171



Type: LED-1L20E700KNV96/426 DALI 3K##

Short description of the luminaire: White semi-recessed LED light DALI with TRIPLEX OPAL glass shade.



Technical

Types of luminaires	Dimmable
Mounting type	semi-recessed
Base material	steel
Shade material	three-layer glass TRIPLEX OPAL
Base color	white Ral9003
Shade color	white
Holding the shade	folding system
Mounting location	ceiling/wall
Width	500 mm
Length	500 mm
Height	40 mm
Diameter	ø 500 mm
mounting holes (diameter)	none
Installation wire (diameter)	none
Energy Class	D
Impact strength	IK01
Operating temperature	from -20°C to +30°C

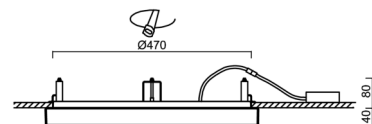


Electric

Power consumption	32 W
Ingress Protection	IP44
Socket	LED modul
terminal block	none
Automatic circuit breaker type B10A	14 pcs
Automatic circuit breaker type B16A	23 pcs
Automatic circuit breaker type C10A	23 pcs
Automatic circuit breaker type C16A	38 pcs

Luminous

Lum. flux of luminaire	3460 lm
Lum. flux of light source	5330 lm
Luminaire efficacy	108 lm/W
Temperature	3000 K
Rated life time LED L80/B10	100000 hours
CRI	Ra80
MacAdam	3
Blue light hazard	Risk group 0

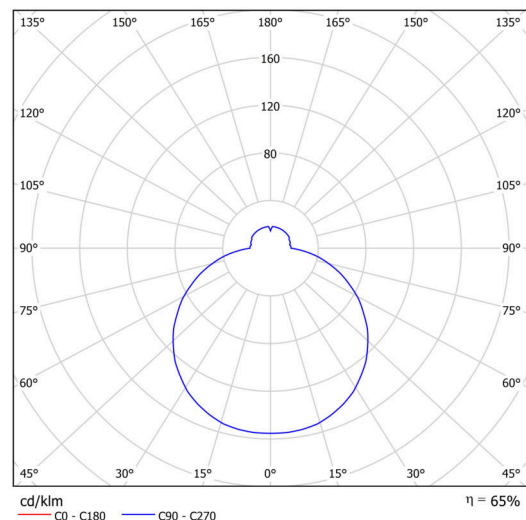

Eulum data for calculation programs are available at www.osmont.cz.

Logistic


EAN	8591728010638
Weight NTTO	4.9 Kg
Weight BTTO	5.4 Kg
Number of cartons	1 pcs
Package volume	0.037 m ³
Package 1 width	0.5 m
Package 1 length	0.53 m
Package 1 height	0.14 m
Warranty*	60 months

*The warranty for the batteries is valid for 12 months from the date of purchase.

Installation dimensions:



Svítlidlo nesmí být z horní strany zakryto izolací.
Luminaire must not be covered with insulating matting.



Rozměry dutiny pro vestavné svítidlo [mm]:
Dimensions of cavity for recessed luminaire [mm]:



Additional assortment:

Lampshade

Product code	Name	Color	Description	Picture	Drawing
20116	426	white		