



CORVUS V2

LED-1L20E1050KNV94/PC44 4K#


WWW.OSMONT.CZ

CORVUS V2

Product code: COR72504



Type: LED-1L20E1050KNV94/PC44 4K#

Short description of the luminaire: White semi-recessed changeable LED light ON/OFF and polycarbonate shade



Technical

Types of luminaires	Classic on/off
Mounting type	semi-recessed
Base material	steel
Shade material	opal polycarbonate
Base color	white Ral9003
Shade color	white
Holding the shade	folding system
Mounting location	ceiling/wall
Width	495 mm
Length	495 mm
Height	40 mm
Diameter	ø 495 mm
mounting holes (diameter)	none
Installation wire (diameter)	none
Energy Class	D
Impact strength	IK10
Operating temperature	from -20°C to +30°C

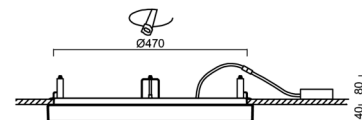


Electric

Power consumption	48 W
Ingress Protection	IP44
Socket	LED modul
terminal block	none

Luminous

Lum. flux of luminaire	5650 lm
Lum. flux of light source	8070 lm
Luminaire efficacy	117 lm/W
Temperature	4000 K
Rated life time LED L80/B10	100000 hours
CRI	Ra80
MacAdam	3
Blue light hazard	Risk group 0

Eulum data for calculation programs are available at www.osmont.cz.

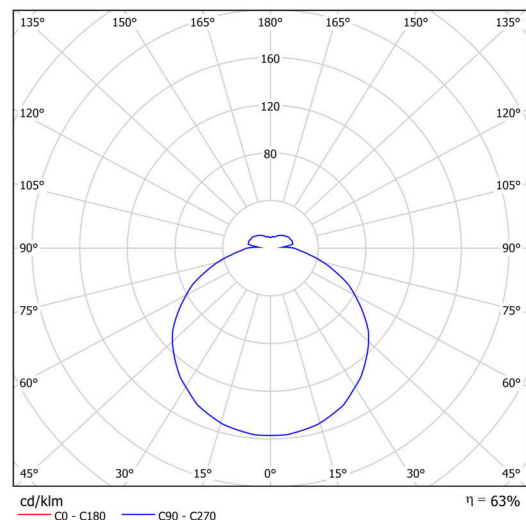


Logistic


EAN	8591728072650
Weight NTTO	2.7 Kg
Weight BTTO	2.9 Kg
Number of cartons	1 pcs
Package volume	0.058 m ³
Package 1 width	0.52 m
Package 1 length	0.52 m
Package 1 height	0.215 m
Warranty*	60 months

*The warranty for the batteries is valid for 12 months from the date of purchase.


Installation dimensions:



Svítlidlo nesmí být z horní strany zakryto izolací.
Luminaire must not be covered with insulating matting.



Rozměry dutiny pro vestavné svítidlo [mm]:
Dimensions of cavity for recessed luminaire [mm]:

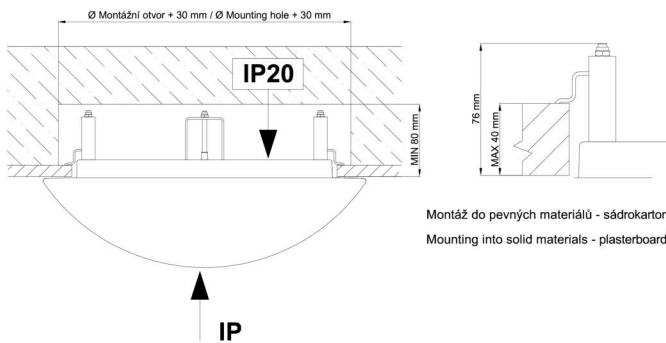

Montáž do pevných materiálů - sádkarton, dřevo.
Mounting into solid materials - plasterboard, wood.

Additional assortment:

Lampshade

Product code	Name	Color	Description	Picture	Drawing
20614	PC44	white		