



DELIA 3

LED-1L20EMP1050KN94/PM24 NK3HST 3/35/4K##


WWW.OSMONT.CZ

DELIA 3

Product code: DEL71521

Type: LED-1L20EMP1050KN94/PM24 NK3HST 3/35/4K##

Short description of the luminaire: White colour | ceiling or wall LED light with emergency backup combined (with Self-test) | multipower driver | opal polycarbonate shade (PC)|



Technical data



Types of luminaires	Emergency combined SELFTEST
Mounting type	surface mounted
Base material	steel
Shade material	opal polymethyl methacrylate
Base color	white Ral9003
Shade color	white
Holding the shade	folding system
Mounting location	ceiling/wall
Width	500 mm
Length	500 mm
Height	85 mm
Diameter	Ø 500 mm
mounting holes (diameter)	3xØ5mm
Cable entrance	2xØ16mm
Energy Class	D
Impact strength	IK04
Operating temperature	from +5°C to +30°C

Electrical data

Power consumption	48 W
Ingress Protection	IP54
Socket	LED modul
Battery type	LiFePO4
Emergency time	3 hours
SELFTEST	yes
terminal block	snap terminal block
Automatic circuit breaker type B10A	13 pcs
Automatic circuit breaker type B16A	22 pcs
Automatic circuit breaker type C10A	18 pcs
Automatic circuit breaker type C16A	29 pcs
Number of LED drivers	1

Luminous data

Lum. flux of luminaire	5110/5330 lm
Lum. flux of light source	7740/8070 lm
Lum. flux of light source in emergency mode	200 lm
Luminaire efficacy	106 lm/W
Chromaticity temperature	3000/3500/4000 K
Rated life time LED L80/B10	100000 hours

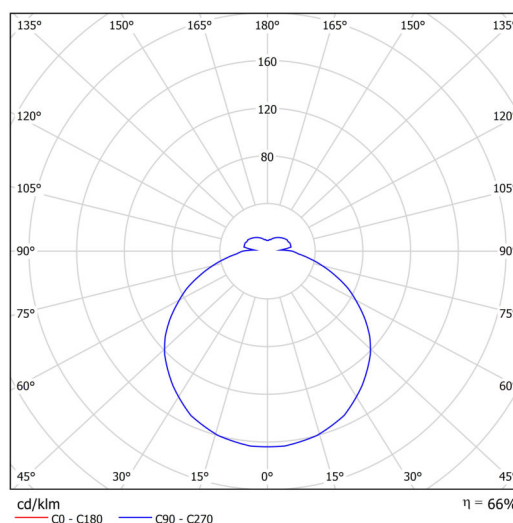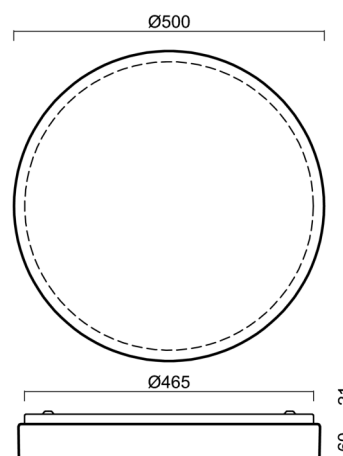

TECHNICAL SHEET



CRI	Ra80
MacAdam	3
Blue light hazard	Risk group 0

*Eulum data for calculation programs are available at
www.osmont.cz.*

Multipower

Possibility of output adjustment by the user (DIP switch on the current source).


I [mA]	1050	1000	950	900	850	800	750	700
[%]	100	95	90	86	81	76	71	67

Logistical data

EAN	8591728242282
Weight NTTO	3.06 Kg
Weight BTTO	3.5 Kg
Number of cartons	1 pcs
Package volume	0.023 m ³
Package 1 width	0.5 m
Package 1 length	0.5 m
Package 1 height	0.09 m
Warranty*	60 months



**The warranty for the batteries is valid for 36 months from the date of purchase.*

Installation dimensions:

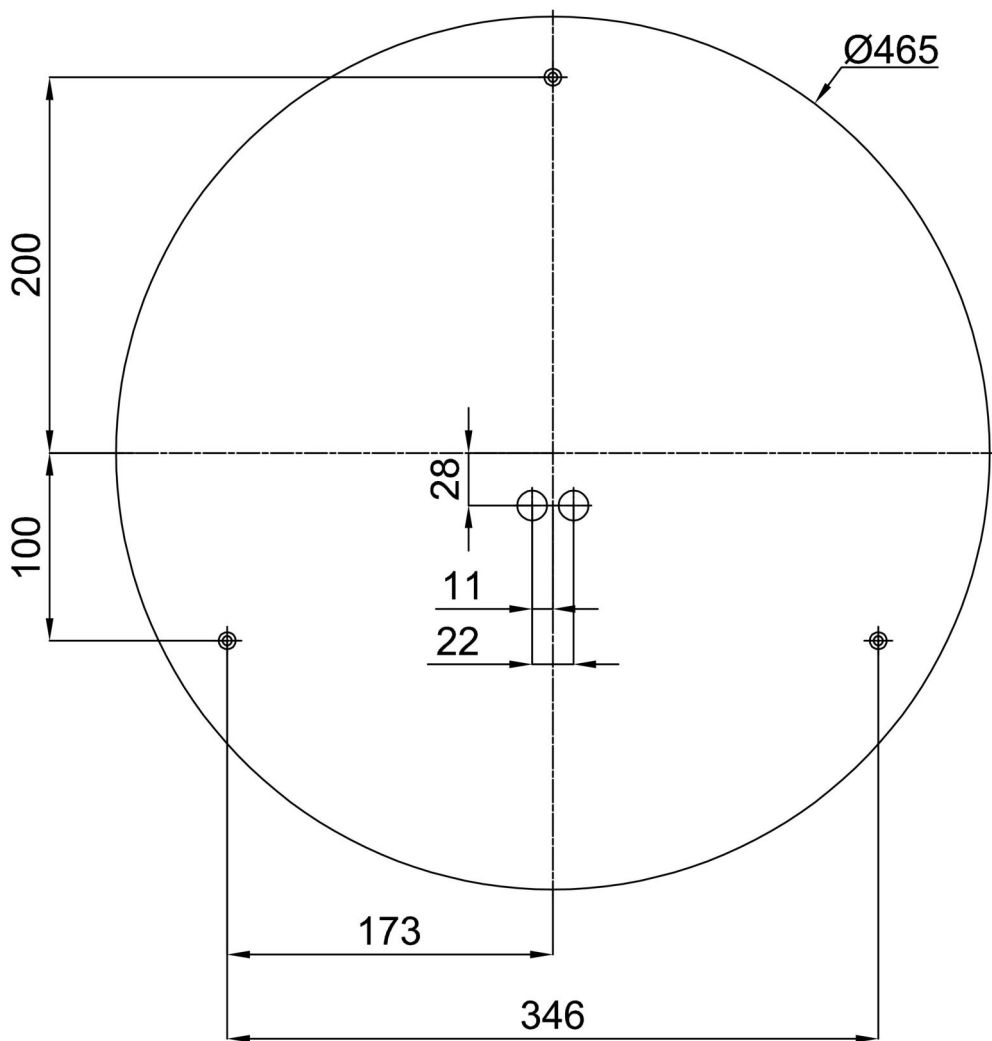

Additional assortment:

Base for surface mounting

Product code	Name	Color	Picture	Drawing
33503	KN9,K9/BP 2-1 B	white Ral9003		

Lampshade

Product code	Name	Color	Picture	Drawing
20523	PM24	white		