



## DELIA 4

---

LED-6L51EMP700KN10/PM25/NK1W 4K##

[WWW.OSMONT.CZ](http://WWW.OSMONT.CZ)

# DELIA 4

Product code: DEL58773


Type: LED-6L51EMP700KN10/PM25/NK1W 4K##

Short description of the luminaire: White surface-mounted LED light with emergency unit combined and PMMA shade



## Technical

|                              |                              |
|------------------------------|------------------------------|
| Types of luminaires          | Emergency combined           |
| Mounting type                | surface mounted              |
| Base material                | steel                        |
| Shade material               | opal polymethyl methacrylate |
| Base color                   | white Ra9003                 |
| Shade color                  | white                        |
| Holding the shade            | folding system               |
| Mounting location            | ceiling/wall                 |
| Width                        | 650 mm                       |
| Length                       | 650 mm                       |
| Height                       | 80 mm                        |
| Diameter                     | ø 650 mm                     |
| mounting holes (diameter)    | 3xø5mm                       |
| Installation wire (diameter) | 2xø16mm                      |
| Energy Class                 | D                            |
| Impact strength              | IK04                         |
| Operating temperature        | from 0°C to +30°C            |

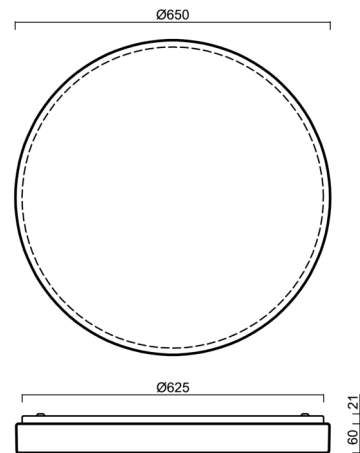


## Electric

|                                     |                     |
|-------------------------------------|---------------------|
| Power consumption                   | 65 W                |
| Ingress Protection                  | IP54                |
| Socket                              | LED modul           |
| Battery type                        | NiCd                |
| Emergency time                      | 3 hours             |
| terminal block                      | snap terminal block |
| Automatic circuit breaker type B10A | 15 pcs              |
| Automatic circuit breaker type B16A | 23 pcs              |
| Automatic circuit breaker type C10A | 16 pcs              |
| Automatic circuit breaker type C16A | 26 pcs              |

## Luminous

|   |              |
|---|--------------|
| Lum. flux of luminaire                      | 7470 lm      |
| Lum. flux of light source                   | 10980 lm     |
| Lum. flux of light source in emergency mode | 150 lm       |
| Luminaire efficacy                          | 114 lm/W     |
| Temperature                                 | 4000 K       |
| Rated life time LED L80/B10                 | 100000 hours |
| CRI   | Ra80         |
| MacAdam                                     | 3            |
| Blue light hazard                           | Risk group 0 |

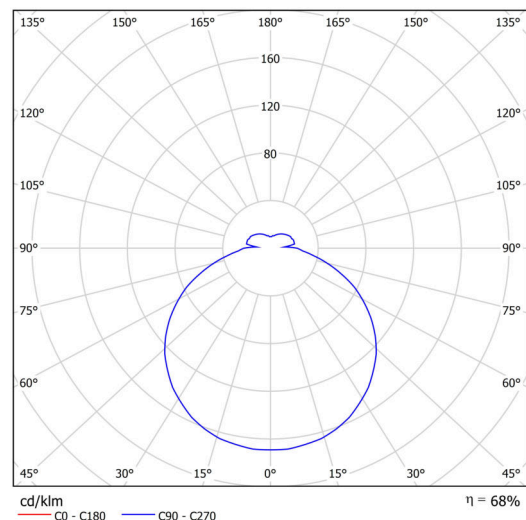

# TECHNICAL SHEET



Full data for calculation programs are available at [www.osmont.cz](http://www.osmont.cz).

## Multipower

Possibility of output adjustment by the user (DIP switch on the current source).


|        |     |     |     |     |  |
|--------|-----|-----|-----|-----|--|
| I [mA] | 700 | 600 | 500 | 400 |  |
| [%]    | 100 | 86  | 71  | 57  |  |

## Logistic

|                   |                     |
|-------------------|---------------------|
| EAN               | 8591728074272       |
| Weight NTTO       | 5.8 Kg              |
| Weight BTTO       | 7.2 Kg              |
| Number of cartons | 1 pcs               |
| Package volume    | 0.08 m <sup>3</sup> |
| Package 1 width   | 0.68 m              |
| Package 1 length  | 0.69 m              |
| Package 1 height  | 0.17 m              |
| Warranty*         | 60 months           |


\*The warranty for the batteries is valid for 12 months from the date of purchase.

## Installation dimensions:

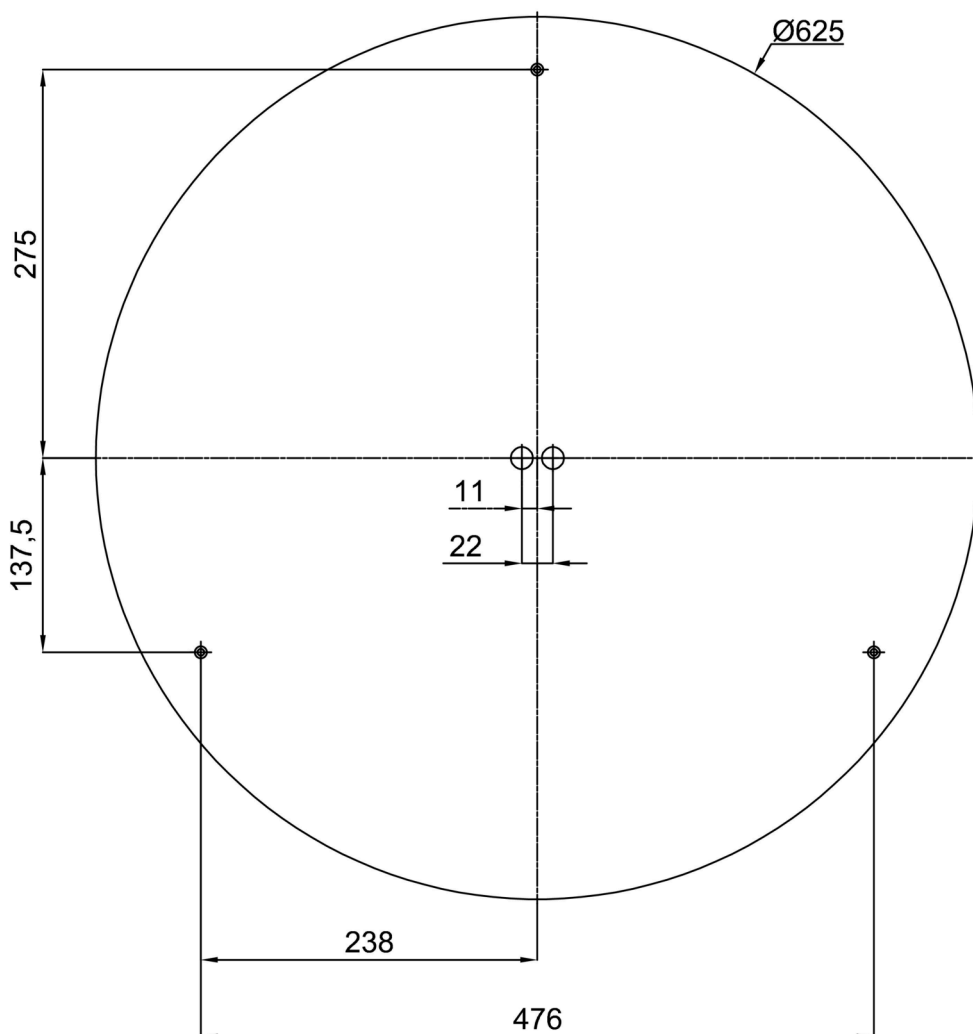

## Additional assortment:

## Lampshade

| Product code | Name | Color | Description | Picture  | Drawing |
|--------------|------|-------|-------------|--|---------|
| 20535        | PM25 | white |             |  |         |