



## DELIA 5

---

LED-6L55ET1050KN11/PM26 BT 27-65K##

[WWW.OSMONT.CZ](http://WWW.OSMONT.CZ)

# DELIA 5

Product code: DEL63168


Type: LED-6L55ET1050KN11/PM26 BT 27-65K##

Short description of the luminaire: White surface-mounted LED light Tunable White and PMMA shade.



## Technical

Types of luminaires	Tunable White
Mounting type	surface mounted
Base material	steel
Shade material	opal polymethyl methacrylate
Base color	white Ra9003
Shade color	white
Holding the shade	folding system
Mounting location	ceiling/wall
Width	900 mm
Length	900 mm
Height	85 mm
Diameter	ø 900 mm
mounting holes (diameter)	3xø5mm
Installation wire (diameter)	2xø16mm
Energy Class	D
Impact strength	IK04
Operating temperature	from -20°C to +30°C

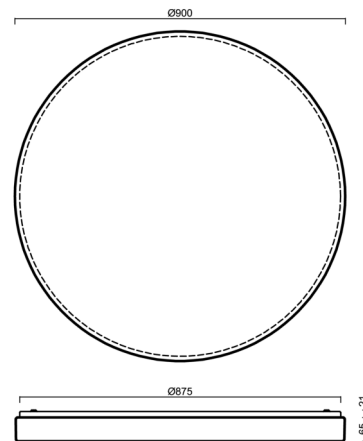


## Electric

Power consumption	155 W
Ingress Protection	IP54
Socket	LED modul
terminal block	snap terminal block
Automatic circuit breaker type B10A	4 pcs
Automatic circuit breaker type B16A	7 pcs

## Luminous

Lum. flux of luminaire	17210 lm
Lum. flux of light source	24590 lm
Luminaire efficacy	111 lm/W
Temperature	2700-6500 K
Rated life time LED L80/B10	100000 hours
CRI	Ra80
MacAdam	3
Blue light hazard	Risk group 0

Eulum data for calculation programs are available at [www.osmont.cz](http://www.osmont.cz).

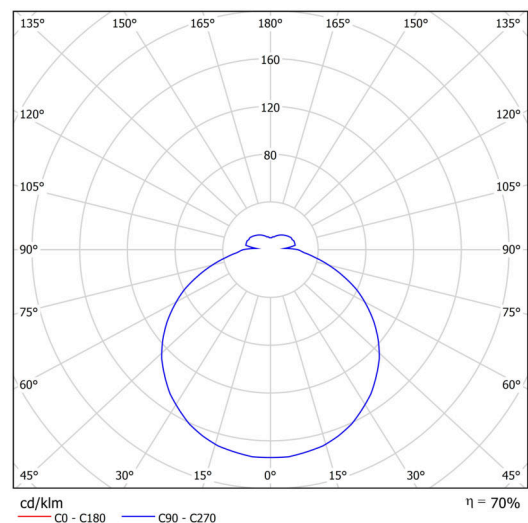


Logistic

EAN	8591728074494
Weight NTTO	10 Kg
Weight BTTO	12.7 Kg
Number of cartons	1 pcs
Package volume	0.205 m <sup>3</sup>
Package 1 width	0.94 m
Package 1 length	0.95 m
Package 1 height	0.23 m
Warranty*	60 months

\*The warranty for the batteries is valid for 12 months from the date of purchase.

Installation dimensions:

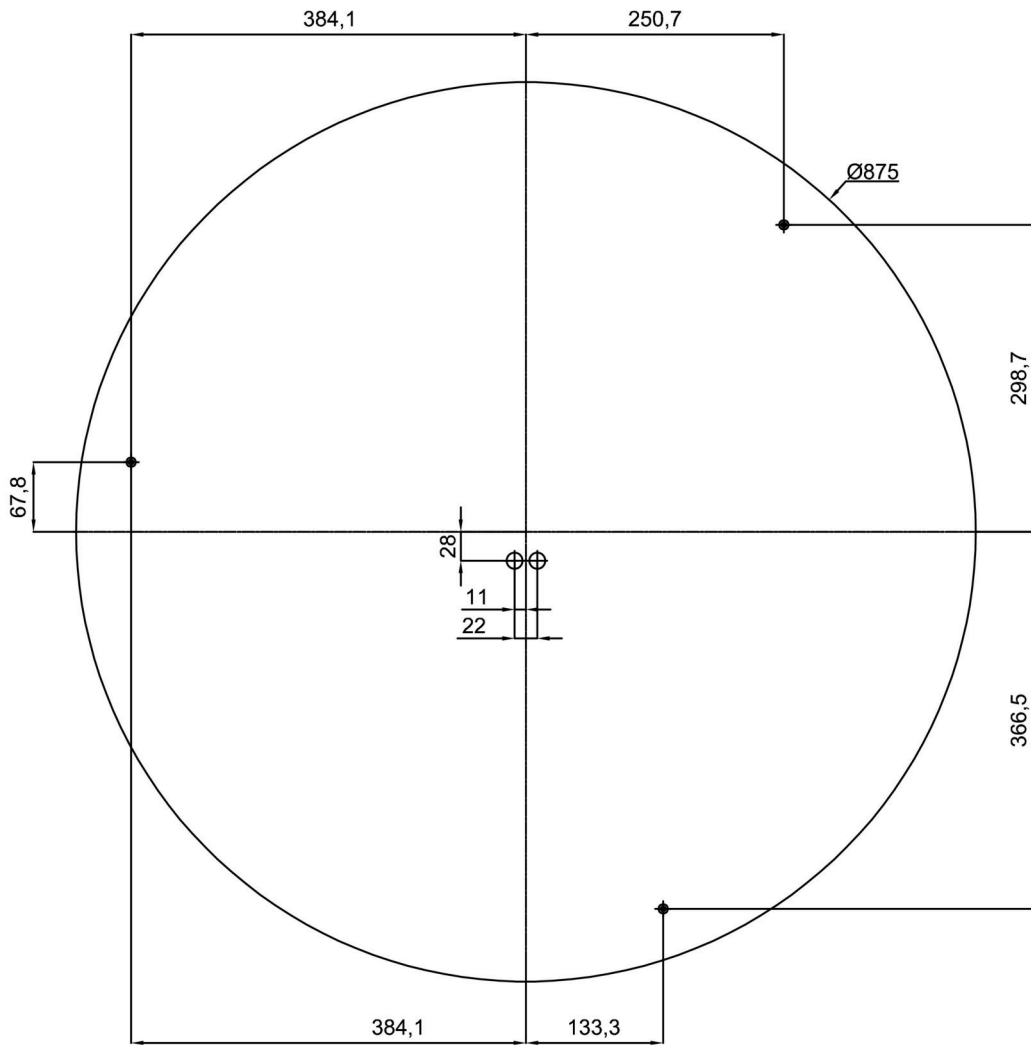

## Additional assortment:

## Lampshade

Product code	Name	Color	Description	Picture	Drawing
20536	PM26	white		