



DELIA C5

LED-9L52E1050KN11/PM26C DALI 4K##


WWW.OSMONT.CZ

DELIA C5

Product code: DEL69595


Type: LED-9L52E1050KN11/PM26C DALI 4K##

Short description of the luminaire: White surface-mounted LED light DALI and PMMA shade.



Technical

Types of luminaires	Dimmable
Mounting type	surface mounted
Base material	steel
Shade material	opal polymethyl methacrylate
Base color	white Ral9003
Shade color	white - black
Holding the shade	folding system
Mounting location	ceiling/wall
Width	900 mm
Length	900 mm
Height	85 mm
Diameter	ø 900 mm
mounting holes (diameter)	3xø5mm
Installation wire (diameter)	2xø16mm
Energy Class	D
Impact strength	IK04
Operating temperature	from -20°C to +30°C

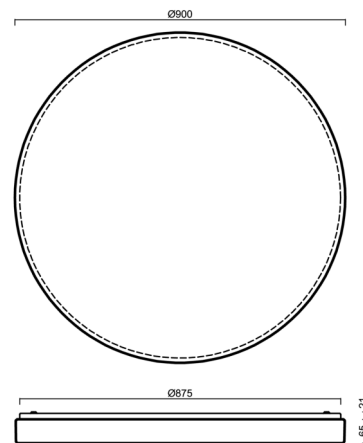

Electric

Power consumption	150 W
Ingress Protection	IP54
Socket	LED modul
terminal block	snap terminal block
Automatic circuit breaker type B10A	4 pcs
Automatic circuit breaker type B16A	7 pcs
Automatic circuit breaker type C10A	7 pcs
Automatic circuit breaker type C16A	11 pcs

Luminous

Lum. flux of luminaire	13050 lm
Lum. flux of light source	23720 lm
Luminaire efficacy	87 lm/W
Temperature	4000 K
Rated life time LED L80/B10	100000 hours
CRI	Ra80
MacAdam	3
Blue light hazard	Risk group 0




Eulum data for calculation programs are available at www.osmont.cz.

Logistic

EAN	8591728078843
Weight NTTO	10.1 Kg
Weight BTTO	12.8 Kg
Number of cartons	1 pcs
Package volume	0.205 m ³
Package 1 width	0.94 m
Package 1 length	0.95 m
Package 1 height	0.23 m
Warranty*	60 months

*The warranty for the batteries is valid for 12 months from the date of purchase.

Installation dimensions:

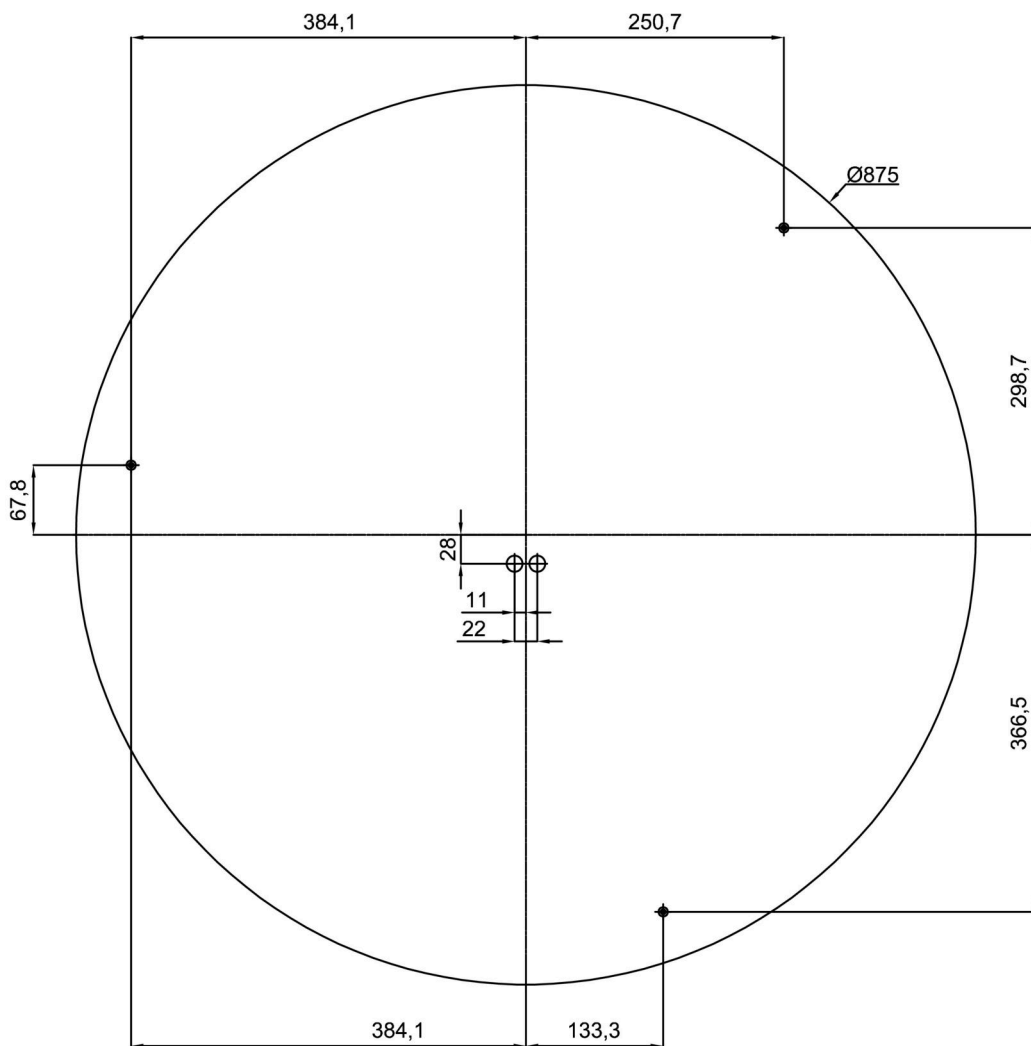

Additional assortment:

Lampshade

Product code	Name	Color	Description	Picture	Drawing
20574	PM26C	white - black		