



DELIA V1

LED-1L14ET700KNV62/PM22 DALI 27-65K#

WWW.OSMONT.CZ

DELIA V1

Product code: DEL63116


Type: LED-1L14ET700KNV62/PM22 DALI 27-65K#

Short description of the luminaire: White semi-recessed LED light with Tunable White system and PMMA shade.



Technical

Types of luminaires	Tunable White
Mounting type	semi-recessed
Base material	steel
Shade material	opal polymethyl methacrylate
Base color	white Ra9003
Shade color	white
Holding the shade	folding system
Mounting location	ceiling/wall
Width	300 mm
Length	300 mm
Height	60 mm
Diameter	ø 300 mm
mounting holes (diameter)	none
Installation wire (diameter)	2xØ16mm
Energy Class	D
Impact strength	IK04
Operating temperature	from -20°C to +30°C




Electric

Power consumption	18 W
Ingress Protection	IP44
Socket	LED modul
terminal block	snap terminal block
Automatic circuit breaker type B10A	22 pcs
Automatic circuit breaker type B16A	36 pcs

Luminous

Lum. flux of luminaire	1950 lm
Lum. flux of light source	2710 lm
Luminaire efficacy	108 lm/W
Temperature	2700-6500 K
Rated life time LED L80/B10	100000 hours
CRI	Ra80
MacAdam	3
Blue light hazard	Risk group 0

Eulum data for calculation programs are available at www.osmont.cz.

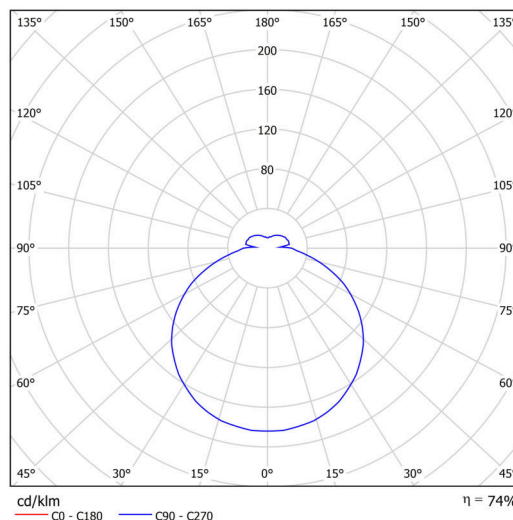


Logistic


EAN	8591728074388
Weight NTTO	1.35 Kg
Weight BTTO	1.55 Kg
Number of cartons	1 pcs
Package volume	0.017 m ³
Package 1 width	0.31 m
Package 1 length	0.31 m
Package 1 height	0.18 m
Warranty*	60 months

*The warranty for the batteries is valid for 12 months from the date of purchase.

Installation dimensions:



Svítlidlo nesmí být z horní strany zakryto izolací.
Luminaire must not be covered with insulating matting.



Rozměry dutiny pro vestavné svítidlo [mm]:
Dimensions of cavity for recessed luminaire [mm]:



Montáž do pevných materiálů - sádkartón, dřevo.
Mounting into solid materials - plasterboard, wood.

Additional assortment:

Lampshade

Product code	Name	Color	Description	Picture	Drawing
20519	PM22	white		