



## DELIA V1

---

LED-1L14E500KNV62/PC22/NK1W HF 3K#

[WWW.OSMONT.CZ](http://WWW.OSMONT.CZ)

# DELIA V1

Product code: DEL65077



Type: LED-1L14E500KNV62/PC22/NK1W HF 3K#

Short description of the luminaire: White semi-recessed LED light with emergency unit combined with sensor and polycarbonate shade.



## Technical

|                              |                             |
|------------------------------|-----------------------------|
| Types of luminaires          | Emergency combined + sensor |
| Mounting type                | semi-recessed               |
| Base material                | steel                       |
| Shade material               | opal polycarbonate          |
| Base color                   | white Ral9003               |
| Shade color                  | white                       |
| Holding the shade            | folding system              |
| Mounting location            | ceiling/wall                |
| Width                        | 300 mm                      |
| Length                       | 300 mm                      |
| Height                       | 60 mm                       |
| Diameter                     | ø 300 mm                    |
| mounting holes (diameter)    | none                        |
| Installation wire (diameter) | 2xØ16mm                     |
| Energy Class                 | D                           |
| Impact strength              | IK10                        |
| Operating temperature        | from -20°C to +30°C         |

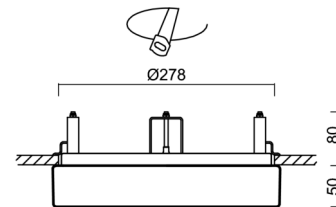


## Electric

|                                     |                     |
|-------------------------------------|---------------------|
| Power consumption                   | 13 W                |
| Ingress Protection                  | IP44                |
| Socket                              | LED modul           |
| Sensor                              | HF                  |
| Battery type                        | NiCd                |
| Emergency time                      | 3 hours             |
| terminal block                      | snap terminal block |
| Automatic circuit breaker type B10A | 23 pcs              |
| Automatic circuit breaker type B16A | 36 pcs              |
| Automatic circuit breaker type C10A | 40 pcs              |
| Automatic circuit breaker type C16A | 64 pcs              |

## Luminous

|   |              |
|---|--------------|
| Lum. flux of luminaire                      | 1480 lm      |
| Lum. flux of light source                   | 2000 lm      |
| Lum. flux of light source in emergency mode | 150 lm       |
| Luminaire efficacy                          | 113 lm/W     |
| Temperature                                 | 3000 K       |
| Rated life time LED L80/B10                 | 100000 hours |
| CRI   | Ra80         |
| MacAdam                                     | 3            |

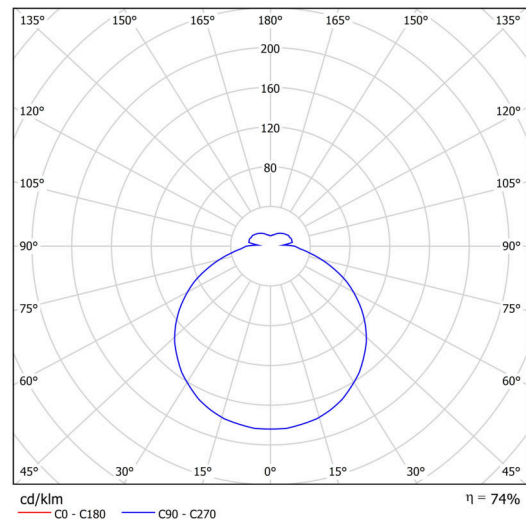

# TECHNICAL SHEET



|                   |              |
|-------------------|--------------|
| Blue light hazard | Risk group 0 |
|-------------------|--------------|


Eulum data for calculation programs are available at [www.osmont.cz](http://www.osmont.cz).

## Logistic


|                   |                      |
|-------------------|----------------------|
| EAN               | 8591728074616        |
| Weight NTTO       | 1.75 Kg              |
| Weight BTTO       | 1.95 Kg              |
| Number of cartons | 1 pcs                |
| Package volume    | 0.017 m <sup>3</sup> |
| Package 1 width   | 0.31 m               |
| Package 1 length  | 0.31 m               |
| Package 1 height  | 0.18 m               |
| Warranty*         | 60 months            |

\*The warranty for the batteries is valid for 12 months from the date of purchase.


## Installation dimensions:



Svítlidlo nesmí být z horní strany zakryto izolací.  
Luminaire must not be covered with insulating matting.




Rozměry dutiny pro vestavné svítidlo [mm]:  
Dimensions of cavity for recessed luminaire [mm]:

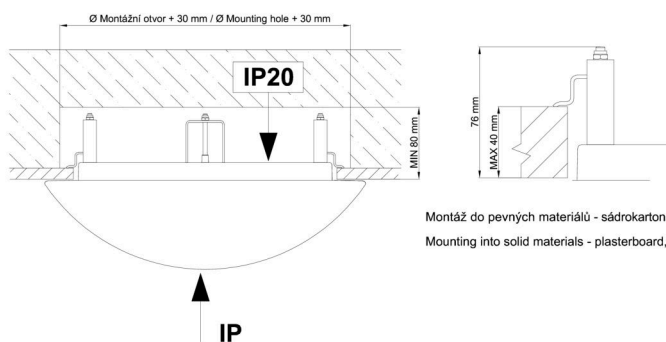

Montáž do pevných materiálů - sádkartón, dřevo.  
Mounting into solid materials - plasterboard, wood.

## Additional assortment:

## Lampshade

| Product code | Name | Color | Description | Picture  | Drawing |
|--------------|------|-------|-------------|--|---------|
| 20520        | PC22 | white |             |  |         |