



ELSA V4

LED-1L16ET500BTV15/029 BT 27-65K#


WWW.OSMONT.CZ

ELSA V4

Product code: ELS63147



Type: LED-1L16ET500BTV15/029 BT 27-65K#

Short description of the luminaire: White semi-recessed LED light Tunable White with TRIPLEX OPAL glass shade.



Technical

Types of luminaires	Tunable White
Mounting type	semi-recessed
Base material	steel
Shade material	three-layer glass TRIPLEX OPAL
Base color	white Ral9003
Shade color	white
Holding the shade	bayonet
Mounting location	ceiling/wall
Width	420 mm
Length	420 mm
Height	69 mm
Diameter	ø 420 mm
mounting holes (diameter)	none
Installation wire (diameter)	2xØ16mm
Energy Class	D
Impact strength	IK01
Operating temperature	from -20°C to +30°C

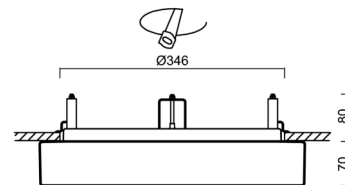


Electric

Power consumption	23 W
Ingress Protection	IP44
Socket	LED modul
terminal block	snap terminal block
Automatic circuit breaker type B10A	22 pcs
Automatic circuit breaker type B16A	36 pcs

Luminous

Lum. flux of luminaire	2480 lm
Lum. flux of light source	3700 lm
Luminaire efficacy	107 lm/W
Temperature	2700-6500 K
Rated life time LED L80/B10	100000 hours
CRI	Ra80
MacAdam	3
Blue light hazard	Risk group 0

Elum data for calculation programs are available at www.osmont.cz.

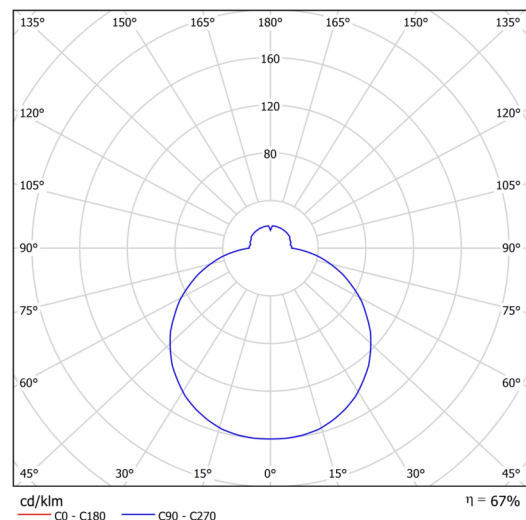


Logistic


EAN	8591728095826
Weight NTTO	4.2 Kg
Weight BTTO	4.6 Kg
Number of cartons	1 pcs
Package volume	0.033 m ³
Package 1 width	0.43 m
Package 1 length	0.43 m
Package 1 height	0.18 m
Warranty*	60 months

*The warranty for the batteries is valid for 12 months from the date of purchase.


Installation dimensions:



Svítlidlo nesmí být z horní strany zakryto izolací.
Luminaire must not be covered with insulating matting.



Rozměry dutiny pro vestavné svítidlo [mm]:
Dimensions of cavity for recessed luminaire [mm]:

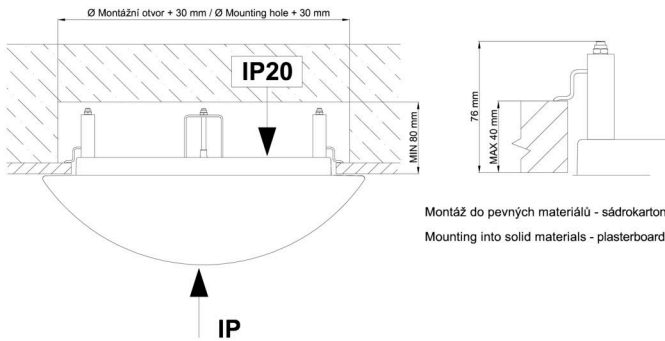

Montáž do pevných materiálů - sádkarton, dřevo.
Mounting into solid materials - plasterboard, wood.

Additional assortment:

Lampshade

Product code	Name	Color	Description	Picture	Drawing
20083	029	white		