



## ELSA V5

---

LED-1L19E500BTv16/626 DALI 4K##


[WWW.OSMONT.CZ](http://WWW.OSMONT.CZ)

# ELSA V5

Product code: ELS68645



Type: LED-1L19E500BTV16/626 DALI 4K##

Short description of the luminaire: White semi-recessed LED light DALI with TRIPLEX OPAL glass shade.



## Technical

Types of luminaires	Dimmable
Mounting type	semi-recessed
Base material	steel
Shade material	three-layer glass TRIPLEX OPAL
Base color	white Ral9003
Shade color	white
Holding the shade	bayonet
Mounting location	ceiling/wall
Width	500 mm
Length	500 mm
Height	71 mm
Diameter	ø 500 mm
mounting holes (diameter)	none
Installation wire (diameter)	2xØ16mm
Energy Class	D
Impact strength	IK01
Operating temperature	from -20°C to +30°C




## Electric

Power consumption	26 W
Ingress Protection	IP44
Socket	LED modul
terminal block	snap terminal block
Automatic circuit breaker type B10A	18 pcs
Automatic circuit breaker type B16A	28 pcs
Automatic circuit breaker type C10A	30 pcs
Automatic circuit breaker type C16A	46 pcs

## Luminous

Lum. flux of luminaire	2730 lm
Lum. flux of light source	4200 lm
Luminaire efficacy	105 lm/W
Temperature	4000 K
Rated life time LED L80/B10	100000 hours
CRI	Ra80
MacAdam	3
Blue light hazard	Risk group 0

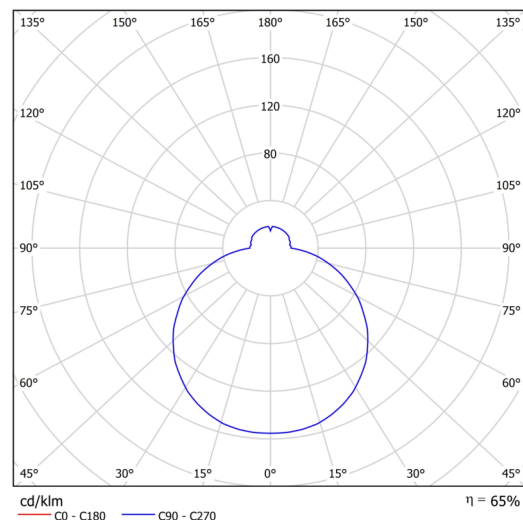


Eulum data for calculation programs are available at [www.osmont.cz](http://www.osmont.cz).

Logistic


EAN	8591728097110
Weight NTTO	7.1 Kg
Weight BTTO	7.6 Kg
Number of cartons	1 pcs
Package volume	0.05 m <sup>3</sup>
Package 1 width	0.5 m
Package 1 length	0.5 m
Package 1 height	0.2 m
Warranty*	60 months

\*The warranty for the batteries is valid for 12 months from the date of purchase.


Installation dimensions:



Svítlidlo nesmí být z horní strany zakryto izolací.  
Luminaire must not be covered with insulating matting.



Rozměry dutiny pro vestavné svítidlo [mm]:  
Dimensions of cavity for recessed luminaire [mm]:

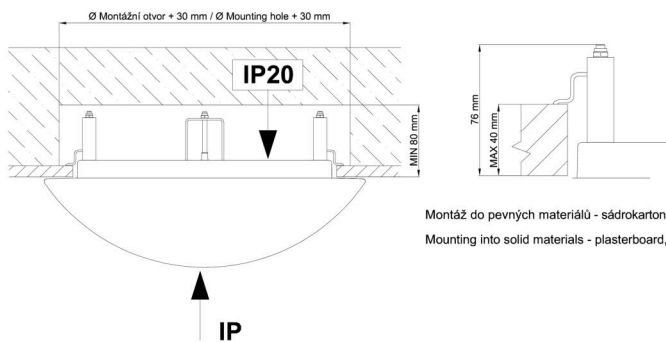

Additional assortment:

## Lampshade

Product code	Name	Color	Description	Picture	Drawing
20103	626	white		