



ERIS CV4

LED-1L23EMP700KV910/414C 3K##

WWW.OSMONT.CZ

ERIS CV4

Product code: ERI67161

Type: LED-1L23EMP700KV910/414C 3K##

Short description of the luminaire: White semi-recessed LED light ON/OFF with TRIPLEX OPAL glass shade with black decorative stripe.



Technical




| | |
|------------------------------|--------------------------------|
| Types of luminaires | Classic on/off |
| Mounting type | semi-recessed |
| Base material | steel |
| Shade material | three-layer glass TRIPLEX OPAL |
| Base color | white Ral9003 |
| Shade color | white - black |
| Holding the shade | folding system |
| Mounting location | ceiling/wall |
| Width | 540 mm |
| Length | 540 mm |
| Height | 120 mm |
| Diameter | Ø 540 mm |
| mounting holes (diameter) | none |
| Installation wire (diameter) | 2xØ16mm |
| Energy Class | D |
| Impact strength | IK01 |
| Operating temperature | from -20°C to +30°C |

Electric

| | |
|-------------------------------------|---------------------|
| Power consumption | 35 W |
| Ingress Protection | IP44 |
| Socket | LED modul |
| terminal block | snap terminal block |
| Automatic circuit breaker type B10A | 37 pcs |
| Automatic circuit breaker type B16A | 59 pcs |
| Automatic circuit breaker type C10A | 37 pcs |
| Automatic circuit breaker type C16A | 59 pcs |

Luminous

| | |
|-----------------------------|--------------|
| Lum. flux of luminaire | 2810 lm |
| Lum. flux of light source | 5610 lm |
| Luminaire efficacy | 80 lm/W |
| Temperature | 3000 K |
| Rated life time LED L80/B10 | 100000 hours |
| CRI | Ra80 |
| MacAdam | 3 |
| Blue light hazard | Risk group 0 |

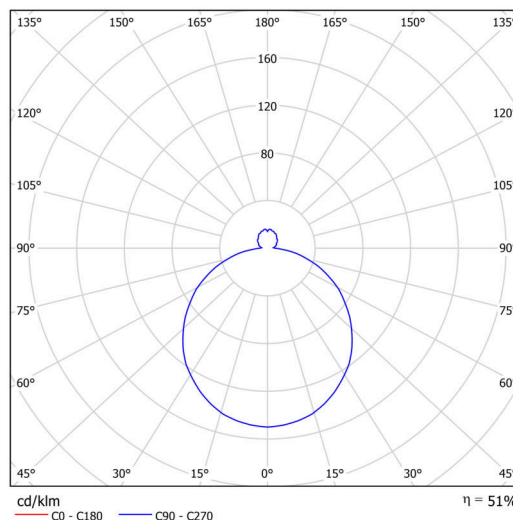

Eulum data for calculation programs are available at www.osmont.cz.

TECHNICAL SHEET



Multipower

Possibility of output adjustment by the user (DIP switch on the current source).


| | | | | | |
|--------|-----|-----|-----|-----|--|
| I [mA] | 700 | 600 | 500 | 400 | |
| [%] | 100 | 86 | 71 | 57 | |

Logistic

| | |
|-------------------|----------------------|
| EAN | 8591728099923 |
| Weight NTTO | 7.15 Kg |
| Weight BTTO | 7.85 Kg |
| Number of cartons | 1 pcs |
| Package volume | 0.086 m ³ |
| Package 1 width | 0.6 m |
| Package 1 length | 0.6 m |
| Package 1 height | 0.24 m |
| Warranty* | 60 months |


*The warranty for the batteries is valid for 12 months from the date of purchase.

Installation dimensions:

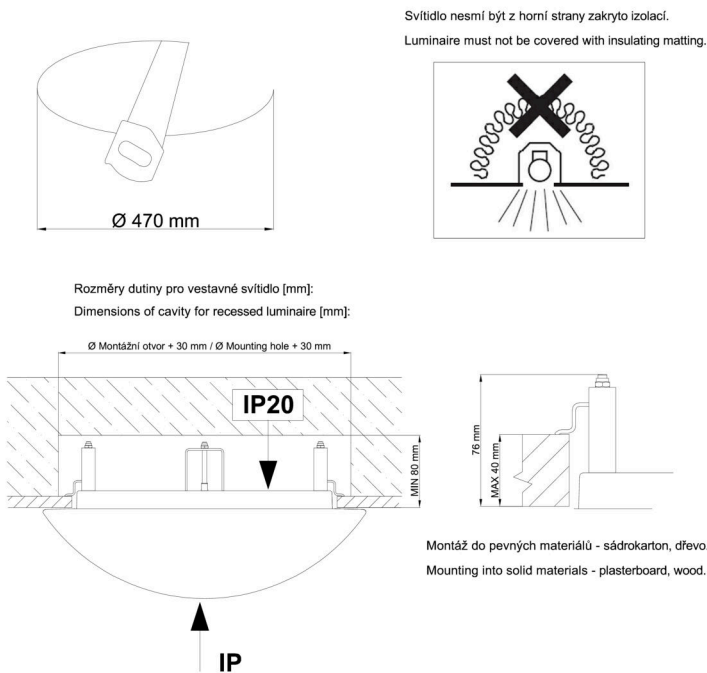

Additional assortment:

Lampshade

| Product code | Name | Color | Description | Picture | Drawing |
|--------------|------|---------------|-------------|--|---------|
| 20133 | 414C | white - black | |  | |