



IRIDA 3

LED-1L15E350BD14/PC64 HF CORR 4K#

WWW.OSMONT.CZ

IRIDA 3

Product code: IRI71597



Type: LED-1L15E350BD14/PC64 HF CORR 4K#

Short description of the luminaire: White surface-mounted LED light with CORRIDOR function and polycarbonate shade



Technical

| | |
|------------------------------|-------------------------|
| Types of luminaires | Corridor |
| Mounting type | surface mounted |
| Base material | polypropylene composite |
| Shade material | opal polycarbonate |
| Base color | white Ra9003 |
| Shade color | white |
| Holding the shade | bayonet |
| Mounting location | ceiling/wall |
| Width | 317 mm |
| Length | 317 mm |
| Height | 78 mm |
| Diameter | ø 317 mm |
| mounting holes (diameter) | 3xø5mm |
| Installation wire (diameter) | 2xø16mm |
| Energy Class | D |
| Impact strength | IK10 |
| Operating temperature | from -20°C to +30°C |




Electric

| | |
|-------------------------------------|---------------------|
| Power consumption | 13 W |
| Ingress Protection | IP65 |
| Socket | LED modul |
| Sensor | HF |
| terminal block | snap terminal block |
| Automatic circuit breaker type B10A | 21 pcs |
| Automatic circuit breaker type B16A | 35 pcs |
| Automatic circuit breaker type C10A | 35 pcs |
| Automatic circuit breaker type C16A | 58 pcs |

Luminous

| | |
|-----------------------------|--------------|
| Lum. flux of luminaire | 1510 lm |
| Lum. flux of light source | 2220 lm |
| Luminaire efficacy | 116 lm/W |
| Temperature | 4000 K |
| Rated life time LED L80/B10 | 100000 hours |
| CRI | Ra80 |
| MacAdam | 3 |
| Blue light hazard | Risk group 0 |

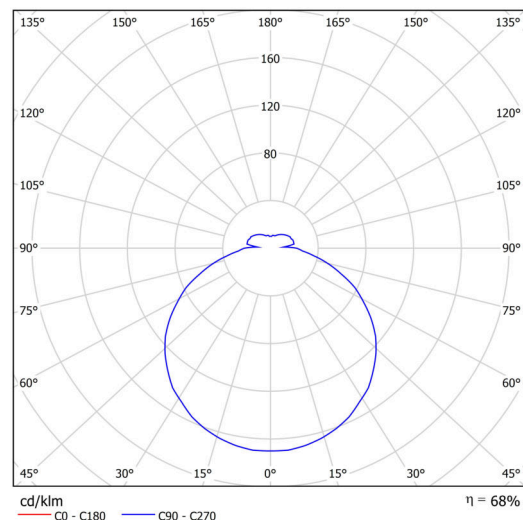


Eulum data for calculation programs are available at www.osmont.cz.

Logistic

| | |
|-------------------|----------------------|
| EAN | 8591728138202 |
| Weight NTTO | 0.69 Kg |
| Weight BTTO | 0.89 Kg |
| Number of cartons | 1 pcs |
| Package volume | 0.012 m ³ |
| Package 1 width | 0.325 m |
| Package 1 length | 0.325 m |
| Package 1 height | 0.11 m |
| Warranty* | 60 months |



*The warranty for the batteries is valid for 12 months from the date of purchase.

Installation dimensions:

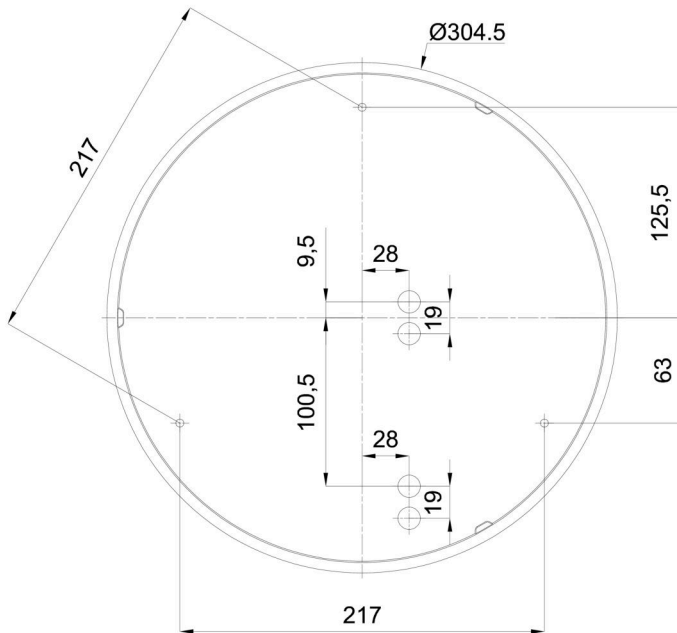

Additional assortment:

Lampshade

| Product code | Name | Color | Description | Picture | Drawing |
|--------------|------|-------|-------------|--|---|
| 20612 | PC64 | white | |  |  |