



## ISIS L2 PM-M

LED-5L06E450ZL11/PM2M/L100 NL DALI 3K#

[WWW.OSMONT.CZ](http://WWW.OSMONT.CZ)

## ISIS L2 PM-M

Product code: ISI70189


Type: LED-5L06E450ZL11/PM2M/L100 NL DALI 3K#

Short description of the luminaire: Stainless polished pendant LED light DALI and PMMA matt shade.



### Technical

Types of luminaires	Dimmable
Mounting type	Suspended - wire
Base material	stainless steel steel
Shade material	opal polymethyl methacrylate
Base color	polished stainless steel
Shade color	white
Holding the shade	steel holder
Mounting location	ceiling
Width	300 mm
Length	300 mm
Height	300 mm
Diameter	Ø 300 mm
Hinge length	1000 mm
mounting holes (diameter)	none
Installation wire (diameter)	none
Energy Class	D
Impact strength	IK06
Operating temperature	from -20°C to +30°C

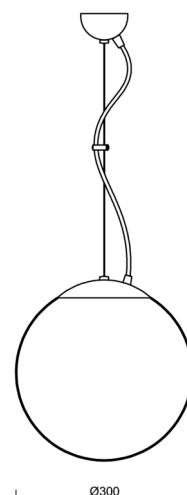


### Electric

Power consumption	20 W
Ingress Protection	IP40
Socket	LED modul
terminal block	none
Automatic circuit breaker type B10A	31 pcs
Automatic circuit breaker type B16A	50 pcs
Automatic circuit breaker type C10A	52 pcs
Automatic circuit breaker type C16A	85 pcs

### Luminous

Lum. flux of luminaire	2960 lm
Lum. flux of light source	3360 lm
Luminaire efficacy	148 lm/W
Temperature	3000 K
Rated life time LED L80/B10	100000 hours
CRI	Ra80
MacAdam	3
Blue light hazard	Risk group 0

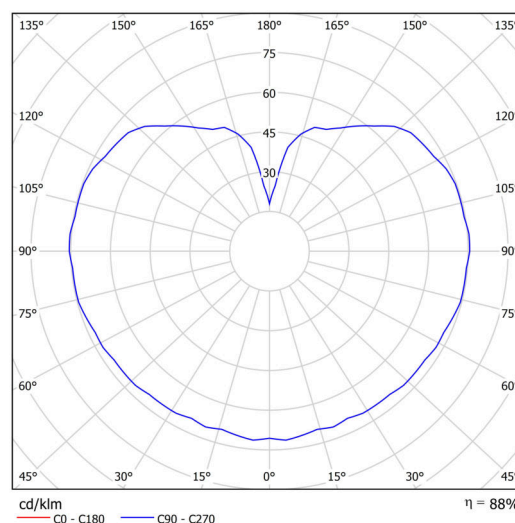

Eulum data for calculation programs are available at [www.osmont.cz](http://www.osmont.cz).

## TECHNICAL SHEET



### Logistic

EAN	8591728040642
Weight NTTO	2.4 Kg
Weight BTTO	2.9 Kg
Number of cartons	2 pcs
Package volume	0.035 m <sup>3</sup>
Package 1 width	0.31 m
Package 1 length	0.31 m
Package 1 height	0.31 m
Warranty*	60 months

*\*The warranty for the batteries is valid for 12 months from the date of purchase.*

### Additional assortment:

#### Lampshade

Product code	Name	Color	Description	Picture	Drawing
20600	PM2-M	white		