



## ISIS L3A PM-M

LED-5L06E550ZL11/PM3AM/L100 NK3HST NB 4K#

[WWW.OSMONT.CZ](http://WWW.OSMONT.CZ)

# ISIS L3A PM-M

Product code: ISI75519


Type: LED-5L06E550ZL11/PM3AM/L100 NK3HST NB 4K#

Short description of the luminaire: Stainless steel brushed | pendant LED light with emergency backup combined ( with Self-test) | matt PMMA shade| steel wire pendant ( with supply cable) 100 cm |



## Technical data

|                           |                              |
|---------------------------|------------------------------|
| Types of luminaires       | Emergency combined SELFTEST  |
| Mounting type             | Suspended - wire             |
| Base material             | stainless steel steel        |
| Shade material            | opal polymethyl methacrylate |
| Base color                | brushed stainless steel      |
| Shade color               | white                        |
| Holding the shade         | steel holder                 |
| Mounting location         | ceiling                      |
| Width                     | 350 mm                       |
| Length                    | 350 mm                       |
| Height                    | 350 mm                       |
| Diameter                  | ø 350 mm                     |
| Suspension length         | 1000 mm                      |
| mounting holes (diameter) | none                         |
| Energy Class              | D                            |
| Impact strength           | IK06                         |
| Operating temperature     | from +5°C to +30°C           |

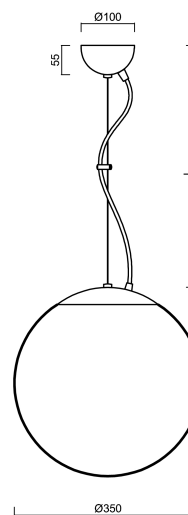

## Electrical data

|                                     |           |
|-------------------------------------|-----------|
| Power consumption                   | 26 W      |
| Ingress Protection                  | IP40      |
| Socket                              | LED modul |
| Battery type                        | LiFePO4   |
| Emergency time                      | 3 hours   |
| SELFTEST                            | yes       |
| terminal block                      | none      |
| Automatic circuit breaker type B10A | 15 pcs    |
| Automatic circuit breaker type B16A | 25 pcs    |
| Automatic circuit breaker type C10A | 31 pcs    |
| Automatic circuit breaker type C16A | 48 pcs    |
| Number of LED drivers               | 1         |

## Luminous data

|   |          |
|---|----------|
| Lum. flux of luminaire                      | 3750 lm  |
| Lum. flux of light source                   | 4260 lm  |
| Lum. flux of light source in emergency mode | 200 lm   |
| Luminaire efficacy                          | 144 lm/W |
| Chromaticity temperature                    | 4000 K   |



## TECHNICAL SHEET



|                             |              |
|-----------------------------|--------------|
| Rated life time LED L80/B10 | 100000 hours |
| CRI                         | Ra80         |
| MacAdam                     | 3            |
| Blue light hazard           | Risk group 0 |

*Eulum data for calculation programs are available at [www.osmont.cz](http://www.osmont.cz).*


## Logistical data

|           |               |
|-----------|---------------|
| EAN       | 8591728225759 |
| Warranty* | 60 months     |

*\*The warranty for the batteries is valid for 36 months from the date of purchase.*

## Additional assortment:

### Lampshade

| Product code | Name          | Color | Picture  | Drawing |
|--------------|---------------|-------|--|---------|
| 20727        | PM3AM (350mm) | white |  |         |