



## ISIS P3 PE HP

---

LED-5L08E850Z11/PE3/a3 NL DALI 4K#

[WWW.OSMONT.CZ](http://WWW.OSMONT.CZ)

# ISIS P3 PE HP

Product code: ISI62937


Type: LED-5L08E850Z11/PE3/a3 NL DALI 4K#

Short description of the luminaire: Stainless steel polished | pendant high-power LED light DALI | polyethylene shadel rod pendant 60 cm |



## Technical

|                           |                          |
|---------------------------|--------------------------|
| Types of luminaires       | Dimmable                 |
| Mounting type             | Suspended - rod          |
| Base material             | stainless steel steel    |
| Shade material            | polyethylene             |
| Base color                | polished stainless steel |
| Shade color               | white                    |
| Holding the shade         | folding system           |
| Mounting location         | ceiling                  |
| Width                     | 400 mm                   |
| Length                    | 400 mm                   |
| Height                    | 400 mm                   |
| Diameter                  | ø 400 mm                 |
| Hinge length              | 600 mm                   |
| mounting holes (diameter) | 3xø5mm                   |
| Cable entrance            | 2xø16mm                  |
| Energy Class              | D                        |
| Impact strength           | IK10                     |
| Operating temperature     | from -20°C to +30°C      |

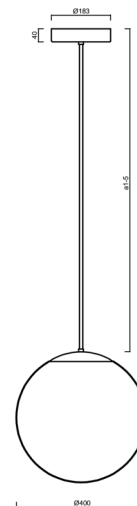

## Electric

|                                     |                     |
|-------------------------------------|---------------------|
| Power consumption                   | 52 W                |
| Ingress Protection                  | IP40                |
| Socket                              | LED modul           |
| terminal block                      | snap terminal block |
| Automatic circuit breaker type B10A | 15 pcs              |
| Automatic circuit breaker type B16A | 25 pcs              |
| Automatic circuit breaker type C10A | 26 pcs              |
| Automatic circuit breaker type C16A | 42 pcs              |

## Luminous

|                             |              |
|-----------------------------|--------------|
| Lum. flux of luminaire      | 7610 lm      |
| Lum. flux of light source   | 8650 lm      |
| Luminaire efficacy          | 146 lm/W     |
| Temperature                 | 4000 K       |
| Rated life time LED L80/B10 | 100000 hours |
| CRI                         | Ra80         |
| MacAdam                     | 3            |
| Blue light hazard           | Risk group 0 |



Eulum data for calculation programs are available at [www.osmont.cz](http://www.osmont.cz).

Logistic

|                   |                      |
|-------------------|----------------------|
| EAN               | 8591728019778        |
| Weight NTTO       | 3.2 Kg               |
| Weight BTTO       | 4.3 Kg               |
| Number of cartons | 2 pcs                |
| Package volume    | 0.081 m <sup>3</sup> |
| Package 1 width   | 0.405 m              |
| Package 1 length  | 0.405 m              |
| Package 1 height  | 0.41 m               |
| Warranty*         | 60 months            |

\*The warranty for the batteries is valid for 12 months from the date of purchase.

Installation dimensions:



## Additional assortment:

## Lampshade

| Product code | Name | Color | Description   | Picture   | Drawing |
|--------------|------|-------|---------------|---|---------|
| 20530        | PE3  | white | příslušenství |  |         |