



## **ISIS P3 PM HP**

---

LED-5L08E850Z11/PM3/a5 NL DALI 4K#

[WWW.OSMONT.CZ](http://WWW.OSMONT.CZ)

## ISIS P3 PM HP

Product code: ISI64614

Type: LED-5L08E850Z11/PM3/a5 NL DALI 4K#

Short description of the luminaire: Stainless steel polished | pendant high-power LED light DALI | PMMA shade | rod pendant 100 cm |

### Technical

|                           |                                |
|---------------------------|--------------------------------|
| Types of luminaires       | Dimmable                       |
| Mounting type             | Suspended - rod                |
| Base material             | stainless steel steel          |
| Shade material            | glossy polymethyl methacrylate |
| Base color                | polished stainless steel       |
| Shade color               | white                          |
| Holding the shade         | steel holder                   |
| Mounting location         | ceiling                        |
| Width                     | 400 mm                         |
| Length                    | 400 mm                         |
| Height                    | 400 mm                         |
| Diameter                  | ø 400 mm                       |
| Hinge length              | 1000 mm                        |
| mounting holes (diameter) | 3xø5mm                         |
| Cable entrance            | 2xø16mm                        |
| Energy Class              | D                              |
| Impact strength           | IK06                           |
| Operating temperature     | from -20°C to +30°C            |

### Electric



|                                     |                     |
|-------------------------------------|---------------------|
| Power consumption                   | 52 W                |
| Ingress Protection                  | IP40                |
| Socket                              | LED modul           |
| terminal block                      | snap terminal block |
| Automatic circuit breaker type B10A | 15 pcs              |
| Automatic circuit breaker type B16A | 25 pcs              |
| Automatic circuit breaker type C10A | 26 pcs              |
| Automatic circuit breaker type C16A | 42 pcs              |

### Luminous

|                             |              |
|-----------------------------|--------------|
| Lum. flux of luminaire      | 7610 lm      |
| Lum. flux of light source   | 8650 lm      |
| Luminaire efficacy          | 146 lm/W     |
| Temperature                 | 4000 K       |
| Rated life time LED L80/B10 | 100000 hours |
| CRI                         | Ra80         |
| MacAdam                     | 3            |
| Blue light hazard           | Risk group 0 |

Eulum data for calculation programs are available at [www.osmont.cz](http://www.osmont.cz).

OSMONT, s.r.o.  
HYBRÁLEC 129,  
586 01 JIHLAVA, CZ

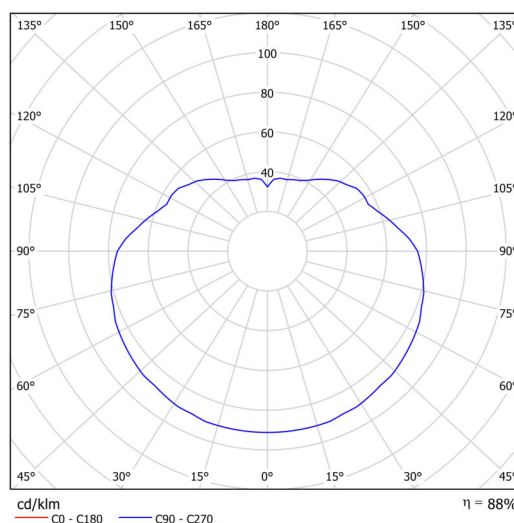

Logistic

|                   |                      |
|-------------------|----------------------|
| EAN               | 8591728031145        |
| Weight NTTO       | 3.2 Kg               |
| Weight BTTO       | 4.3 Kg               |
| Number of cartons | 2 pcs                |
| Package volume    | 0.109 m <sup>3</sup> |
| Package 1 width   | 0.405 m              |
| Package 1 length  | 0.405 m              |
| Package 1 height  | 0.41 m               |
| Warranty*         | 60 months            |

\*The warranty for the batteries is valid for 12 months from the date of purchase.

Installation dimensions:



## Additional assortment:

## Lampshade

| Product code | Name | Color | Description   | Picture                                                                             | Drawing |
|--------------|------|-------|---------------|-------------------------------------------------------------------------------------|---------|
| 20601        | PM3  | white | příslušenství |  |         |