



ISIS P3A PM-M HP

LED-5L06E900Z11/PM3AM/L40 NK3HST MS 3K#

WWW.OSMONT.CZ

ISIS P3A PM-M HP

Product code: ISI74436

Type: LED-5L06E900Z11/PM3AM/L40 NK3HST MS 3K#

Short description of the luminaire: Brass polished | pendant high-power LED light with emergency backup combined (with Self-test) | matt PMMA shade| rod pendant 40 cm |

Technical data



Types of luminaires	Emergency combined SELFTEST
Mounting type	Suspended - rod
Base material	brass
Shade material	opal polymethyl methacrylate
Base color	polished brass
Shade color	white
Holding the shade	steel holder
Mounting location	ceiling
Width	350 mm
Length	350 mm
Height	350 mm
Diameter	Ø 350 mm
Suspension length	400 mm
mounting holes (diameter)	none
Energy Class	D
Impact strength	IK06
Operating temperature	from +5°C to +30°C

Electrical data

Power consumption	43 W
Ingress Protection	IP40
Socket	LED modul
Battery type	LiFePO4
Emergency time	3 hours
SELFTEST	yes
terminal block	none
Automatic circuit breaker type B10A	7 pcs
Automatic circuit breaker type B16A	12 pcs
Automatic circuit breaker type C10A	13 pcs
Automatic circuit breaker type C16A	21 pcs
Number of LED drivers	1

Luminous data

Lum. flux of luminaire	5630 lm
Lum. flux of light source	6400 lm
Lum. flux of light source in emergency mode	200 lm
Luminaire efficacy	130 lm/W
Chromaticity temperature	3000 K
Rated life time LED L80/B10	100000 hours

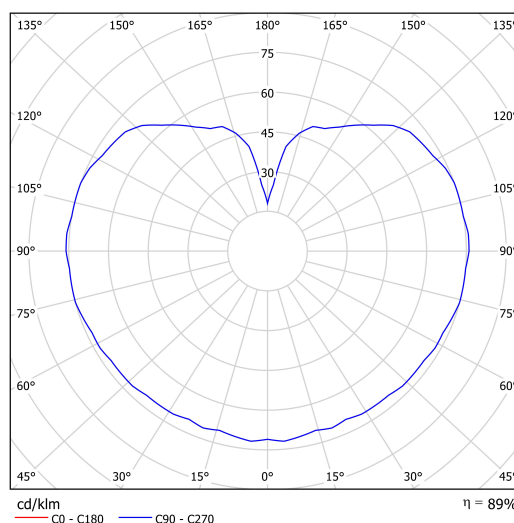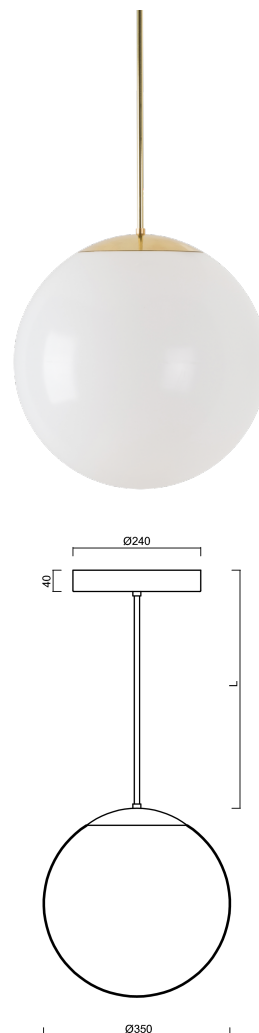

CRI	Ra80
MacAdam	3
Blue light hazard	Risk group 0

EAN	8591728218119
Warranty*	60 months

Technical drawing of a circular plate with the following dimensions and features:

- Overall diameter: $\varnothing 230$
- Overall width: 164,5
- Overall height: 95
- Distance from top edge to center of top hole: 47,5
- Distance from center to center of each side hole: 10
- Distance from center to center of each bottom hole: 20
- Distance from center to center of each side hole: 30
- Distance from center to center of each bottom hole: 30

Additional assortment:

Lampshade

Product code	Name	Color	Picture	Drawing
20727	PM3AM (350mm)	white		