



## ISIS P3A PM-M HP

---

LED-5L06E900Z11/PM3AM/L100 NL 4K#

[WWW.OSMONT.CZ](http://WWW.OSMONT.CZ)

## ISIS P3A PM-M HP

Product code: ISI74944

Type: LED-5L06E900Z11/PM3AM/L100 NL 4K#

Short description of the luminaire: Stainless steel polished | pendant high-power LED light ON/OFF | matt PMMA shade | rod pendant 100 cm |

### Technical data

|                           |                              |
|---------------------------|------------------------------|
| Types of luminaires       | Classic on/off               |
| Mounting type             | Suspended - rod              |
| Base material             | stainless steel steel        |
| Shade material            | opal polymethyl methacrylate |
| Base color                | polished stainless steel     |
| Shade color               | white                        |
| Holding the shade         | steel holder                 |
| Mounting location         | ceiling                      |
| Width                     | 350 mm                       |
| Length                    | 350 mm                       |
| Height                    | 350 mm                       |
| Diameter                  | ø 350 mm                     |
| Suspension length         | 1000 mm                      |
| mounting holes (diameter) | none                         |
| Energy Class              | D                            |
| Impact strength           | IK06                         |
| Operating temperature     | from -20°C to +30°C          |

### Electrical data



|                                     |           |
|-------------------------------------|-----------|
| Power consumption                   | 43 W      |
| Ingress Protection                  | IP40      |
| Socket                              | LED modul |
| terminal block                      | none      |
| Automatic circuit breaker type B10A | 10 pcs    |
| Automatic circuit breaker type B16A | 16 pcs    |
| Automatic circuit breaker type C10A | 16 pcs    |
| Automatic circuit breaker type C16A | 26 pcs    |
| Number of LED drivers               | 1         |

### Luminous data

|                             |              |
|-----------------------------|--------------|
| Lum. flux of luminaire      | 5870 lm      |
| Lum. flux of light source   | 6670 lm      |
| Luminaire efficacy          | 136 lm/W     |
| Chromaticity temperature    | 4000 K       |
| Rated life time LED L80/B10 | 100000 hours |
| CRI                         | Ra80         |
| MacAdam                     | 3            |
| Blue light hazard           | Risk group 0 |

Eulum data for calculation programs are available at [www.osmont.cz](http://www.osmont.cz).

OSMONT, s.r.o.  
HYBRÁLEC 129,  
586 01 JIHLAVA, CZ

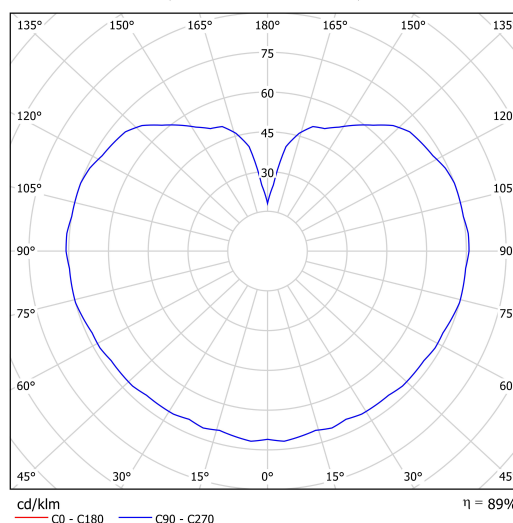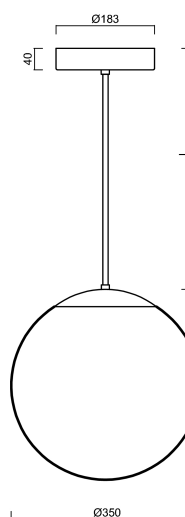

[www.osmont.cz](http://www.osmont.cz)  
[osmont@osmont.cz](mailto:osmont@osmont.cz)  
[+420] 567 210 023

24.05.2026

## TECHNICAL SHEET



### Logistical data

|           |               |
|-----------|---------------|
| EAN       | 8591728223007 |
| Warranty* | 60 months     |

*\*The warranty for the batteries is valid for 36 months from the date of purchase.*

### Installation dimensions:



## Additional assortment:

## Lampshade

| Product code | Name          | Color | Picture                                                                           | Drawing |
|--------------|---------------|-------|-----------------------------------------------------------------------------------|---------|
| 20727        | PM3AM (350mm) | white |  |         |