



ISIS P4 PE

LED-5L07E900Z11/PE4/a2/NK1W B 4K##

WWW.OSMONT.CZ

ISIS P4 PE

Product code: IS166611

Type: LED-5L07E900Z11/PE4/a2/NK1W B 4K##

Short description of the luminaire: White pendant LED light with emergency unit combined and polyethylene shade.



Technical


| | |
|------------------------------|--------------------|
| Types of luminaires | Emergency combined |
| Mounting type | Suspended - rod |
| Base material | steel |
| Shade material | polyethylene |
| Base color | white Ra9003 |
| Shade color | white |
| Holding the shade | folding system |
| Mounting location | ceiling |
| Width | 500 mm |
| Length | 500 mm |
| Height | 500 mm |
| Diameter | ø 500 mm |
| Hinge length | 400 mm |
| mounting holes (diameter) | none |
| Installation wire (diameter) | none |
| Energy Class | D |
| Impact strength | IK10 |
| Operating temperature | from 0°C to +30°C |

Electric

| | |
|-------------------------------------|-----------|
| Power consumption | 41 W |
| Ingress Protection | IP40 |
| Socket | LED modul |
| Battery type | NiCd |
| Emergency time | 3 hours |
| terminal block | none |
| Automatic circuit breaker type B10A | 25 pcs |
| Automatic circuit breaker type B16A | 43 pcs |
| Automatic circuit breaker type C10A | 29 pcs |
| Automatic circuit breaker type C16A | 52 pcs |

Luminous

| | |
|---|--------------|
| Lum. flux of luminaire | 6120 lm |
| Lum. flux of light source | 6960 lm |
| Lum. flux of light source in emergency mode | 150 lm |
| Luminaire efficacy | 149 lm/W |
| Temperature | 4000 K |
| Rated life time LED L80/B10 | 100000 hours |
| CRI | Ra80 |
| MacAdam | 3 |
| Blue light hazard | Risk group 0 |

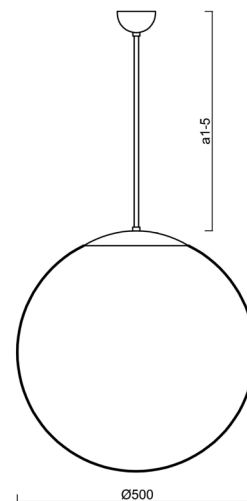

TECHNICAL SHEET



Eulum data for calculation programs are available at
www.osmont.cz.


Logistic

| | |
|-------------------|----------------------|
| EAN | 8591728037079 |
| Weight NTTO | 4.4 Kg |
| Weight BTTO | 6.3 Kg |
| Number of cartons | 2 pcs |
| Package volume | 0.164 m ³ |
| Package 1 width | 0.52 m |
| Package 1 length | 0.52 m |
| Package 1 height | 0.53 m |
| Warranty* | 60 months |

*The warranty for the batteries is valid for 12 months from the date of purchase.

Additional assortment:

Lampshade

| Product code | Name | Color | Description | Picture | Drawing |
|--------------|------|-------|-------------|--|---------|
| 20531 | PE4 | white | |  | |