



## ISIS P4 PM-M

LED-5L07E900Z11/PM4M/a1 NK3HST NB 4K##

[WWW.OSMONT.CZ](http://WWW.OSMONT.CZ)

# ISIS P4 PM-M

Product code: ISI60965

Type: LED-5L07E900Z11/PM4M/a1 NK3HST NB 4K##

Short description of the luminaire: Stainless steel brushed | pendant LED light with emergency backup combined ( with Self-test) | matt PMMA shade| rod pendant 20 cm |



## Technical

|                           |                              |
|---------------------------|------------------------------|
| Types of luminaires       | Emergency combined SELFTEST  |
| Mounting type             | Suspended - rod              |
| Base material             | stainless steel steel        |
| Shade material            | opal polymethyl methacrylate |
| Base color                | brushed stainless steel      |
| Shade color               | white                        |
| Holding the shade         | steel holder                 |
| Mounting location         | ceiling                      |
| Width                     | 500 mm                       |
| Length                    | 500 mm                       |
| Height                    | 500 mm                       |
| Hinge length              | 200 mm                       |
| mounting holes (diameter) | none                         |
| Cable entrance            | none                         |
| Energy Class              | D                            |
| Impact strength           | IK06                         |
| Operating temperature     | from -20°C to +30°C          |


## Electric

|                    |           |
|--------------------|-----------|
| Power consumption  | 41 W      |
| Ingress Protection | IP40      |
| Socket             | LED modul |
| Battery type       | LiFePO4   |
| Emergency time     | 3 hours   |
| SELFTEST           | yes       |
| terminal block     | none      |

## Luminous

|   |              |
|---|--------------|
| Lum. flux of luminaire                      | 6120 lm      |
| Lum. flux of light source                   | 6960 lm      |
| Lum. flux of light source in emergency mode | 200 lm       |
| Temperature                                 | 4000 K       |
| Rated life time LED L80/B10                 | 100000 hours |
| CRI   | Ra80         |
| MacAdam                                     | 3            |
| Blue light hazard                           | Risk group 0 |

Eulum data for calculation programs are available at [www.osmont.cz](http://www.osmont.cz).

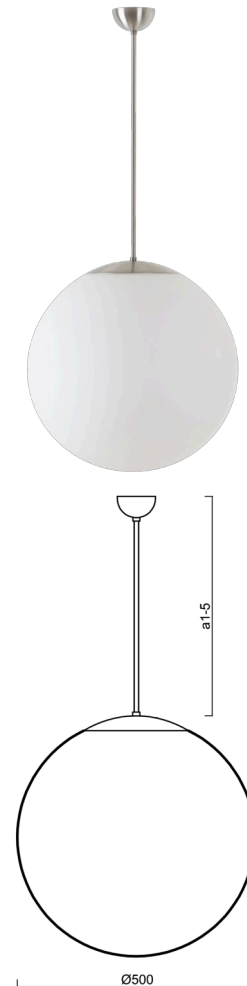


Logistic

|                   |                      |
|-------------------|----------------------|
| EAN               | 8591728155698        |
| Weight NTTO       | 4.4 Kg               |
| Weight BTTO       | 6.3 Kg               |
| Number of cartons | 2 pcs                |
| Package volume    | 0.157 m <sup>3</sup> |
| Package 1 width   | 0.52 m               |
| Package 1 length  | 0.52 m               |
| Package 1 height  | 0.53 m               |
| Warranty*         | 60 months            |

*\*The warranty for the batteries is valid for 12 months from the date of purchase.*

Additional assortment:

Lampshade

| Product code | Name  | Color | Description   | Picture  | Drawing |
|--------------|-------|-------|---------------|--|---------|
| 20604        | PM4-M | white | příslušenství |  |         |