



## ISIS P4 PM-M

LED-5L07E900Z11/PM4M/a1/NK1W NL 3K##

[WWW.OSMONT.CZ](http://WWW.OSMONT.CZ)

# ISIS P4 PM-M

Product code: ISI70055

Type: LED-5L07E900Z11/PM4M/a1/NK1W NL 3K##

Short description of the luminaire: Stainless polished pendant LED light with emergency unit combined and PMMA matt shade.



## Technical


|                              |                              |
|------------------------------|------------------------------|
| Types of luminaires          | Emergency combined           |
| Mounting type                | Suspended - rod              |
| Base material                | stainless steel steel        |
| Shade material               | opal polymethyl methacrylate |
| Base color                   | polished stainless steel     |
| Shade color                  | white                        |
| Holding the shade            | steel holder                 |
| Mounting location            | ceiling                      |
| Width                        | 500 mm                       |
| Length                       | 500 mm                       |
| Height                       | 500 mm                       |
| Diameter                     | Ø 500 mm                     |
| Hinge length                 | 200 mm                       |
| mounting holes (diameter)    | none                         |
| Installation wire (diameter) | none                         |
| Energy Class                 | D                            |
| Impact strength              | IK06                         |
| Operating temperature        | from 0°C to +30°C            |

## Electric

|                                     |           |
|-------------------------------------|-----------|
| Power consumption                   | 41 W      |
| Ingress Protection                  | IP40      |
| Socket                              | LED modul |
| Battery type                        | NiCd      |
| Emergency time                      | 3 hours   |
| terminal block                      | none      |
| Automatic circuit breaker type B10A | 25 pcs    |
| Automatic circuit breaker type B16A | 43 pcs    |
| Automatic circuit breaker type C10A | 29 pcs    |
| Automatic circuit breaker type C16A | 52 pcs    |

## Luminous

|   |              |
|---|--------------|
| Lum. flux of luminaire                      | 5870 lm      |
| Lum. flux of light source                   | 6670 lm      |
| Lum. flux of light source in emergency mode | 150 lm       |
| Luminaire efficacy                          | 143 lm/W     |
| Temperature                                 | 3000 K       |
| Rated life time LED L80/B10                 | 100000 hours |
| CRI   | Ra80         |
| MacAdam                                     | 3            |
| Blue light hazard                           | Risk group 0 |

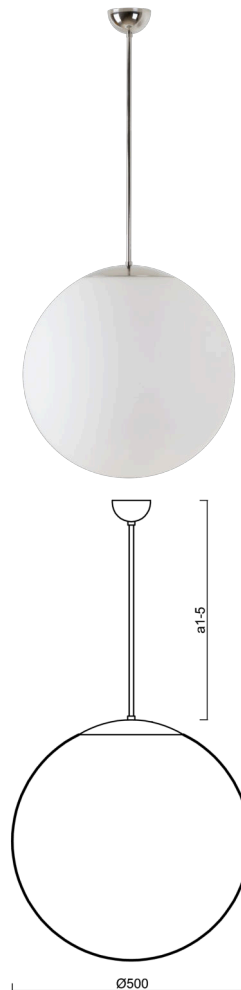

## TECHNICAL SHEET



Eulum data for calculation programs are available at  
[www.osmont.cz](http://www.osmont.cz).

### Logistic

|                   |                      |
|-------------------|----------------------|
| EAN               | 8591728039370        |
| Weight NTTO       | 4.4 Kg               |
| Weight BTTO       | 6.3 Kg               |
| Number of cartons | 2 pcs                |
| Package volume    | 0.157 m <sup>3</sup> |
| Package 1 width   | 0.52 m               |
| Package 1 length  | 0.52 m               |
| Package 1 height  | 0.53 m               |
| Warranty*         | 60 months            |

\*The warranty for the batteries is valid for 12 months from the date of purchase.

### Additional assortment:

#### Lampshade

| Product code | Name  | Color | Description | Picture  | Drawing |
|--------------|-------|-------|-------------|--|---------|
| 20604        | PM4-M | white |             |  |         |