



ISIS P5 PM-M HP

LED-5L08E1050Z11/PM5M/a5 NB DALI 3K##


WWW.OSMONT.CZ

ISIS P5 PM-M HP

Product code: ISI60239

Type: LED-5L08E1050Z11/PM5M/a5 NB DALI 3K##

Short description of the luminaire: Stainless steel brushed | pendant high-power LED light DALI | matt PMMA shade | rod pendant 100 cm |

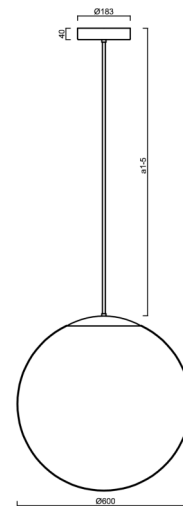

Technical

| | |
|---------------------------|------------------------------|
| Types of luminaires | Dimmable |
| Mounting type | Suspended - rod |
| Base material | stainless steel steel |
| Shade material | opal polymethyl methacrylate |
| Base color | brushed stainless steel |
| Shade color | white |
| Holding the shade | steel holder |
| Mounting location | ceiling |
| Width | 600 mm |
| Length | 600 mm |
| Height | 600 mm |
| Diameter | ø 600 mm |
| Hinge length | 1000 mm |
| mounting holes (diameter) | 3xø5mm |
| Cable entrance | 2xø16mm |
| Energy Class | D |
| Impact strength | IK06 |
| Operating temperature | from -20°C to +30°C |

Electric

| | |
|-------------------------------------|---------------------|
| Power consumption | 65 W |
| Ingress Protection | IP40 |
| Socket | LED modul |
| terminal block | snap terminal block |
| Automatic circuit breaker type B10A | 15 pcs |
| Automatic circuit breaker type B16A | 25 pcs |
| Automatic circuit breaker type C10A | 26 pcs |
| Automatic circuit breaker type C16A | 42 pcs |

Luminous

| | |
|-----------------------------|--------------|
| Lum. flux of luminaire | 8890 lm |
| Lum. flux of light source | 10100 lm |
| Luminaire efficacy | 136 lm/W |
| Temperature | 3000 K |
| Rated life time LED L80/B10 | 100000 hours |
| CRI | Ra80 |
| MacAdam | 3 |
| Blue light hazard | Risk group 0 |



Eulum data for calculation programs are available at www.osmont.cz.

Logistic

| | |
|-------------------|----------------------|
| EAN | 8591728014216 |
| Weight NTTO | 5.6 Kg |
| Weight BTTO | 8.2 Kg |
| Number of cartons | 2 pcs |
| Package volume | 0.278 m ³ |
| Package 1 width | 0.62 m |
| Package 1 length | 0.62 m |
| Package 1 height | 0.63 m |
| Warranty* | 60 months |

*The warranty for the batteries is valid for 12 months from the date of purchase.

Installation dimensions:



Additional assortment:

Lampshade

| Product code | Name | Color | Description | Picture | Drawing |
|--------------|-------|-------|---------------|---|---------|
| 20667 | PM5-M | white | příslušenství |  | |