



## ISIS S3 PM HP

LED-5L08E850ZS11/PM3/L100/NK1W B 4K#

[WWW.OSMONT.CZ](http://WWW.OSMONT.CZ)

## ISIS S3 PM HP

Product code: ISI72735

Type: LED-5L08E850ZS11/PM3/L100/NK1W B 4K#

Short description of the luminaire: White colour | pendant high-power LED light with emergency backup combined | PMMA shade | cable pendant ( with inner support wire) 100 cm |



### Technical



|                           |                                |
|---------------------------|--------------------------------|
| Types of luminaires       | Emergency combined             |
| Mounting type             | Suspended - cable              |
| Base material             | steel                          |
| Shade material            | glossy polymethyl methacrylate |
| Base color                | white Ral9003                  |
| Shade color               | white                          |
| Holding the shade         | steel holder                   |
| Mounting location         | ceiling                        |
| Width                     | 400 mm                         |
| Length                    | 400 mm                         |
| Height                    | 400 mm                         |
| Diameter                  | ø 400 mm                       |
| Hinge length              | 1000 mm                        |
| mounting holes (diameter) | 3xØ5mm                         |
| Cable entrance            | 2xØ16mm                        |
| Energy Class              | D                              |
| Impact strength           | IK06                           |
| Operating temperature     | from 0°C to +30°C              |

### Electric

|                                     |                     |
|-------------------------------------|---------------------|
| Power consumption                   | 52 W                |
| Ingress Protection                  | IP40                |
| Socket                              | LED modul           |
| Battery type                        | NiCd                |
| Emergency time                      | 3 hours             |
| SELFTEST                            | no                  |
| terminal block                      | snap terminal block |
| Automatic circuit breaker type B10A | 12 pcs              |
| Automatic circuit breaker type B16A | 20 pcs              |
| Automatic circuit breaker type C10A | 22 pcs              |
| Automatic circuit breaker type C16A | 36 pcs              |

### Luminous

|                                             |              |
|---------------------------------------------|--------------|
| Lum. flux of luminaire                      | 7610 lm      |
| Lum. flux of light source                   | 8650 lm      |
| Lum. flux of light source in emergency mode | 170 lm       |
| Luminaire efficacy                          | 146 lm/W     |
| Temperature                                 | 4000 K       |
| Rated life time LED L80/B10                 | 100000 hours |
| CRI                                         | Ra80         |

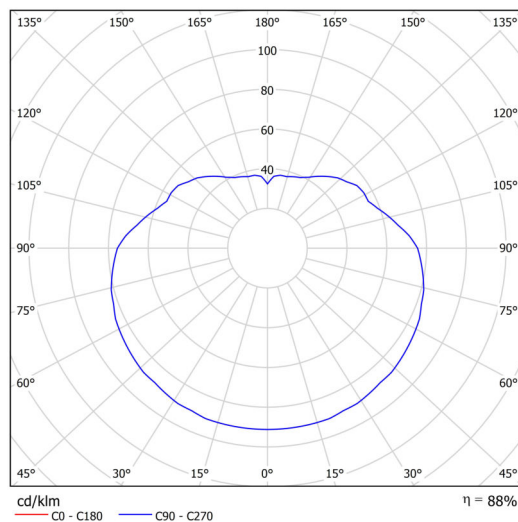

## TECHNICAL SHEET



|                   |              |
|-------------------|--------------|
| MacAdam           | 3            |
| Blue light hazard | Risk group 0 |


Eulum data for calculation programs are available at  
[www.osmont.cz](http://www.osmont.cz).

### Logistic

|                   |                      |
|-------------------|----------------------|
| EAN               | 8591728048624        |
| Weight NTTO       | 3.4 Kg               |
| Weight BTTO       | 4.1 Kg               |
| Number of cartons | 2 pcs                |
| Package volume    | 0.072 m <sup>3</sup> |
| Package 1 width   | 0.405 m              |
| Package 1 length  | 0.405 m              |
| Package 1 height  | 0.41 m               |
| Warranty*         | 60 months            |

\*The warranty for the batteries is valid for 12 months from the date of purchase.

### Installation dimensions:

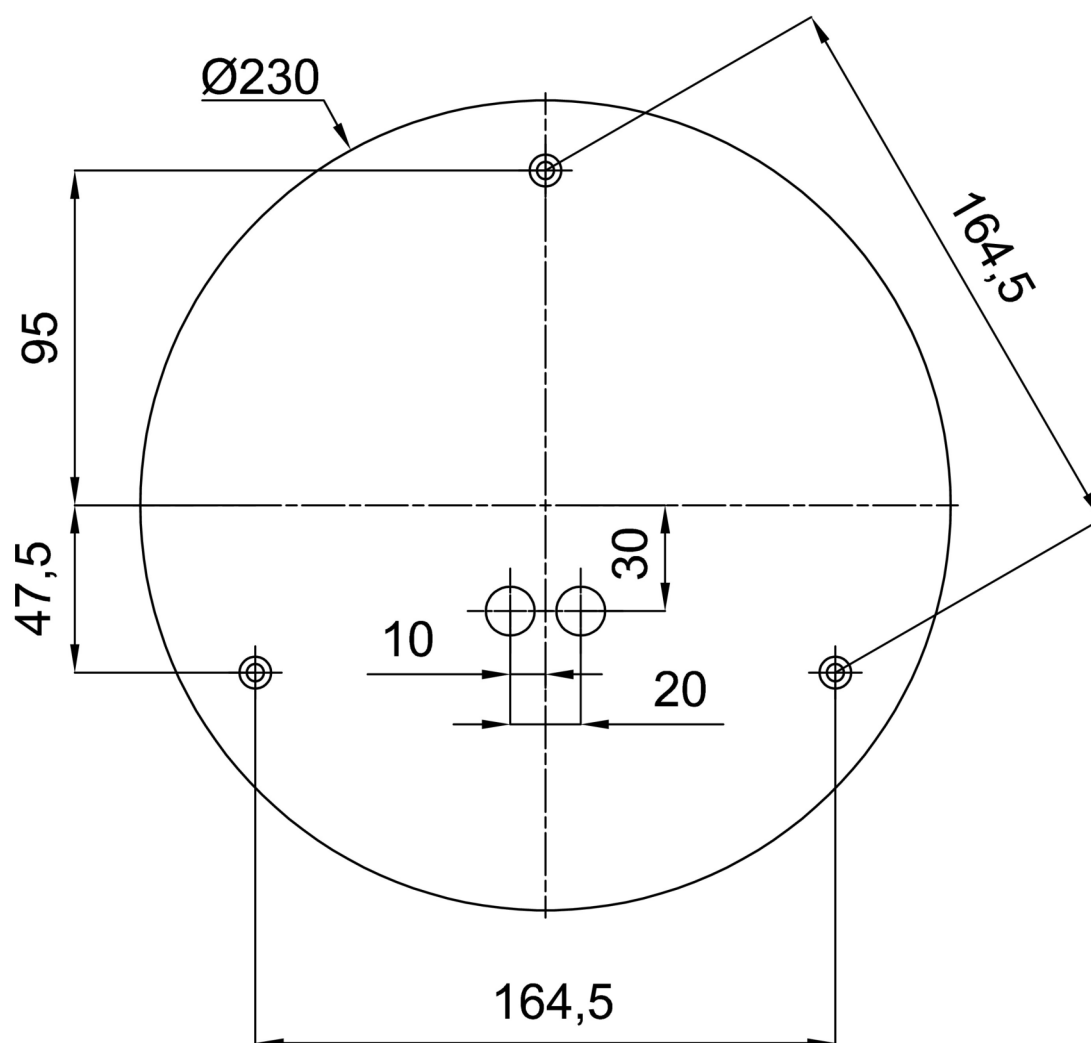

## Additional assortment:

## Lampshade

| Product code | Name | Color | Description   | Picture                                                                             | Drawing |
|--------------|------|-------|---------------|-------------------------------------------------------------------------------------|---------|
| 20601        | PM3  | white | příslušenství |  |         |