



## ISIS S4 PM-M

LED-5L07E900ZS11/PM4M/L100/NK1W NL 3K##

[WWW.OSMONT.CZ](http://WWW.OSMONT.CZ)

# ISIS S4 PM-M

Product code: ISI70331


Type: LED-5L07E900ZS11/PM4M/L100/NK1W NL 3K##

Short description of the luminaire: Stainless polished pendant LED light with emergency unit combined and PMMA matt shade.



## Technical

Types of luminaires	Emergency combined
Mounting type	Suspended - cable
Base material	stainless steel steel
Shade material	opal polymethyl methacrylate
Base color	polished stainless steel
Shade color	white
Holding the shade	steel holder
Mounting location	ceiling
Width	500 mm
Length	500 mm
Height	500 mm
Diameter	ø 500 mm
Hinge length	1000 mm
mounting holes (diameter)	none
Installation wire (diameter)	none
Energy Class	D
Impact strength	IK06
Operating temperature	from 0°C to +30°C

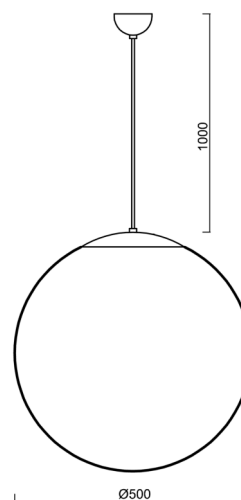


## Electric

Power consumption	41 W
Ingress Protection	IP40
Socket	LED modul
Battery type	NiCd
Emergency time	3 hours
terminal block	none
Automatic circuit breaker type B10A	25 pcs
Automatic circuit breaker type B16A	43 pcs
Automatic circuit breaker type C10A	29 pcs
Automatic circuit breaker type C16A	52 pcs

## Luminous

Lum. flux of luminaire	5870 lm
Lum. flux of light source	6670 lm
Lum. flux of light source in emergency mode	150 lm
Luminaire efficacy	143 lm/W
Temperature	3000 K
Rated life time LED L80/B10	100000 hours
CRI	Ra80
MacAdam	3
Blue light hazard	Risk group 0

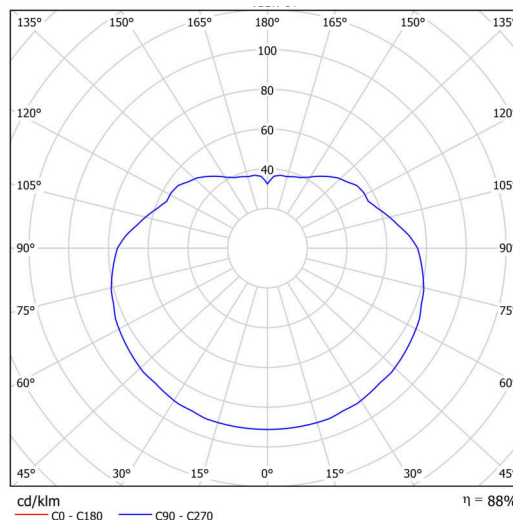

## TECHNICAL SHEET



Eulum data for calculation programs are available at  
[www.osmont.cz](http://www.osmont.cz).

### Logistic

EAN	8591728041533
Weight NTTO	3.8 Kg
Weight BTTO	5.3 Kg
Number of cartons	2 pcs
Package volume	0.148 m <sup>3</sup>
Package 1 width	0.52 m
Package 1 length	0.52 m
Package 1 height	0.53 m
Warranty*	60 months

\*The warranty for the batteries is valid for 12 months from the date of purchase.

### Additional assortment:

#### Lampshade

Product code	Name	Color	Description	Picture	Drawing
20604	PM4-M	white		