

## KRUGER P3 FOP


Soukromý: LED-1L20EMP700ZKN94/FOP3B/z5 NK3HST B 4K#

[WWW.OSMONT.CZ](http://WWW.OSMONT.CZ)

# KRUGER P3 FOP


Product code: KRU60790

Type: Soukromý: LED-1L20EMP700ZKN94/FOP3B/z5 NK3HST B 4K#



## Technical

|                              |  |
|------------------------------|--|
| Types of luminaires          | Emergency combined                             |
| Mounting type                | Suspended - rod                                |
| Base material                | steel  |
| Shade material               | Plastic opal prismatic (FOP) with metal collar |
| Shade color                  | white  |
| Holding the shade            | folding system                                 |
| Mounting location            | ceiling  |
| Width                        | 490 mm   |
| Length                       | 490 mm   |
| Height                       | 80 mm  |
| mounting holes (diameter)    | 2xØ5mm   |
| Installation wire (diameter) | 2xØ16mm  |
| Impact strength              | IKxx   |

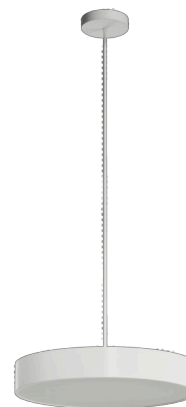



## Electric

|                    |                      |
|--------------------|----------------------|
| Power consumption  | 32 W                 |
| Ingress Protection | IP40                 |
| Socket             | LED modul            |
| Battery type       | LiFePO4              |
| Emergency time     | 3 hours              |
| terminal block     | screw terminal block |

## Luminous

|   |              |
|---|--------------|
| Lum. flux of luminaire                      | 3390 lm      |
| Lum. flux of light source                   | 5560 lm      |
| Lum. flux of light source in emergency mode | 200 lm       |
| Temperature                                 | 4000 K       |
| Rated life time LED L80/B10                 | 100000 hours |
| CRI   | Ra80         |
| MacAdam                                     | 3            |
| Blue light hazard                           | Risk group 0 |

Eulum data for calculation programs are available at [www.osmont.cz](http://www.osmont.cz).

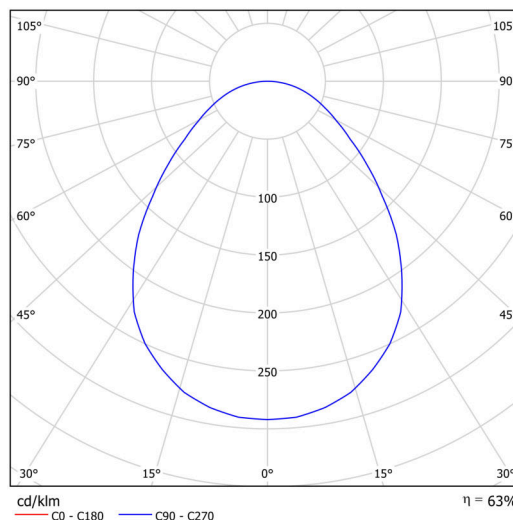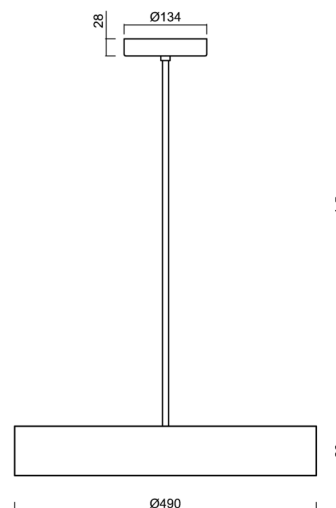

# TECHNICAL SHEET



## Logistic

|                   |               |
|-------------------|---------------|
| EAN               | 8591728158484 |
| Number of cartons | 1 pcs         |

*\*The warranty for the batteries is valid for 12 months from the date of purchase.*

## Installation dimensions:

