

## KRUGER P3 FOP

Private: LED-1L20EMP1050ZKN94/FOP3B/z5 NK3HST B 4K#

[WWW.OSMONT.CZ](http://WWW.OSMONT.CZ)

# KRUGER P3 FOP


Product code: KRU60791

Type: Private: LED-1L20EMP1050ZKN94/FOP3B/z5 NK3HST B 4K#



## Technical

Types of luminaires	Emergency combined
Mounting type	Suspended - rod
Base material	steel
Shade material	Plastic opal prismatic (FOP) with metal collar
Shade color	white
Holding the shade	folding system
Mounting location	ceiling
Width	490 mm
Length	490 mm
Height	80 mm
mounting holes (diameter)	2xØ5mm
Installation wire (diameter)	2xØ16mm
Impact strength	IKxx

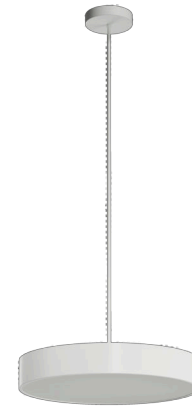



## Electric

Power consumption	48 W
Ingress Protection	IP40
Socket	LED modul
Battery type	LiFePO4
Emergency time	3 hours
terminal block	screw terminal block

## Luminous

Lum. flux of luminaire	4920 lm
Lum. flux of light source	8070 lm
Lum. flux of light source in emergency mode	200 lm
Temperature	4000 K
Rated life time LED L80/B10	100000 hours
CRI	Ra80
MacAdam	3
Blue light hazard	Risk group 0

Eulum data for calculation programs are available at [www.osmont.cz](http://www.osmont.cz).

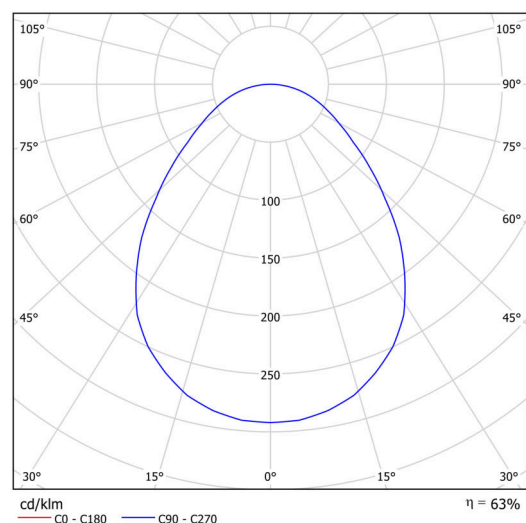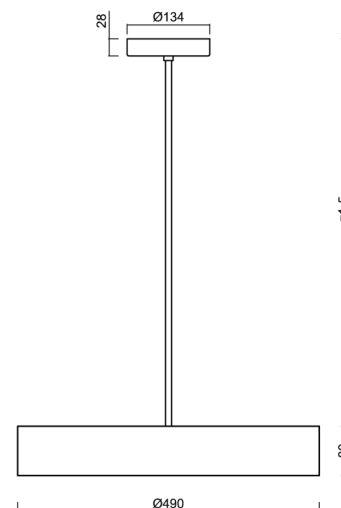

# TECHNICAL SHEET



## Logistic

EAN	8591728158491
Number of cartons	1 pcs

*\*The warranty for the batteries is valid for 12 months from the date of purchase.*

## Installation dimensions:

