



MATAR 2

LED-1L78-1L79EMP550PA09/PC72 C 4K##

WWW.OSMONT.CZ

MATAR 2

Product code: MAT60626


Type: LED-1L78-1L79EMP550PA09/PC72 C 4K##

Short description of the luminaire: Black colour | ceiling or wall LED light ON/OFF | multipower driver | opal polycarbonate shade (PC)



Technical data

| | |
|---------------------------|---------------------|
| Types of luminaires | Classic on/off |
| Mounting type | surface mounted |
| Base material | aluminium |
| Shade material | opal polycarbonate |
| Base color | black Ral9005 |
| Shade color | white |
| Holding the shade | spring |
| Mounting location | ceiling/wall |
| Width | 905 mm |
| Length | 58 mm |
| Height | 46 mm |
| mounting holes (diameter) | 2xØ5mm |
| Cable entrance | 2xØ16mm |
| Energy Class | D |
| Impact strength | IK10 |
| Operating temperature | from -20°C to +30°C |

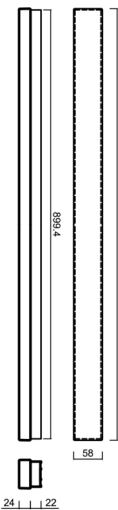


Electrical data

| | |
|--------------------|---------------------|
| Power consumption | 21 W |
| Ingress Protection | IP44 |
| Socket | LED modul |
| terminal block | snap terminal block |

Luminous data



| | |
|-----------------------------|--------------|
| Lum. flux of luminaire | 2450 lm |
| Lum. flux of light source | 3450 lm |
| Chromaticity temperature | 4000 K |
| Rated life time LED L80/B10 | 100000 hours |
| CRI | Ra80 |
| MacAdam | 3 |
| Blue light hazard | Risk group 0 |

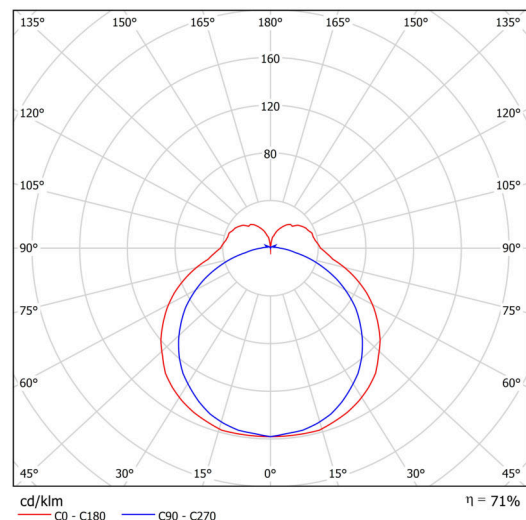Eulum data for calculation programs are available at www.osmont.cz.



Additional assortment:

Lampshade

| Product code | Name | Color | Picture | Drawing |
|--------------|------|-------|---|---|
| 20609 | PC72 | white |  |  |