

## MATAR 2

---

LED-1L78-1L79E250PA09/PC72 C DALI 4K##

[WWW.OSMONT.CZ](http://WWW.OSMONT.CZ)

# MATAR 2

Product code: MAT71543


Type: LED-1L78-1L79E250PA09/PC72 C DALI 4K##

Short description of the luminaire: Black colour | ceiling or wall LED light DALI | opal polycarbonate shade (PC)



## Technical

Types of luminaires	Dimmable
Mounting type	surface mounted
Base material	aluminium
Shade material	opal polycarbonate
Base color	black Ral9005
Shade color	white
Holding the shade	spring
Mounting location	ceiling/wall
Width	900 mm
Length	60 mm
Height	46 mm
mounting holes (diameter)	2xØ5mm
Cable entrance	2xØ16mm
Energy Class	D
Impact strength	IK10
Operating temperature	from -20°C to +30°C




## Electric

Power consumption	14 W
Ingress Protection	IP44
Socket	LED modul
terminal block	snap terminal block
Automatic circuit breaker type B10A	31 pcs
Automatic circuit breaker type B16A	50 pcs
Automatic circuit breaker type C10A	52 pcs
Automatic circuit breaker type C16A	85 pcs

## Luminous

Lum. flux of luminaire	1700 lm
Lum. flux of light source	2400 lm
Luminaire efficacy	121 lm/W
Temperature	4000 K
Rated life time LED L80/B10	100000 hours
CRI	Ra80
MacAdam	3
Blue light hazard	Risk group 0

Eulum data for calculation programs are available at [www.osmont.cz](http://www.osmont.cz).

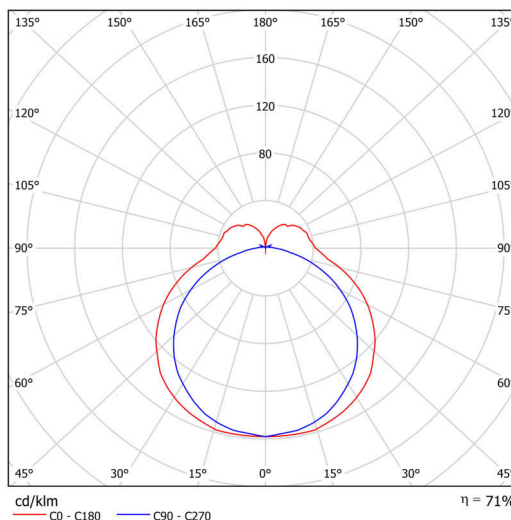

# TECHNICAL SHEET




## Logistic

EAN	8591728141110
Weight NTTO	1.05 Kg
Weight BTTO	1.25 Kg
Warranty*	60 months

*\*The warranty for the batteries is valid for 12 months from the date of purchase.*

## Installation dimensions:

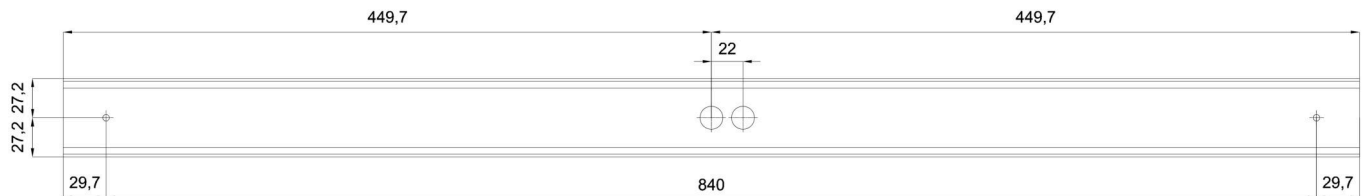

Additional assortment:

Base for surface mounting

Product code	Name	Color	Description	Picture	Drawing
33519	příslušenství pro boční montáž MATAR 1,2,3 - B (2x krytka s otvorem, 2x průchodka)	white Ral9003			
33520	příslušenství pro boční montáž MATAR 1,2,3 - C (2x krytka s otvorem, 2x průchodka)	black Ral9005	příslušenství		

Lampshade

Product code	Name	Color	Description	Picture	Drawing
20609	PC72	white	příslušenství	