



## MATAR 3

---

LED-2L79EMP700PA12/PC73/NK1W B 3K##


[WWW.OSMONT.CZ](http://WWW.OSMONT.CZ)

# MATAR 3

Product code: MAT60005


Type: LED-2L79EMP700PA12/PC73/NK1W B 3K##

Short description of the luminaire: White color | surface-mounted LED light | emergency combi unit | multipower function | polycarbonate shade



## Technical

Types of luminaires	Emergency combined
Mounting type	surface mounted
Base material	aluminium
Shade material	opal polycarbonate
Base color	white Ral9003
Shade color	white
Holding the shade	spring
Mounting location	ceiling/wall
Width	1200 mm
Length	60 mm
Height	46 mm
mounting holes (diameter)	2xØ5mm
Installation wire (diameter)	2xØ16mm
Energy Class	D
Impact strength	IK10
Operating temperature	from 0°C to +30°C




## Electric

Power consumption	26 W
Ingress Protection	IP44
Socket	LED modul
Battery type	NiCd
Emergency time	3 hours
terminal block	snap terminal block
Automatic circuit breaker type B10A	26 pcs
Automatic circuit breaker type B16A	40 pcs
Automatic circuit breaker type C10A	30 pcs
Automatic circuit breaker type C16A	48 pcs

## Luminous

Lum. flux of luminaire	2990 lm
Lum. flux of light source	4210 lm
Luminaire efficacy	115 lm/W
Temperature	3000 K
Rated life time LED L80/B10	100000 hours
CRI	Ra80
MacAdam	3
Blue light hazard	Risk group 0

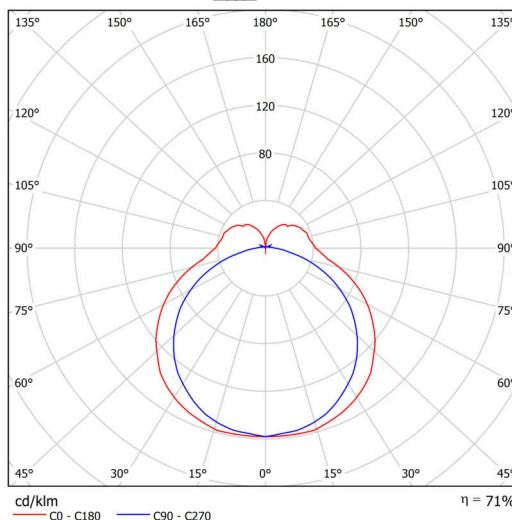

Eulum data for calculation programs are available at [www.osmont.cz](http://www.osmont.cz).

## TECHNICAL SHEET



### Multipower

Possibility of output adjustment by the user (DIP switch on the current source).


I [mA]	700	600	500	400	
[%]	100	86	71	57	

### Logistic

EAN	8591728087265
Weight NTTO	1.3 Kg
Weight BTTO	1.46 Kg
Warranty*	60 months

*\*The warranty for the batteries is valid for 12 months from the date of purchase.*

### Installation dimensions:

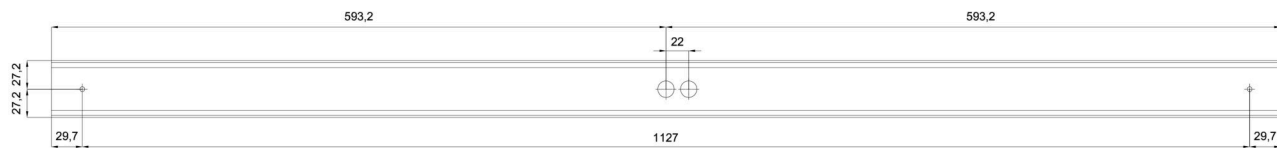

## Additional assortment:

## Lampshade

Product code	Name	Color	Description	Picture	Drawing
20615	PC73	white		