



## MATAR 3

---

LED-2L79EMP700PA12/PC73 NK3HST C 3K##


[WWW.OSMONT.CZ](http://WWW.OSMONT.CZ)

# MATAR 3

Product code: MAT71049


Type: LED-2L79EMP700PA12/PC73 NK3HST C 3K##

Short description of the luminaire: Black colour | ceiling or wall LED light with emergency backup combined ( with Self-test) | multipower driver | opal polycarbonate shade (PC)|



## Technical

Types of luminaires	Emergency combined SELFTEST
Mounting type	surface mounted
Base material	aluminium
Shade material	opal polycarbonate
Base color	black Ral9005
Shade color	white
Holding the shade	spring
Mounting location	ceiling/wall
Width	1200 mm
Length	60 mm
Height	46 mm
mounting holes (diameter)	2xØ5mm
Cable entrance	2xØ16mm
Energy Class	D
Impact strength	IK10
Operating temperature	from -20°C to +30°C




## Electric

Power consumption	26 W
Ingress Protection	IP44
Socket	LED modul
Battery type	LiFePO4
Emergency time	3 hours
SELFTEST	yes
terminal block	snap terminal block

## Luminous

Lum. flux of luminaire	2990 lm
Lum. flux of light source	4210 lm
Lum. flux of light source in emergency mode	200 lm
Temperature	3000 K
Rated life time LED L80/B10	100000 hours
CRI	Ra80
MacAdam	3
Blue light hazard	Risk group 0

Eulum data for calculation programs are available at [www.osmont.cz](http://www.osmont.cz).

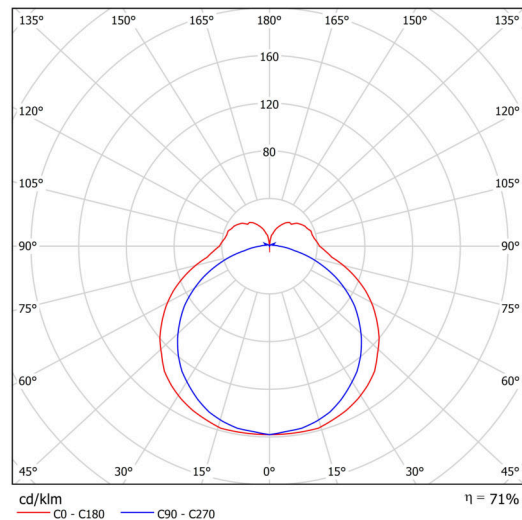

# TECHNICAL SHEET




## Logistic

EAN	8591728158934
Weight NTTO	1.3 Kg
Weight BTTO	1.46 Kg
Warranty*	60 months


*\*The warranty for the batteries is valid for 12 months from the date of purchase.*

## Installation dimensions:

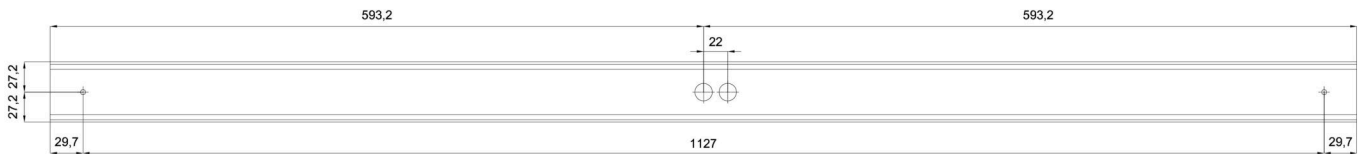

Additional assortment:

Base for surface mounting

Product code	Name	Color	Description	Picture	Drawing
33519	příslušenství pro boční montáž MATAR 1,2,3 - B (2x krytka s otvorem, 2x průchodka)	white Ral9003			
33520	příslušenství pro boční montáž MATAR 1,2,3 - C (2x krytka s otvorem, 2x průchodka)	black Ral9005	příslušenství		

Lampshade

Product code	Name	Color	Description	Picture	Drawing
20615	PC73	white	příslušenství	