



## STYX 3

---

LED-5L06E450BD1/194 C 4K#

[WWW.OSMONT.CZ](http://WWW.OSMONT.CZ)

# STYX 3

Product code: STY61732


Type: LED-5L06E450BD1/194 C 4K#

Short description of the luminaire: Black surface-mounted LED light DALI with TRIPLEX OPAL glass shade.



## Technical

|                              |                                |
|------------------------------|--------------------------------|
| Types of luminaires          | Classic on/off                 |
| Mounting type                | surface mounted                |
| Base material                | polycarbonate                  |
| Shade material               | three-layer glass TRIPLEX OPAL |
| Base color                   | black Ral9005                  |
| Shade color                  | white                          |
| Holding the shade            | bayonet                        |
| Mounting location            | ceiling/wall                   |
| Width                        | 300 mm                         |
| Length                       | 300 mm                         |
| Height                       | 295 mm                         |
| Diameter                     | ø 300 mm                       |
| mounting holes (diameter)    | 4xø5mm                         |
| Installation wire (diameter) | 2xø16mm                        |
| Energy Class                 | D                              |
| Impact strength              | IK01                           |
| Operating temperature        | from -20°C to +30°C            |

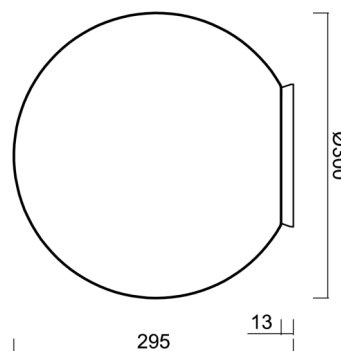


## Electric

|                                     |                      |
|-------------------------------------|----------------------|
| Power consumption                   | 20 W                 |
| Ingress Protection                  | IP65                 |
| Socket                              | LED modul            |
| terminal block                      | screw terminal block |
| Automatic circuit breaker type B10A | 31 pcs               |
| Automatic circuit breaker type B16A | 50 pcs               |
| Automatic circuit breaker type C10A | 52 pcs               |
| Automatic circuit breaker type C16A | 85 pcs               |

## Luminous

|                             |              |
|-----------------------------|--------------|
| Lum. flux of luminaire      | 3090 lm      |
| Lum. flux of light source   | 3510 lm      |
| Luminaire efficacy          | 154 lm/W     |
| Temperature                 | 4000 K       |
| Rated life time LED L80/B10 | 100000 hours |
| CRI                         | Ra80         |
| MacAdam                     | 3            |
| Blue light hazard           | Risk group 0 |

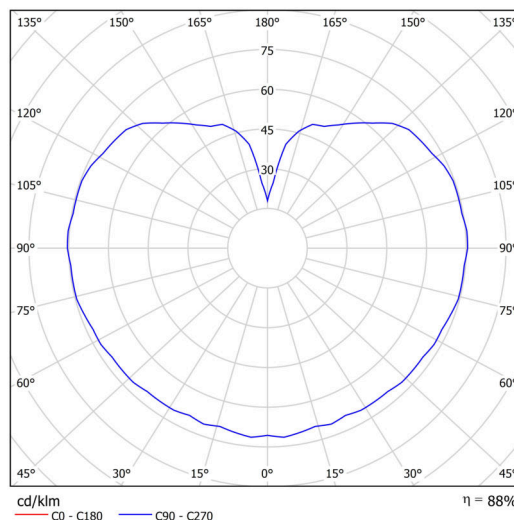

Eulum data for calculation programs are available at [www.osmont.cz](http://www.osmont.cz).

Logistic

|                   |                      |
|-------------------|----------------------|
| EAN               | 8591728137076        |
| Weight NTTO       | 2.7 Kg               |
| Weight BTTO       | 3 Kg                 |
| Number of cartons | 1 pcs                |
| Package volume    | 0.029 m <sup>3</sup> |
| Package 1 width   | 0.31 m               |
| Package 1 length  | 0.31 m               |
| Package 1 height  | 0.305 m              |
| Warranty*         | 60 months            |

\*The warranty for the batteries is valid for 12 months from the date of purchase.

Installation dimensions:




Additional assortment:

Base for surface mounting

| Product code | Name       | Color            | Description | Picture  | Drawing   |
|--------------|------------|------------------|-------------|--|---|
| 33521        | BD1/BP 2-1 | white<br>Ral9003 |             |  |  |

Lampshade

| Product code | Name | Color | Description | Picture   | Drawing |
|--------------|------|-------|-------------|---|---------|
| 20094        | 194  | white |             |  |         |