



## SUBRA 3

---

LED-18L71E1050N2/PM831 C DALI 3K##

[WWW.OSMONT.CZ](http://WWW.OSMONT.CZ)

# SUBRA 3

Product code: SUB60045

Type: LED-18L71E1050N2/PM831 C DALI 3K##

Short description of the luminaire: Black colour | ceiling or wall LED light DALI | matt PMMA shade|



## Technical data

Types of luminaires	Dimmable
Mounting type	surface mounted
Base material	steel
Shade material	opal polymethyl methacrylate
Base color	black Ral9005
Shade color	white
Holding the shade	screws
Mounting location	ceiling
Width	50 mm
Length	80 mm
Height	1505 mm
mounting holes (diameter)	2xØ5mm
Cable entrance	2xØ16mm
Energy Class	C
Impact strength	IK04
Operating temperature	from -20°C to +30°C



## Electrical data

Power consumption	37 W
Ingress Protection	IP20
Socket	LED modul
terminal block	snap terminal block

## Luminous data

Lum. flux of luminaire	4940 lm
Lum. flux of light source	6330 lm
Chromaticity temperature	3000 K
Rated life time LED L80/B10	100000 hours
CRI	Ra80
MacAdam	3
Blue light hazard	Risk group 0

Eulum data for calculation programs are available at [www.osmont.cz](http://www.osmont.cz).

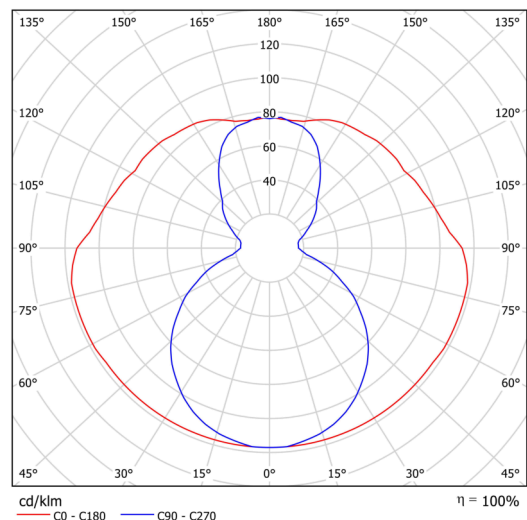

## TECHNICAL SHEET



### Logistical data

EAN	8591728232467
Number of cartons	1 pcs
Warranty*	60 months

*\*The warranty for the batteries is valid for 36 months from the date of purchase.*

### Installation dimensions:



## Additional assortment:

## Lampshade

Product code	Name	Color	Picture	Drawing
20736	PM831 (pr.50/1505mm)	white	