



## TILIA 3

---

LED-4L36E400NU4/PC34 DALI 4K##

[WWW.OSMONT.CZ](http://WWW.OSMONT.CZ)

# TILIA 3

Product code: TIL56872


Type: LED-4L36E400NU4/PC34 DALI 4K##

Short description of the luminaire: White surface-mounted LED light DALI and polycarbonate shade.



## Technical

Types of luminaires	Dimmable
Mounting type	surface mounted
Base material	steel
Shade material	opal polycarbonate
Base color	white Ra9003
Shade color	white
Holding the shade	folding system
Mounting location	ceiling/wall
Width	550 mm
Length	550 mm
Height	70 mm
mounting holes (diameter)	4xØ5mm
Installation wire (diameter)	2xØ16mm
Energy Class	D
Impact strength	IK10
Operating temperature	from -20°C to +30°C

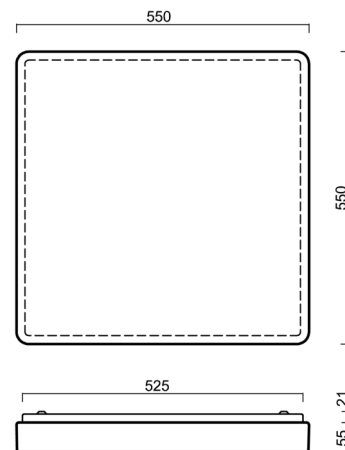


## Electric

Power consumption	40 W
Ingress Protection	IP54
Socket	LED modul
terminal block	snap terminal block
Automatic circuit breaker type B10A	9 pcs
Automatic circuit breaker type B16A	14 pcs
Automatic circuit breaker type C10A	15 pcs
Automatic circuit breaker type C16A	23 pcs

## Luminous

Lum. flux of luminaire	4550 lm
Lum. flux of light source	6790 lm
Luminaire efficacy	113 lm/W
Temperature	4000 K
Rated life time LED L80/B10	100000 hours
CRI	Ra80
MacAdam	3
Blue light hazard	Risk group 0

Eulum data for calculation programs are available at [www.osmont.cz](http://www.osmont.cz).

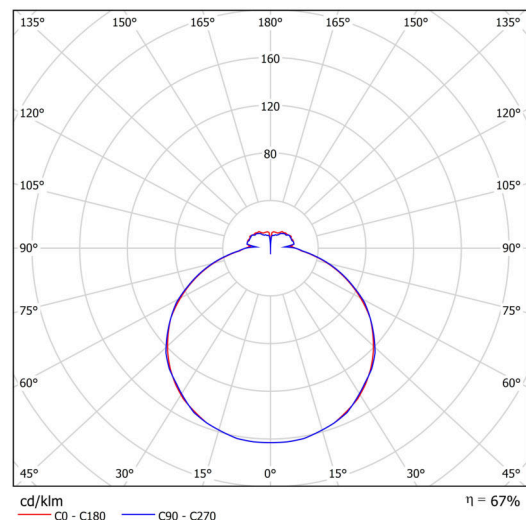

# TECHNICAL SHEET




## Logistic

EAN	8591728128425
Weight NTTO	3.6 Kg
Weight BTTO	4.3 Kg
Number of cartons	1 pcs
Package volume	0.031 m <sup>3</sup>
Package 1 width	0.56 m
Package 1 length	0.55 m
Package 1 height	0.1 m
Warranty*	60 months

*\*The warranty for the batteries is valid for 12 months from the date of purchase.*

## Installation dimensions:

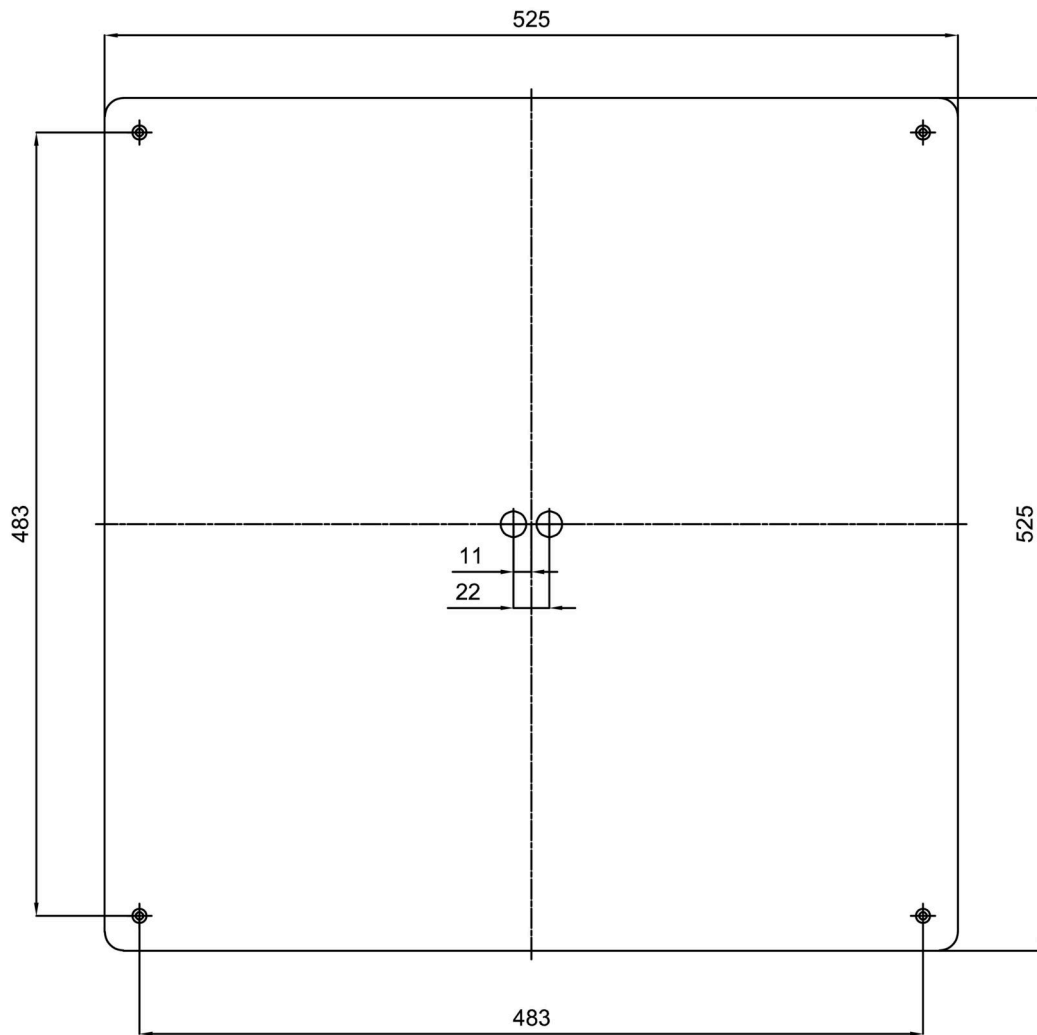

## Additional assortment:

## Lampshade

Product code	Name	Color	Description	Picture	Drawing
20546	PC34	white		