



## TITAN 4

---

LED-6L51E1050KN10/PM10 DALI 4K##


[WWW.OSMONT.CZ](http://WWW.OSMONT.CZ)

# TITAN 4

Product code: TIT73501


Type: LED-6L51E1050KN10/PM10 DALI 4K##

Short description of the luminaire: White color | surface-mounted LED light | dimmable DALI | PMMA shade



## Technical

Types of luminaires	Dimmable
Mounting type	surface mounted
Base material	steel
Shade material	opal polymethyl methacrylate
Base color	white Ra9003
Shade color	white
Holding the shade	folding system
Mounting location	ceiling/wall
Width	650 mm
Length	650 mm
Height	150 mm
Diameter	ø 650 mm
mounting holes (diameter)	3xø5mm
Installation wire (diameter)	2xø16mm
Energy Class	D
Impact strength	IK04
Operating temperature	from -20°C to +30°C

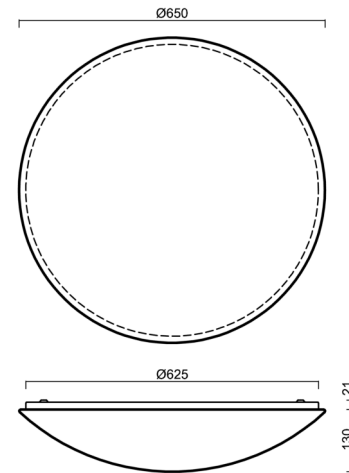


## Electric

Power consumption	100 W
Ingress Protection	IP54
Socket	LED modul
terminal block	snap terminal block
Automatic circuit breaker type B10A	6 pcs
Automatic circuit breaker type B16A	11 pcs
Automatic circuit breaker type C10A	10 pcs
Automatic circuit breaker type C16A	18 pcs

## Luminous

Lum. flux of luminaire	10430 lm
Lum. flux of light source	15810 lm
Luminaire efficacy	104 lm/W
Temperature	4000 K
Rated life time LED L80/B10	100000 hours
CRI	Ra80
MacAdam	3
Blue light hazard	Risk group 0

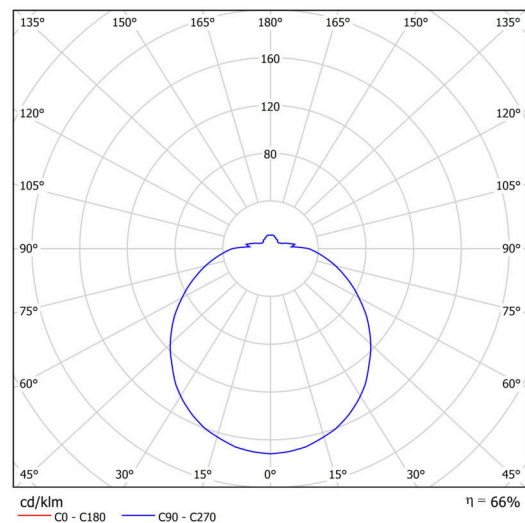


Eulum data for calculation programs are available at [www.osmont.cz](http://www.osmont.cz).

Logistic

EAN	8591728133504
Weight NTTO	5.4 Kg
Weight BTTO	6.8 Kg
Number of cartons	1 pcs
Package volume	0.08 m <sup>3</sup>
Package 1 width	0.68 m
Package 1 length	0.69 m
Package 1 height	0.17 m
Warranty*	60 months

\*The warranty for the batteries is valid for 12 months from the date of purchase.

Installation dimensions:

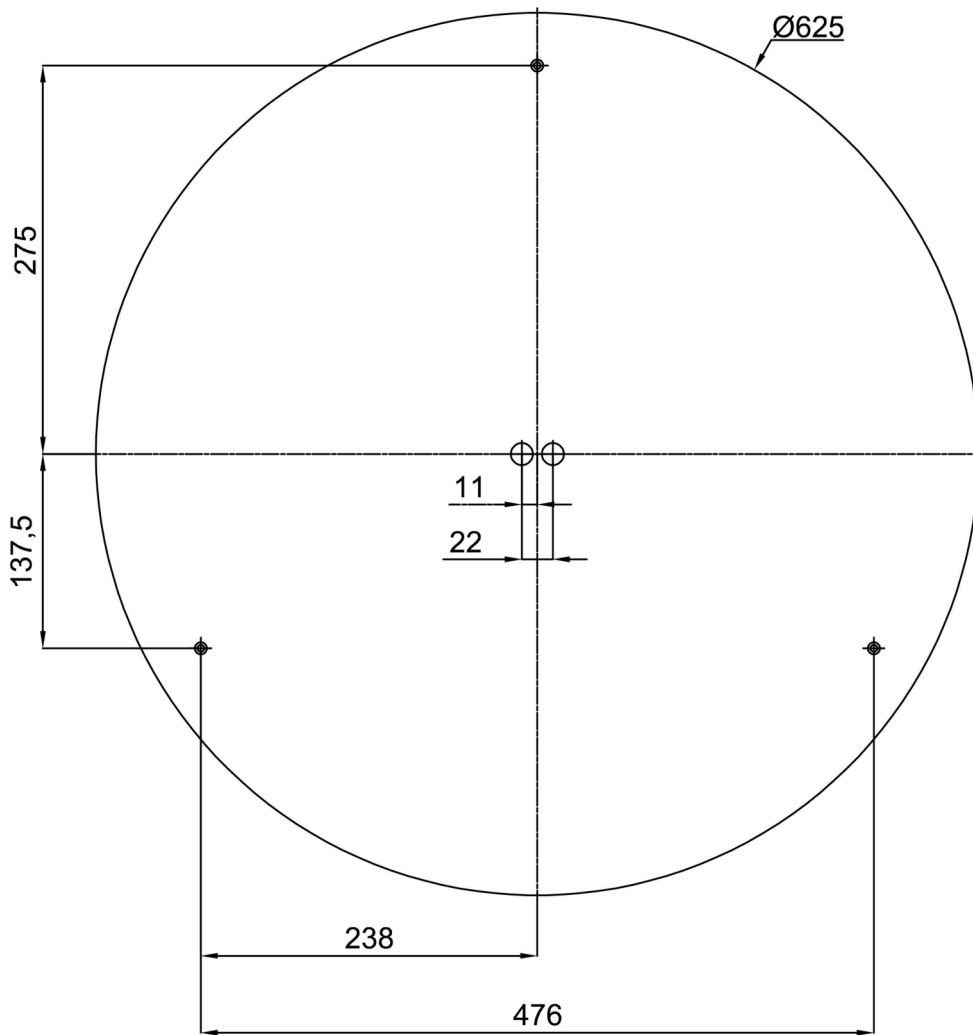

## Additional assortment:

## Lampshade

Product code	Name	Color	Description	Picture	Drawing
20515	PM10	white		