



ZETA 2 UP/DOWN

LED-3L651E950/350K2H/FP92 C 2/1 3K##

WWW.OSMONT.CZ

ZETA 2 UP/DOWN

Product code: ZET60126


Type: LED-3L651E950/350K2H/FP92 C 2/1 3K##

Short description of the luminaire: Black colour | ceiling or wall LED light ON/OFF | two-circuit connection| direct and indirect lighting | matt PMMA shade



Technical data

| | |
|---------------------------|------------------------------|
| Types of luminaires | Classic on/off |
| Mounting type | surface mounted |
| Base material | steel |
| Shade material | opal polymethyl methacrylate |
| Base color | black Ral9005 |
| Shade color | white |
| Mounting location | ceiling/wall |
| Width | 600 mm |
| Length | 600 mm |
| Height | 105 mm |
| Diameter | ø 600 mm |
| mounting holes (diameter) | 3xø5mm |
| Cable entrance | 2xø16mm |
| Energy Class | D |
| Operating temperature | from -20°C to +30°C |

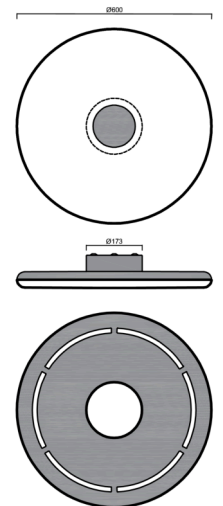


Electrical data

| | |
|--------------------|---------------------|
| Power consumption | 38+14 W |
| Ingress Protection | IP40 |
| Socket | LED modul |
| terminal block | snap terminal block |

Luminous data

| | |
|-----------------------------|--------------|
| Lum. flux of luminaire | 4500+1550 lm |
| Lum. flux of light source | 6250+2280 lm |
| Chromaticity temperature | 3000 K |
| Rated life time LED L80/B10 | 100000 hours |
| CRI | Ra80 |
| MacAdam | 3 |
| Blue light hazard | Risk group 0 |

Eulum data for calculation programs are available at www.osmont.cz.

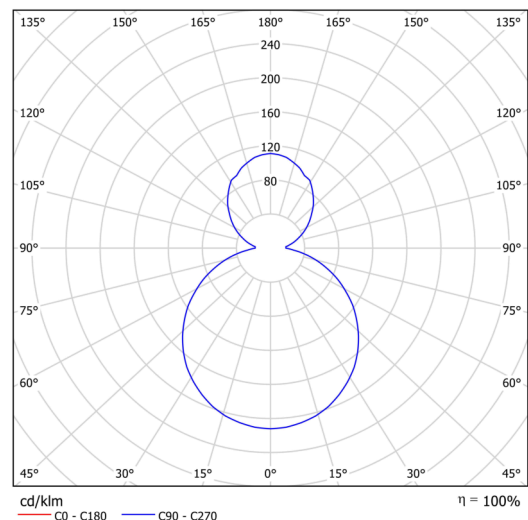

TECHNICAL SHEET




Logistical data

| | |
|-------------------|---------------|
| EAN | 8591728233617 |
| Weight NTTO | 5.5 Kg |
| Weight BTTO | 6.3 Kg |
| Number of cartons | 1 pcs |
| Warranty* | 60 months |

*The warranty for the batteries is valid for 36 months from the date of purchase.

Installation dimensions:

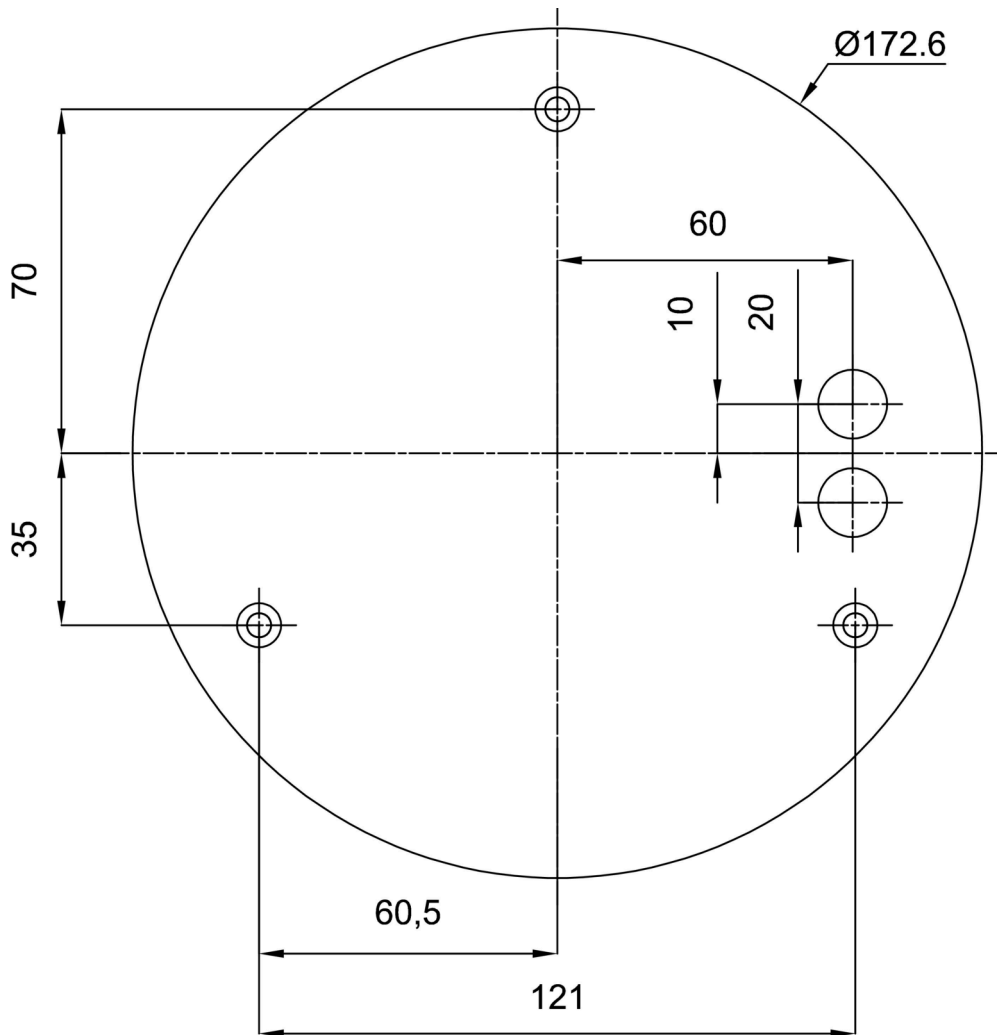

Additional assortment:

Lampshade

| Product code | Name | Color | Picture | Drawing |
|--------------|------|-------|---|---------|
| 20669 | PM92 | white |  | |