ASTRA L

LED-5L06E600ZL11/095/L100 MS DALI 4K#

ASTRA L

Product code: AST60926

Type: LED-5L06E600ZL11/095/L100 MS DALI 4K#

Short description of the luminaire: Brass polished | pendant LED light DALI | TRIPLEX OPAL hand blown glass shade| steel wire pendant (with supply cable) 100 cm |



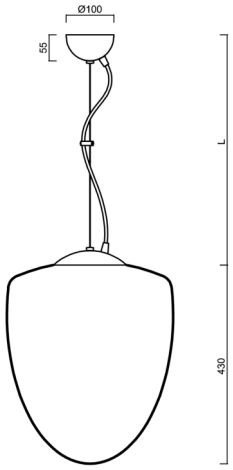

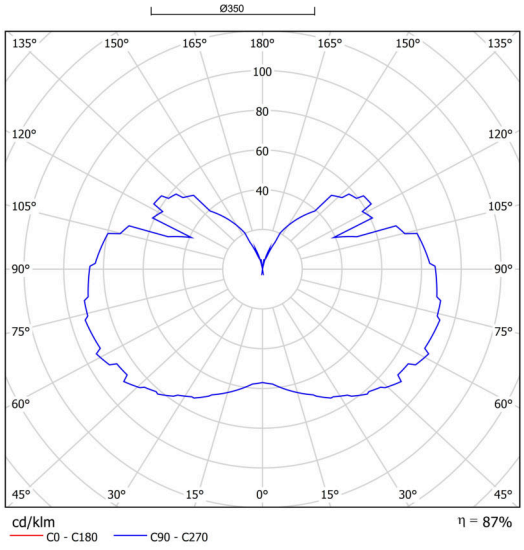

Technical data

Types of luminaires	Dimmable
Mounting type	Suspended - wire
Base material	brass
Shade material	three-layer glass TRIPLEX OPAL
Base color	polished brass
Shade color	white
Holding the shade	steel holder
Mounting location	ceiling
Width	350 mm
Length	350 mm
Height	430 mm
Diameter	ø 350 mm
Suspension length	1000 mm
mounting holes (diameter)	none
Energy Class	D
Impact strength	IK01
Operating temperature	from -20°C to +30°C

Electrical data

Power consumption	27 W
Ingress Protection	IP40
Socket	LED modul
terminal block	none
Automatic circuit breaker type B10A	31 pcs
Automatic circuit breaker type B16A	50 pcs
Automatic circuit breaker type C10A	52 pcs
Automatic circuit breaker type C16A	85 pcs
Switching current	5 A / 50 µsec
Number of LED drivers	1

Luminous data

Lum. flux of luminaire	4070 lm
Lum. flux of light source	4630 lm
Luminaire efficacy	150 lm/W
Chromaticity temperature	4000 K
Rated life time LED L80/B10	100000 hours
CRI	Ra80
MacAdam	3
Blue light hazard	Risk group 0

OSMONT, s.r.o.
HYBRÁLEC 129,
586 01 JIHLAVA, CZ

www.osmont.cz
osmont@osmont.cz
(+420) 567 210 023

Eulum data for calculation programs are available at www.osmont.cz.

Logistical data

EAN	8591728065973
Weight NTTO	6.15 Kg
Weight BTTO	6.9 Kg
Number of cartons	2 pcs
Package volume	0.084 m^3
Package 1 width	0.41 m
Package 1 length	0.41 m
Package 1 height	0.41 m
Warranty*	60 months

**The warranty for the batteries is valid for 36 months from the date of purchase.*

Additional assortment:

Lampshade

Product code	Name	Color	Picture	Drawing
20048	095	white		