



ELSA 2

LED-1L14E500BT13/025 NK3H 3K#


WWW.OSMONT.CZ

ELSA 2

Product code: ELS59952



Type: LED-1L14E500BT13/025 NK3H 3K#

Short description of the luminaire: White color| surface-mounted LED light| emergency combi unit| TRIPLEX OPAL glass shade with matt surface|



Technical data

Types of luminaires	Emergency combined
Mounting type	surface mounted
Base material	steel
Shade material	three-layer glass TRIPLEX OPAL
Base color	white Ral9003
Shade color	white
Holding the shade	bayonet
Mounting location	ceiling/wall
Width	300 mm
Length	300 mm
Height	86 mm
Diameter	ø 300 mm
mounting holes (diameter)	3xø5mm
Cable entrance	2xø16mm
Energy Class	D
Impact strength	IK01
Operating temperature	from 0°C to +30°C




Electrical data

Power consumption	13 W
Ingress Protection	IP44
Socket	LED modul
Battery type	LiFePO4
Emergency time	3 hours
terminal block	snap terminal block
Automatic circuit breaker type B10A	16 pcs
Automatic circuit breaker type B16A	27 pcs
Automatic circuit breaker type C10A	25 pcs
Automatic circuit breaker type C16A	38 pcs

Luminous data

Lum. flux of luminaire	1460 lm
Lum. flux of light source	2000 lm
Lum. flux of light source in emergency mode	200 lm
Luminaire efficacy	112 lm/W
Chromaticity temperature	3000 K
Rated life time LED L80/B10	100000 hours
CRI	Ra80
MacAdam	3

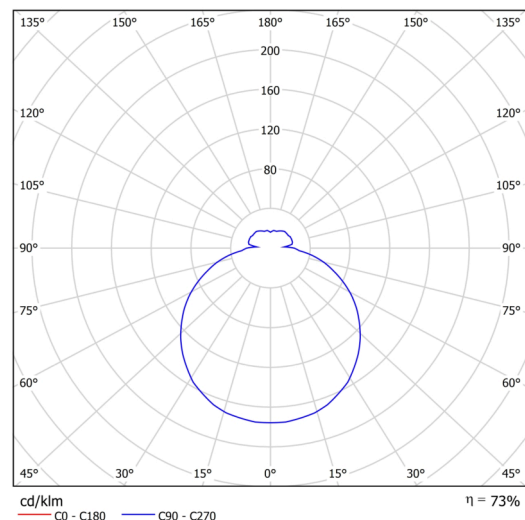

TECHNICAL SHEET



Blue light hazard	Risk group 0
-------------------	--------------

Eulum data for calculation programs are available at www.osmont.cz.

Logistical data

EAN	8591728175658
Weight NTTO	2.1 Kg
Weight BTTO	2.4 Kg
Number of cartons	1 pcs
Package volume	0.01 m ³
Package 1 width	0.32 m
Package 1 length	0.31 m
Package 1 height	0.12 m
Warranty*	60 months

*The warranty for the batteries is valid for 36 months from the date of purchase.

Installation dimensions:

