ELSA 3 IP

LED-1L15E500BD14/027 HF CORR 4K#

WWW.OSMONT.CZ

ELSA 3 IP

Product code: ELS70911

Type: LED-1L15E500BD14/027 HF CORR 4K#

Short description of the luminaire: White colour | ceiling or wall LED light with CORRIDOR function (DALI+HF sensor) | TRIPLEX OPAL hand blown glass shade|

Technical data

Types of luminaires	Corridor
Mounting type	surface mounted
Base material	polypropylene composite
Shade material	three-layer glass TRIPLEX OPAL
Base color	white Ral9003
Shade color	white
Holding the shade	bayonet
Mounting location	ceiling/wall
Width	360 mm
Length	360 mm
Height	94 mm
Diameter	ø 360 mm
mounting holes (diameter)	3xØ5mm
Cable entrance	2xØ16mm
Energy Class	D
Impact strength	IK01
Operating temperature	from -20°C to +30°C

Electrical data

Power consumption	19 W
Ingress Protection	IP65
Socket	LED modul
Sensor	HF
terminal block	snap terminal block
Automatic circuit breaker type B10A	18 pcs
Automatic circuit breaker type B16A	32 pcs
Automatic circuit breaker type C10A	30 pcs
Automatic circuit breaker type C16A	53 pcs
Switching current	25 A / 140 µsec
Number of LED drivers	1

Luminous data

Lum. flux of luminaire	2190 lm
Lum. flux of light source	3130 lm
Luminaire efficacy	115 lm/W
Chromaticity temperature	4000 K
Rated life time LED L80/B10	100000 hours
CRI	Ra80
MacAdam	3
Blue light hazard	Risk group 0

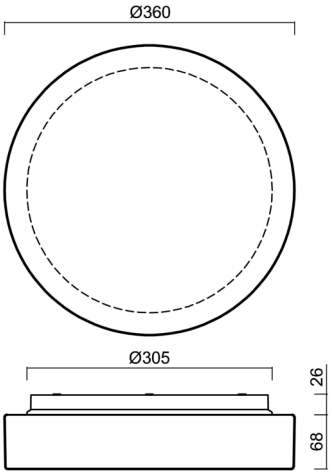

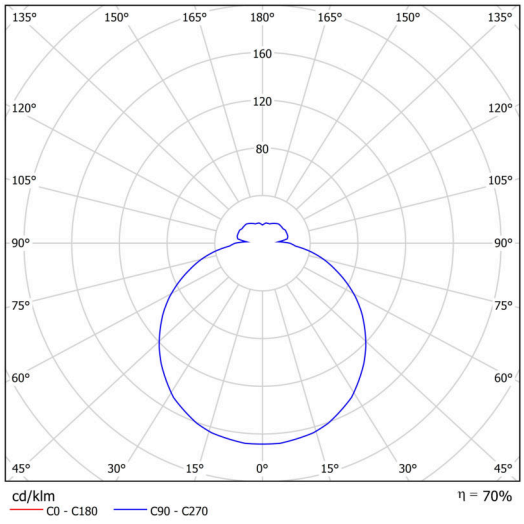

OSMONT, s.r.o.
HYBRÁLEC 129,
586 01 JIHLAVA, CZ

www.osmont.cz
osmont@osmont.cz
(+420) 567 210 023

Eulum data for calculation programs are available at www.osmont.cz.

Logistical data

EAN	8591728097738
Weight NTTO	2.85 Kg
Weight BTTO	3.2 Kg
Number of cartons	1 pcs
Package volume	0.018 m^3
Package 1 width	0.37 m
Package 1 length	0.37 m
Package 1 height	0.13 m
Warranty*	60 months

**The warranty for the batteries is valid for 36 months from the date of purchase.*

Installation dimensions:

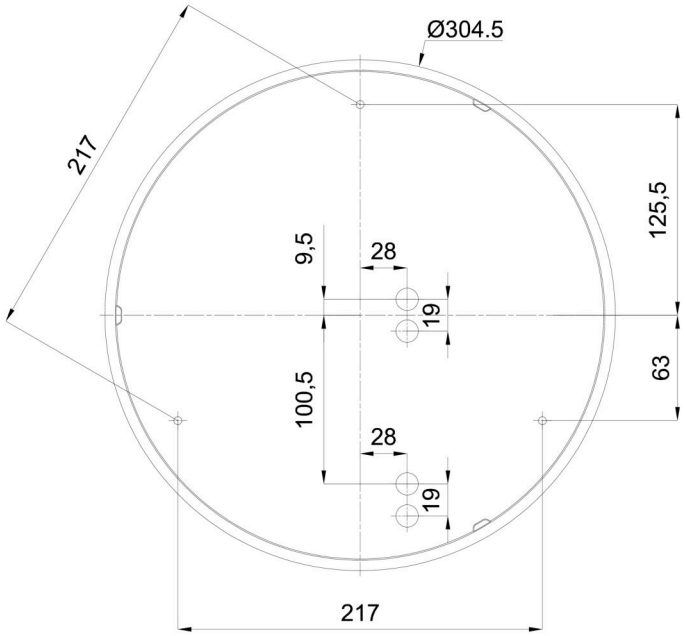

Additional assortment:

Base for surface mounting

Product code	Name	Color	Picture	Drawing
33516	B14/BP 2-1 B	white Ral9003		

Lampshade

Product code	Name	Color	Picture	Drawing
20082	027	white		