ERIS C3

LED-1L16E700K88/413C HF CORR 3K#

WWW.OSMONT.CZ

ERIS C3

Product code: ERI67045

Type: LED-1L16E700K88/413C HF CORR 3K#

Short description of the luminaire: White colour | ceiling or wall LED light with CORRIDOR function (DALI+HF sensor) | TRIPLEX OPAL hand blown glass shade with black decorative stripe|

Technical data

Types of luminaires	Corridor
Mounting type	surface mounted
Base material	steel
Shade material	three-layer glass TRIPLEX OPAL
Base color	white Ral9003
Shade color	white - black
Holding the shade	folding system
Mounting location	ceiling/wall
Width	445 mm
Length	445 mm
Height	130 mm
Diameter	ø 445 mm
mounting holes (diameter)	4xØ5mm
Cable entrance	2xØ16mm
Energy Class	D
Impact strength	IK01
Operating temperature	from -20°C to +30°C

Electrical data

Power consumption	34 W
Ingress Protection	IP43
Socket	LED modul
Sensor	HF
terminal block	snap terminal block
Automatic circuit breaker type B10A	23 pcs
Automatic circuit breaker type B16A	37 pcs
Automatic circuit breaker type C10A	38 pcs
Automatic circuit breaker type C16A	62 pcs
Switching current	19 A / 288 µsec
Number of LED drivers	1

Luminous data

Lum. flux of luminaire	2530 lm
Lum. flux of light source	5050 lm
Luminaire efficacy	74 lm/W
Chromaticity temperature	3000 K
Rated life time LED L80/B10	100000 hours
CRI	Ra80
MacAdam	3

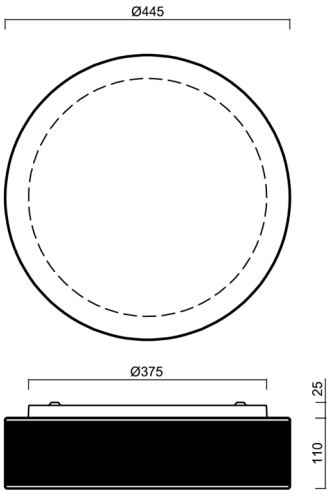

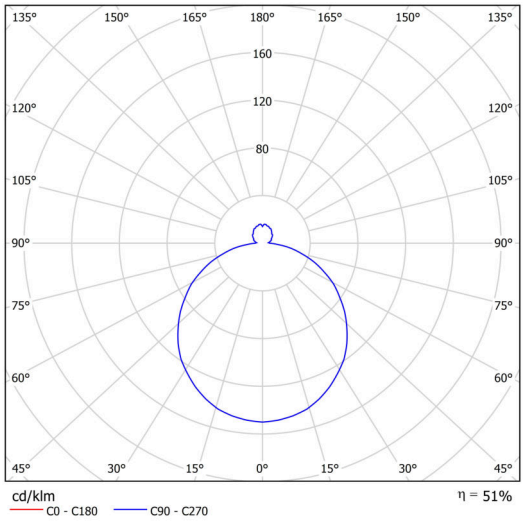

Blue light hazard	Risk group 0

Eulum data for calculation programs are available at www.osmont.cz.

Logistical data

EAN	8591728099282
Weight NTTO	5.87 Kg
Weight BTTO	6.4 Kg
Number of cartons	1 pcs
Package volume	0.033 m^3
Package 1 width	0.45 m
Package 1 length	0.45 m
Package 1 height	0.16 m
Warranty*	60 months

**The warranty for the batteries is valid for 36 months from the date of purchase.*

Installation dimensions:

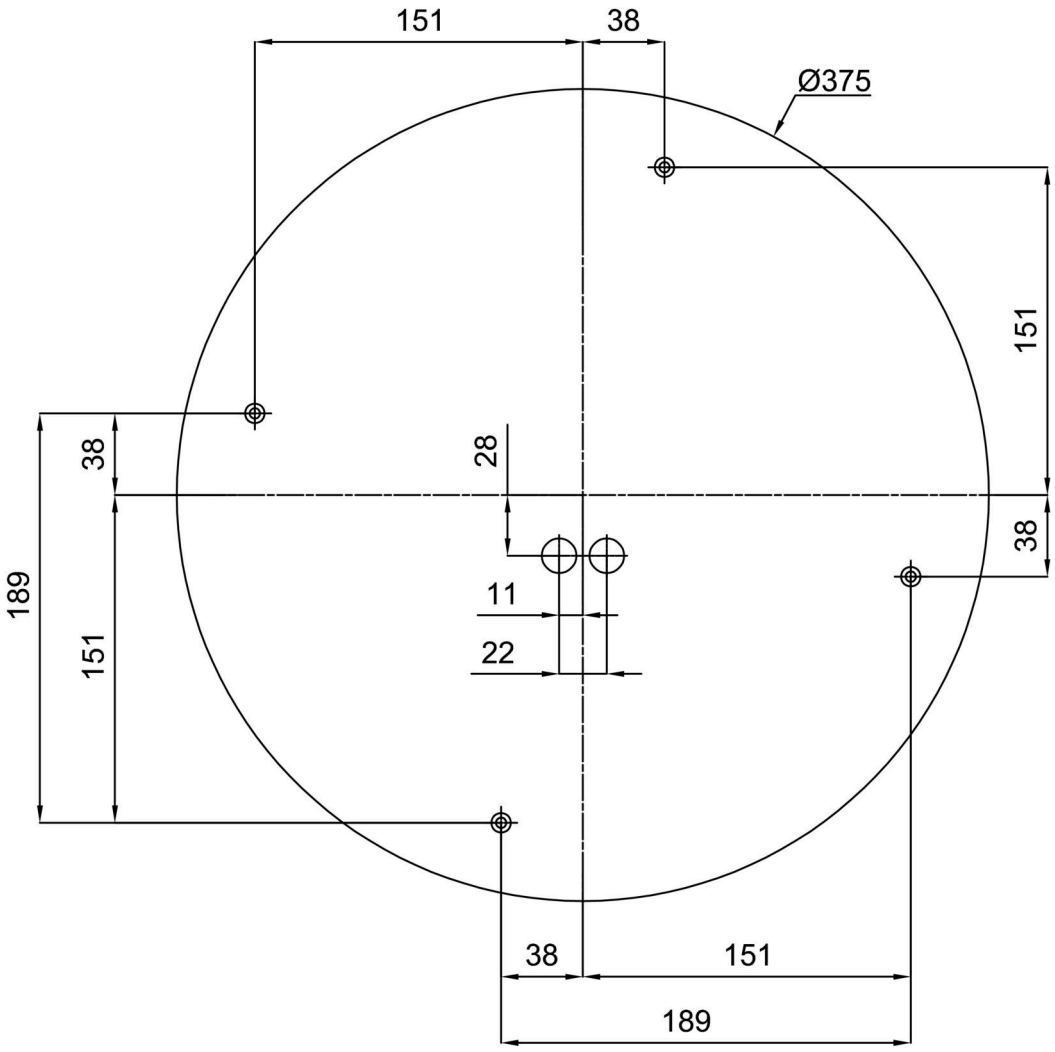

Additional assortment:

Base for surface mounting

Product code	Name	Color	Picture	Drawing
33517	KN8,K8/BP 2-1 B	white Ral9003		

Lampshade

Product code	Name	Color	Picture	Drawing
20132	413C	white - black		