



## IRIDA 2

---

LED-1L14E500BD13/PC63 HF CORR 3K#


[WWW.OSMONT.CZ](http://WWW.OSMONT.CZ)

# IRIDA 2

Product code: IRI71085



Type: LED-1L14E500BD13/PC63 HF CORR 3K#

Short description of the luminaire: White colour | ceiling or wall LED light with CORRIDOR function (DALI+HF sensor) | opal polycarbonate shade (PC)



## Technical data

Types of luminaires	Corridor
Mounting type	surface mounted
Base material	polypropylene composite
Shade material	opal polycarbonate
Base color	white Ral9003
Shade color	white
Holding the shade	bayonet
Mounting location	ceiling/wall
Width	268 mm
Length	268 mm
Height	76 mm
Diameter	ø 268 mm
mounting holes (diameter)	3xø5mm
Cable entrance	2xø16mm
Energy Class	D
Impact strength	IK10
Operating temperature	from -20°C to +30°C




## Electrical data

Power consumption	13 W
Ingress Protection	IP65
Socket	LED modul
Sensor	HF
terminal block	snap terminal block
Automatic circuit breaker type B10A	21 pcs
Automatic circuit breaker type B16A	35 pcs
Automatic circuit breaker type C10A	35 pcs
Automatic circuit breaker type C16A	58 pcs
Spínací proud	20 A / 133 sec

## Luminous data

Lum. flux of luminaire	1420 lm
Lum. flux of light source	2000 lm
Luminaire efficacy	109 lm/W
Chromaticity temperature	3000 K
Rated life time LED L80/B10	100000 hours
CRI	Ra80
MacAdam	3
Blue light hazard	Risk group 0

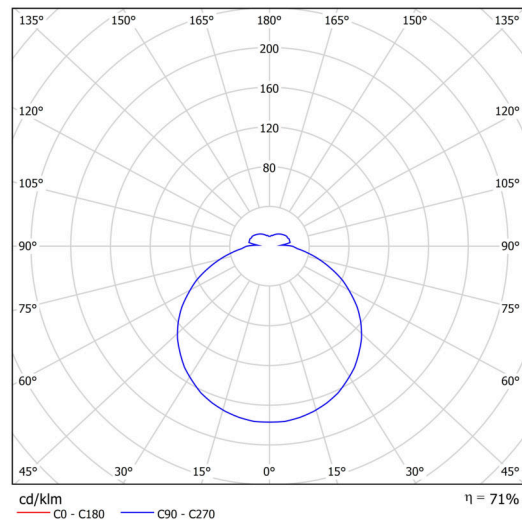


Eulum data for calculation programs are available at

Logistical data

EAN	8591728137854
Weight NTTO	0.6 Kg
Weight BTTO	0.8 Kg
Number of cartons	1 pcs
Package volume	0.01 m <sup>3</sup>
Package 1 width	0.28 m
Package 1 length	0.28 m
Package 1 height	0.125 m
Warranty*	60 months

\*The warranty for the batteries is valid for 36 months from the date of purchase.

Installation dimensions:

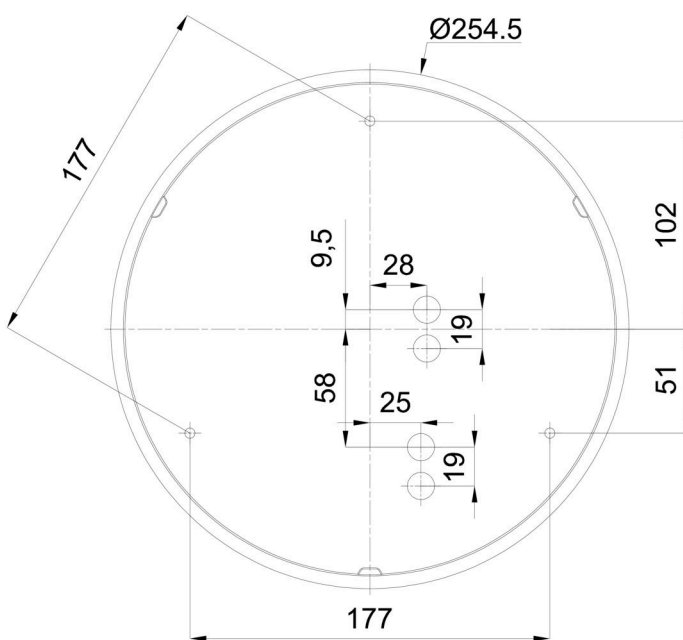

Additional assortment:

Lampshade

Product code	Name	Color	Picture	Drawing
20611	PC63	white		