IRIDA 2

LED-1L14E500BD13/PC63 DALI 3/35/4K#

WWW.OSMONT.CZ

IRIDA 2

Product code: IRI71092

Type: LED-1L14E500BD13/PC63 DALI 3/35/4K#

Short description of the luminaire: White colour | ceiling or wall LED light DALI | opal polycarbonate shade (PC)|

Technical data

Types of luminaires	Dimmable
Mounting type	surface mounted
Base material	polypropylene composite
Shade material	opal polycarbonate
Base color	white Ral9003
Shade color	white
Holding the shade	bayonet
Mounting location	ceiling/wall
Width	268 mm
Length	268 mm
Height	76 mm
Diameter	ø 268 mm
mounting holes (diameter)	3xØ5mm
Cable entrance	2xØ16mm
Energy Class	D
Impact strength	IK10
Operating temperature	from -20°C to +30°C



Electrical data

Power consumption	13 W
Ingress Protection	IP65
Socket	LED modul
terminal block	snap terminal block
Automatic circuit breaker type B10A	31 pcs
Automatic circuit breaker type B16A	50 pcs
Automatic circuit breaker type C10A	52 pcs
Automatic circuit breaker type C16A	85 pcs
Switching current	5 A / 50 µsec
Number of LED drivers	1

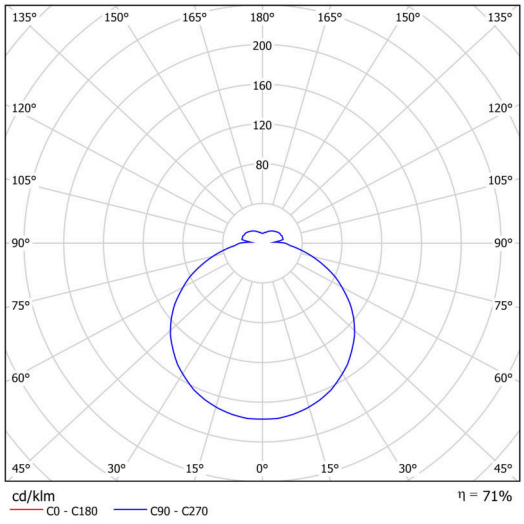

Luminous data

Lum. flux of luminaire	1420/1480 lm
Lum. flux of light source	2000/2080 lm
Luminaire efficacy	109 lm/W
Chromaticity temperature	3000/4000 K
Rated life time LED L80/B10	100000 hours
CRI	Ra80
MacAdam	3
Blue light hazard	Risk group 0

Eulum data for calculation programs are available at www.osmont.cz.

OSMONT, s.r.o.
HYBRÁLEC 129,
586 01 JIHLAVA, CZ

www.osmont.cz
osmont@osmont.cz
(+420) 567 210 023

Logistical data

EAN	8591728137922
Weight NTTO	0.67 Kg
Weight BTTO	0.9 Kg
Number of cartons	1 pcs
Package volume	0.008 m^3
Package 1 width	0.28 m
Package 1 length	0.28 m
Package 1 height	0.09 m
Warranty*	60 months

**The warranty for the batteries is valid for 36 months from the date of purchase.*

Installation dimensions:

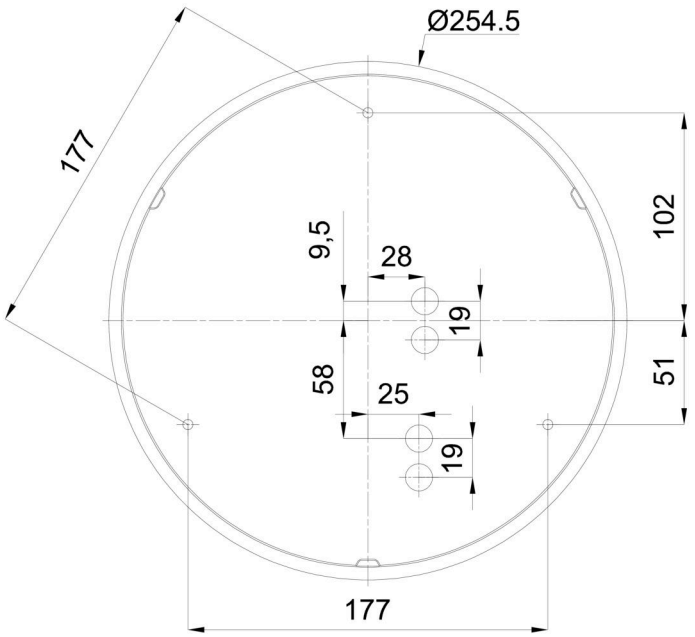

Additional assortment:

Decorative collar

Product code	Name	Color	Picture	Drawing
33538	BD13/KP C	black Ral9005		

Lampshade

Product code	Name	Color	Picture	Drawing
20611	PC63	white