IRIDA 2

LED-1L14E500BD13/PC63 NK3H 4K#

WWW.OSMONT.CZ

IRIDA 2

Product code: IRI71609

Type: LED-1L14E500BD13/PC63 NK3H 4K#

Short description of the luminaire: White colour | ceiling or wall LED light with emergency backup combined | opal polycarbonate shade (PC)|

Technical data

Types of luminaires	Emergency combined
Mounting type	surface mounted
Base material	polypropylene composite
Shade material	opal polycarbonate
Base color	white Ral9003
Shade color	white
Holding the shade	bayonet
Mounting location	ceiling/wall
Width	268 mm
Length	268 mm
Height	76 mm
Diameter	ø 268 mm
mounting holes (diameter)	3xØ5mm
Cable entrance	2xØ16mm
Energy Class	D
Impact strength	IK10
Operating temperature	from +5°C to +30°C

Electrical data

Power consumption	13 W
Ingress Protection	IP65
Socket	LED modul
Battery type	LiFePO4
Emergency time	3 hours
terminal block	snap terminal block
Automatic circuit breaker type B10A	16 pcs
Automatic circuit breaker type B16A	27 pcs
Automatic circuit breaker type C10A	25 pcs
Automatic circuit breaker type C16A	38 pcs
Number of LED drivers	1

Luminous data

Lum. flux of luminaire	1480 lm
Lum. flux of light source	2080 lm
Lum. flux of light source in emergency mode	200 lm
Luminaire efficacy	113 lm/W
Chromaticity temperature	4000 K
Rated life time LED L80/B10	100000 hours
CRI	Ra80
MacAdam	3



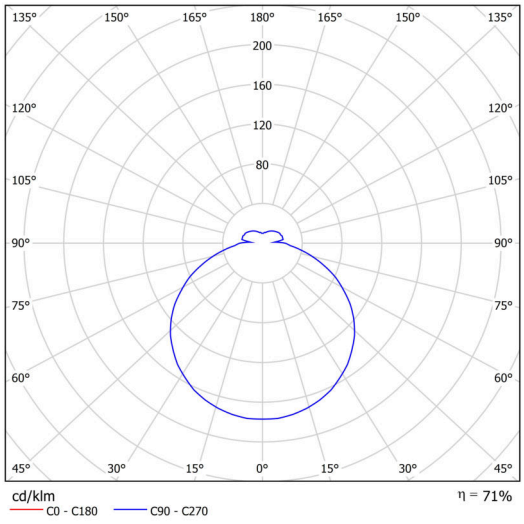

OSMONT, s.r.o.
HYBRÁLEC 129,
586 01 JIHLAVA, CZ

www.osmont.cz
osmont@osmont.cz
(+420) 567 210 023

Blue light hazard	Risk group 0

Eulum data for calculation programs are available at www.osmont.cz.

Logistical data

EAN	8591728177034
Weight NTTO	0.82 Kg
Weight BTTO	1 Kg
Number of cartons	1 pcs
Package volume	0.008 m^3
Package 1 width	0.28 m
Package 1 length	0.28 m
Package 1 height	0.09 m
Warranty*	60 months

**The warranty for the batteries is valid for 36 months from the date of purchase.*

Installation dimensions:

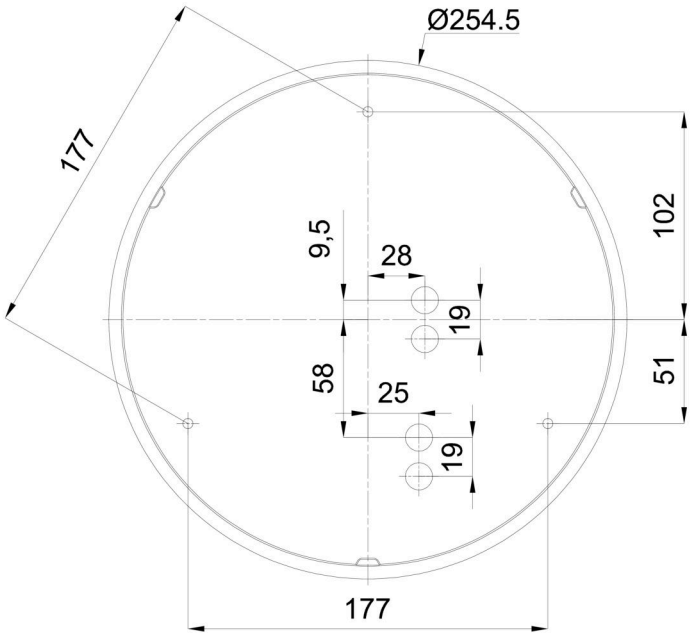

Additional assortment:

Decorative collar

Product code	Name	Color	Picture	Drawing
33538	BD13/KP C	black Ral9005		

Lampshade

Product code	Name	Color	Picture	Drawing
20611	PC63	white