TITAN 5

LED-9L52EMP1050KN11/PM11 4K##

WWW.OSMONT.CZ

TITAN 5

Product code: TIT48724

Type: LED-9L52EMP1050KN11/PM11 4K##

Short description of the luminaire: White colour | ceiling or wall LED light ON/OFF | multipower driver | PMMA shade|



Technical data

Types of luminaires	Classic on/off
Mounting type	surface mounted
Base material	steel
Shade material	opal polymethyl methacrylate
Base color	white Ral9003
Shade color	white
Holding the shade	folding system
Mounting location	ceiling/wall
Width	900 mm
Length	900 mm
Height	200 mm
Diameter	ø 900 mm
mounting holes (diameter)	3xØ5mm
Cable entrance	2xØ16mm
Energy Class	D
Impact strength	IK04
Operating temperature	from -20°C to +30°C

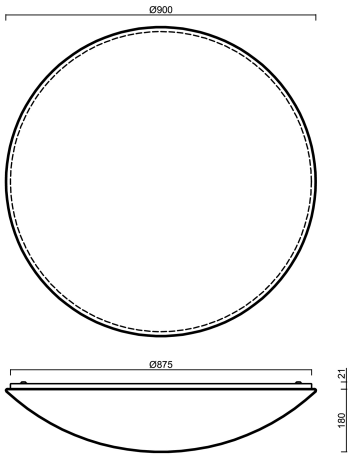

Electrical data

Power consumption	150 W
Ingress Protection	IP54
Socket	LED modul
terminal block	snap terminal block
Automatic circuit breaker type B10A	8 pcs
Automatic circuit breaker type B16A	13 pcs
Automatic circuit breaker type C10A	8 pcs
Automatic circuit breaker type C16A	13 pcs
Number of LED drivers	3

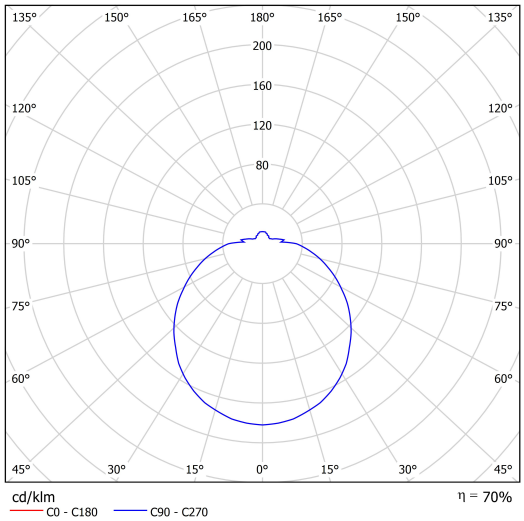

Luminous data

Lum. flux of luminaire	16600 lm
Lum. flux of light source	23720 lm
Luminaire efficacy	110 lm/W
Chromaticity temperature	4000 K
Rated life time LED L80/B10	100000 hours
CRI	Ra80
MacAdam	3
Blue light hazard	Risk group 0

Eulum data for calculation programs are available at www.osmont.cz.

OSMONT, s.r.o.
HYBRÁLEC 129,
586 01 JIHLAVA, CZ

www.osmont.cz
osmont@osmont.cz
(+420) 567 210 023

Multipower

Possibility of output adjustment by the user (DIP switch on the current source).

I [mA]	1050	1000	950	900	850	800	750	700
[%]	100	95	90	86	81	76	71	67

Logistical data

EAN	8591728129576
Weight NTTO	10.58 Kg
Weight BTTO	13.3 Kg
Number of cartons	1 pcs
Package volume	0.191 m^3
Package 1 width	0.22 m
Package 1 length	0.93 m
Package 1 height	0.93 m
Warranty*	60 months

**The warranty for the batteries is valid for 36 months from the date of purchase.*

Installation dimensions:

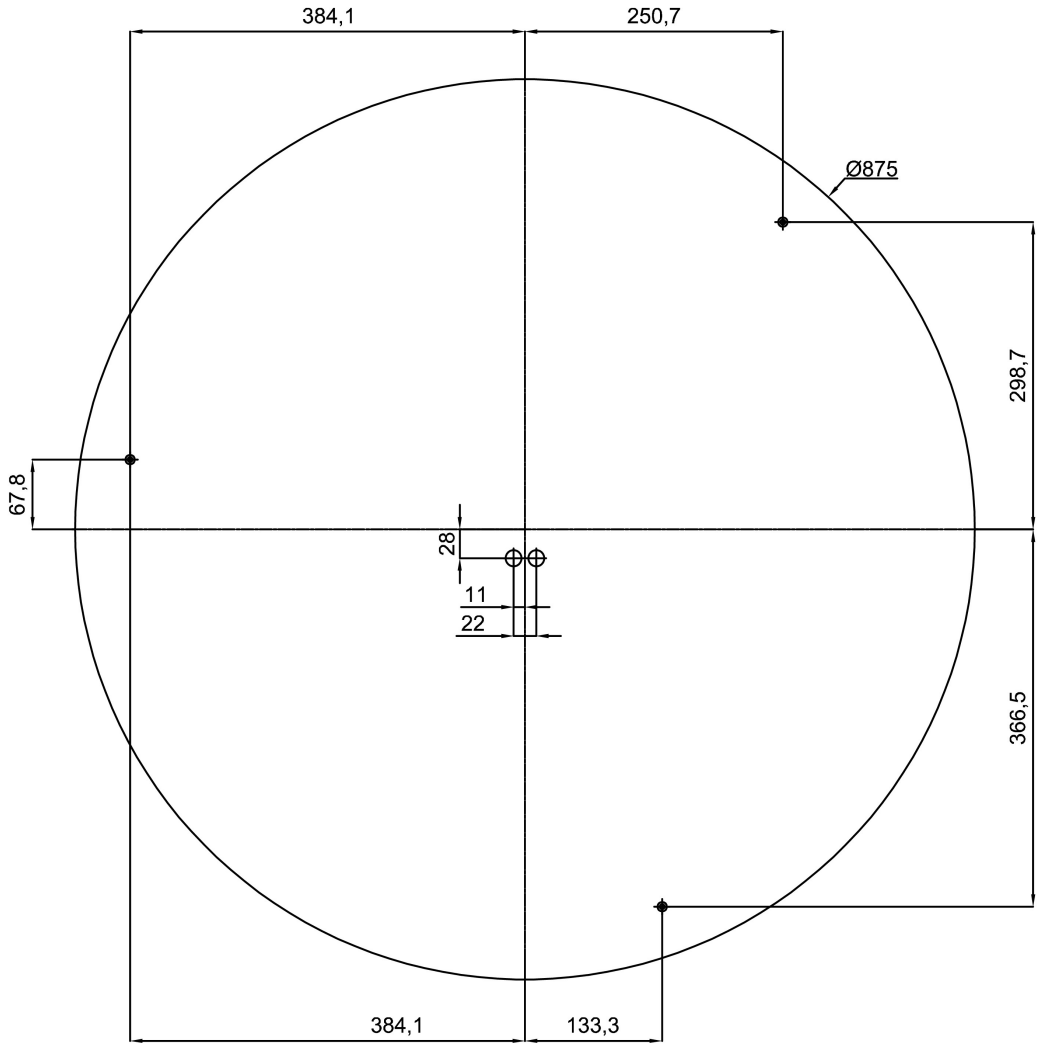

Additional assortment:

Lampshade

Product code	Name	Color	Picture	Drawing
20516	PM11	white		