



ALKOR D3

LED-5L06E300KN03P/407 B 4K#

WWW.OSMONT.CZ

ALKOR D3

Product code: ALK67606


Type: LED-5L06E300KN03P/407 B 4K#

Short description of the luminaire: White colour | ceiling or wall LED light ON/OFF | TRIPLEX OPAL hand blown glass shade|



Technical data

| | |
|---------------------------|--------------------------------|
| Types of luminaires | Classic on/off |
| Mounting type | surface mounted |
| Base material | steel |
| Shade material | three-layer glass TRIPLEX OPAL |
| Base color | white Ral9003 |
| Shade color | white |
| Holding the shade | folding system |
| Mounting location | ceiling/wall |
| Width | 184 mm |
| Length | 184 mm |
| Height | 276 mm |
| Diameter | ø 184 mm |
| mounting holes (diameter) | 3xø5mm |
| Cable entrance | 2xø16mm |
| Energy Class | D |
| Impact strength | IK01 |
| Operating temperature | from -20°C to +30°C |



Electrical data

| | |
|--------------------|---------------------|
| Power consumption | 14 W |
| Ingress Protection | IP44 |
| Socket | LED modul |
| terminal block | snap terminal block |

Luminous data

| | |
|-----------------------------|--------------|
| Lum. flux of luminaire | 2090 lm |
| Lum. flux of light source | 2380 lm |
| Chromaticity temperature | 4000 K |
| Rated life time LED L80/B10 | 100000 hours |
| CRI | Ra80 |
| MacAdam | 3 |
| Blue light hazard | Risk group 0 |

Eulum data for calculation programs are available at www.osmont.cz.



TECHNICAL SHEET




Logistical data

| | |
|-------------------|---------------|
| EAN | 8591728228217 |
| Number of cartons | 1 pcs |
| Warranty* | 60 months |


**The warranty for the batteries is valid for 36 months from the date of purchase.*

Installation dimensions:

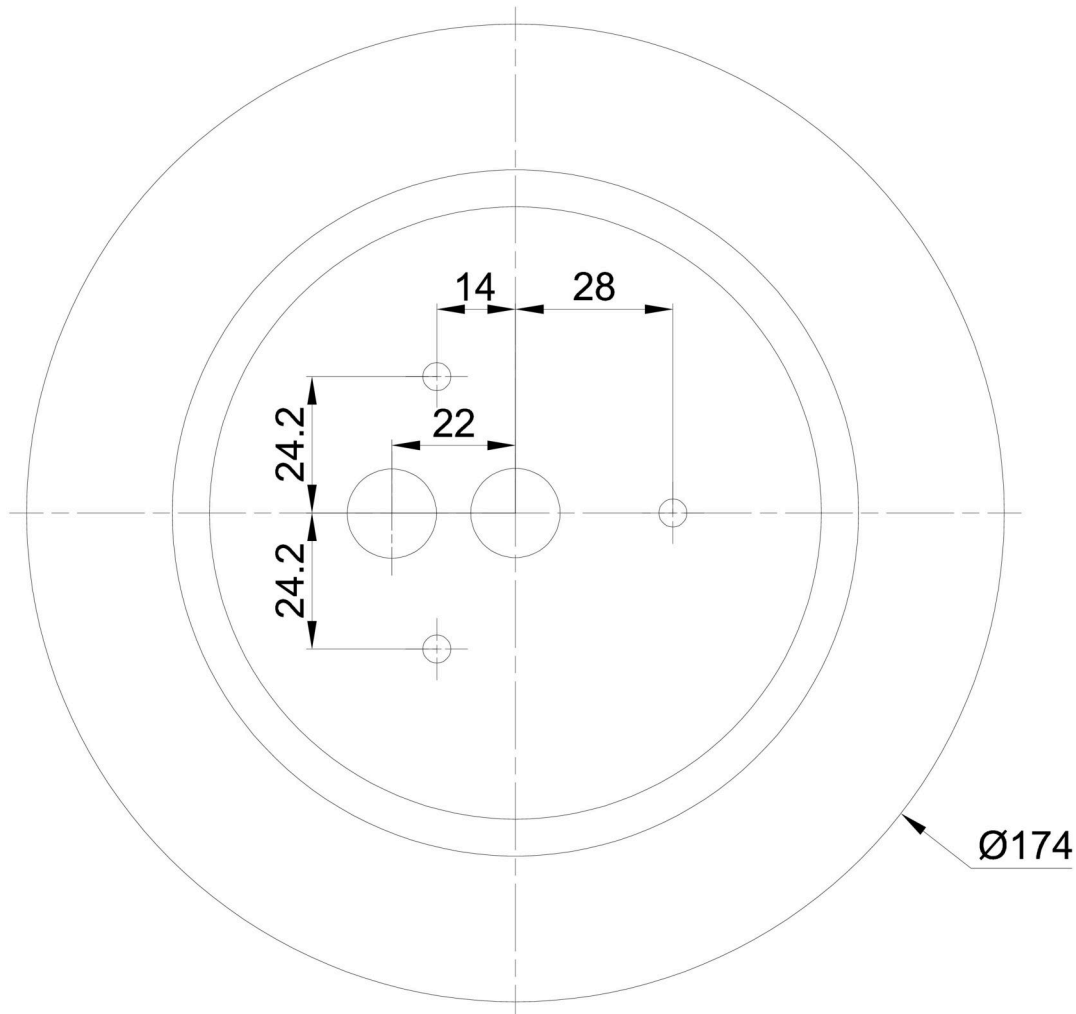

Additional assortment:

Lampshade

| Product code | Name | Color | Picture | Drawing |
|--------------|------|-------|---|---------|
| 20122 | 407 | white |  | |