



## DELIA D1

---

LED-1L14E700KN62/PC22/ DP SD DALI 4K#

[WWW.OSMONT.CZ](http://WWW.OSMONT.CZ)

# DELIA D1

Product code: DEL59505



Type: LED-1L14E700KN62/PC22/ DP SD DALI 4K#

Short description of the luminaire: Grey colour | ceiling or wall LED light DALI | opal polycarbonate shade (PC) with decorative collar



## Technical data

Types of luminaires	Dimmable
Mounting type	surface mounted
Base material	steel
Shade material	opal polycarbonate
Base color	grey Ral7040
Shade color	white
Holding the shade	folding system
Mounting location	ceiling/wall
Width	338 mm
Length	85 mm
Height	338 mm
Diameter	ø 338 mm
mounting holes (diameter)	2xø5mm
Cable entrance	2xø16mm
Energy Class	D
Impact strength	IK10
Operating temperature	from -20°C to +30°C




## Electrical data

Power consumption	18 W
Ingress Protection	IP54
Socket	LED modul
terminal block	snap terminal block

## Luminous data

Lum. flux of luminaire	1710 lm
Lum. flux of light source	2810 lm
Chromaticity temperature	4000 K
Rated life time LED L80/B10	100000 hours
CRI	Ra80
MacAdam	3
Blue light hazard	Risk group 0

Eulum data for calculation programs are available at [www.osmont.cz](http://www.osmont.cz).

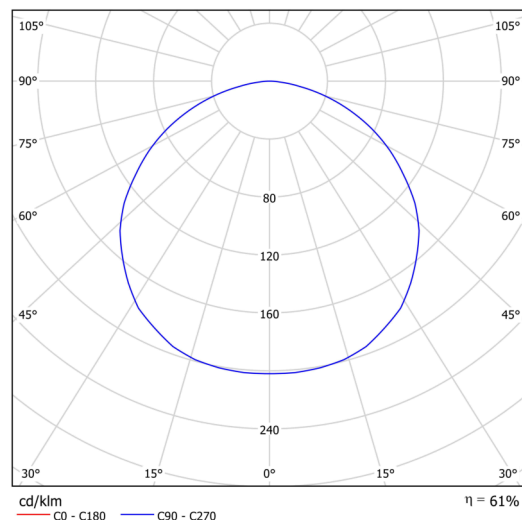

## TECHNICAL SHEET



### Logistical data

EAN	8591728193874
Number of cartons	1 pcs
Warranty*	60 months

*\*The warranty for the batteries is valid for 36 months from the date of purchase.*

### Additional assortment:

#### Lampshade

Product code	Name	Color	Picture	Drawing
20520	PC22	white	